



UWL REPOSITORY

repository.uwl.ac.uk

Novel approaches in GPR data processing for health monitoring of trees

Alani, Amir, Giannakis, Iraklis, Soldovieri, Francesco, Benedetto, Francesco and Tosti, Fabio ORCID: <https://orcid.org/0000-0003-0291-9937> (2020) Novel approaches in GPR data processing for health monitoring of trees. In: International Radar Symposium 2020, 5-8 October 2020, Warsaw, Poland. (In Press)

This is the Accepted Version of the final output.

UWL repository link: <https://repository.uwl.ac.uk/id/eprint/6924/>

Alternative formats: If you require this document in an alternative format, please contact: open.research@uwl.ac.uk

Copyright:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy: If you believe that this document breaches copyright, please contact us at open.research@uwl.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.

Novel Approaches in GPR Data Processing for Health Monitoring of Trees

Amir M. Alani¹, Iraklis Giannakis¹, Francesco Soldovieri², Francesco Benedetto³, Fabio Tosti¹

¹School of Computing and Engineering, University of West London (UWL)
St Mary's Road, Ealing, W5 5RF, London, UK

Amir.Alani@uwl.ac.uk; Iraklis.Giannakis@uwl.ac.uk; Fabio.Tosti@uwl.ac.uk

²Institute for Electromagnetic Sensing of the Environment, National Research Council
Via Diocleziano 328, 80124, Naples, Italy
soldovieri.f@irea.cnr.it

³Signal Processing for Telecommunication and Economics Lab., University of Roma Tre
Via Vito Volterra 62, 00146, Rome, Italy
francesco.benedetto@uniroma3.it

Abstract— The aggressive fungal attack is seriously threatening tree species in forests and woodlands in the UK and beyond. A lot has been said about the spread of disease and fungal attack on ash and oak trees in the United Kingdom and European countries. Within this context, Ground Penetrating Radar (GPR) has emerged as one of the most promising non-destructive testing (NDT) methods for acquisition of information about the internal structure of trees in terms of defect and their root system architecture. Nevertheless, current research has shown that there exists limited information and in depth studies within this important area of endeavour. This review paper reports on the current advances made within the context of GPR applications in health monitoring and assessment of trees and tree roots. This paper also discusses and reports on new areas of development including, the reverse-time migration, the microwave tomography and the pattern-recognition approaches within the signal processing and image analysis (interpretation) contexts.

Keywords— *tree health monitoring, ground penetrating radar (GPR), reverse-time migration, microwave tomography, pattern recognition, tree trunk decay and cavities, tree root mapping*

I. INTRODUCTION

Proper maintenance of the ecosystem and conservation of the overall climate conditions are strictly connected with the proper management, health monitoring and protection of forests [1]. To this effect, it is known that the actions of insects and diseases present a serious threat to tree health within European territories [2, 3] and may eventually lead to the complete extinction of certain tree species [4]. Within this context, the current greatest threats are undoubtedly the fungi provoking ash dieback and acute oak decline (AOD) [5], [6].

First signs of the ash dieback disease in Europe date back to 1992, whereas it was first reported in the United Kingdom (UK) in 2012 [7]. Only a few ash species can resist to this disease, and it is predicted that the majority of these trees will die within the next two decades [8]. AOD is similarly very harmful in view of its rapid development within the UK area [6] and the level of aggressiveness that causes tree death within a short time frame, usually a few years [9].

Within this context, an early-stage disease diagnosis is fundamental to identify decayed trees and provide timely remedial actions. A major challenge in this area of endeavour is that early decay can be located in the inner core of the tree without any visible signs of disease on the bark [10]. Tree decay usually develops internally along the stem as hollows or rotten woods and assume a cylindrical shape.

In terms of available assessment methods for decay detection in trees, core-drilling is still the most used. However, the method is fully destructive and can induce further decay around the testing area [11]. To this effect, the use of non-destructive testing (NDT) methods, such as resistograph testing [12], electrical resistivity tomography (ERT) [13], infrared thermography [14], ultrasound tomography [15, 16] and X-ray tomography [17] were reported in this area of endeavour. Within the available electromagnetic (EM) methods, microwave tomography has proven its viability [18]. Use of common offset GPR systems has been successfully proven for large-scale applications in forestry engineering, especially in regard to the monitoring of tree trunks [19]–[21] and root systems [22]–[26] (Fig. 1).

A main constraint in terms of the application of GPR data processing techniques for tree trunk investigations is that traditional processing methods cannot be used due to the cylindrical-like configuration of the trunks and the internal anomalies. Also, it was questionable the full effectiveness of the available GPR processing techniques for the detection of decay in terms of type and location, such as early disease close to the bark, major decay within the tree core areas, bark inclusions etc. To this effect, this paper reports a review on the most recent advances achieved within the context of new data processing approaches in GPR for health monitoring of trees. In particular, the reverse-time (RT) migration approach, the microwave tomography approach and the pattern-recognition approach are discussed. In regard to the use of the RT and the microwave tomography approach in the present work, the case of a set of measurement profiles at a constant height and encircling the sections of the trunk is specifically considered. The pattern-recognition approach is instead discussed within the context of detecting root system architecture.

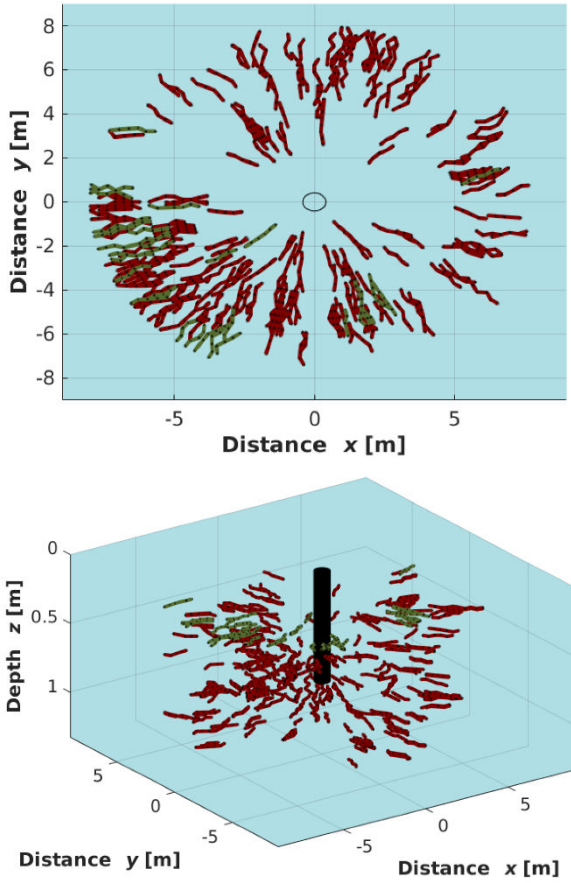


Fig. 1. 2-D planar view (a) and 3-D rendering (b) of the root system architecture investigated in [27].

II. THE REVERSE TIME-MIGRATION APPROACH

Reverse-time (RT) migration is based on the exploding reflector model. The latter assumes that subsurface targets can be approximated by equivalent sources that are triggered when reached by the incident field [28]. Consequently, propagating the received fields back in time -using the right electromagnetic velocity model- will force the fields to collapse at the location of potential scatterers [28].

As an example, in the paper proposed by [29], the received fields are propagated back in time using the Finite-Difference Time-Domain (FDTD) method. A 2D configuration has been chosen in order to reduce the computational requirements. The employed spatial step equals with $\Delta x = \Delta y = 2 \text{ mm}$ while the time-step was chosen based on the Courant limit [29]. The boundaries of the grid are truncated using the time-synchronised convolutional perfectly matched layer [30] with ten layers thickness. The velocity is assumed to be homogenous within the trunk and is estimated indirectly based on focusing criteria [28]. In particular, a criterion exploiting the entropy of the retrieved image is used in order to choose what is the most focussed reconstructed image on dependence of the dielectric permittivity of the homogeneous background [28]. To compensate the two-way travel time, the simulated velocity should be half the actual one. Therefore, the implemented permittivity has to be four times higher than the estimated bulk permittivity of the trunk [31].

The FDTD grid is excited by multiple sources that are placed at the position of the measurements. The waveforms of the sources are the received signals reversed in time after applying time-zero correction, time-varying gain and a

singular value decomposition filter [31]. Notice that the reversed received field should be interpolated in order to be synchronous with the time-step of the employed FDTD [31].

Finally, the migrated image is subject to a post-processing scheme in order to remove migration artefacts and furthermore increase the overall signal-to-clutter ratio. The focussed fields are initially squared and subsequently smoothed using a Gaussian blur filter [31].

RT migration has been successfully validated using both numerical and experimental data (Fig. 2). Artificially created decay of various sizes were successfully detected regardless of their position [31]. Larger decay were more clearly detectable while smaller decay required a more exhaustive pre-processing in order to remove the ringing noise due to the layered nature of the trunk [31].

III. THE MICROWAVE TOMOGRAPHY APPROACH

The microwave tomography approach used within the context of tree health monitoring is based on a linearised model of the EM scattering exploiting the Born Approximation (BA) [32]. It is known that BA allows for a quantitative reconstruction of the targets only in the case of anomalies with a weak electromagnetic contrast compared to the host medium. In case the assumption of weak scattering does not hold, an inverse scattering approach based on BA can be still used to detect, locate and gain an estimation of the geometrical shape of the targets [33].

In the research presented in [34] and [35], an inverse scattering approach exploiting a multi-monostatic/multi-frequency configuration (which is the typical configuration for a GPR survey) is adopted. A 2D geometry is considered where the measurement points are located on a domain at a constant height and encircling the slice of the trunk under investigation. The host medium (inside of the trunk) is assumed as homogeneous and characterised by an equivalent dielectric permittivity.

The unknown of the problem is the contrast function accounting for the relative difference in the dielectric properties of the targets [32, 33]. More specifically, solution is given under the form of a spatial map (image) of the contrast function for the inner region of the trunk. Information about the location and the geometry of the targets are retrieved at the areas of the trunk with the highest values of the amplitude of the contrast function.

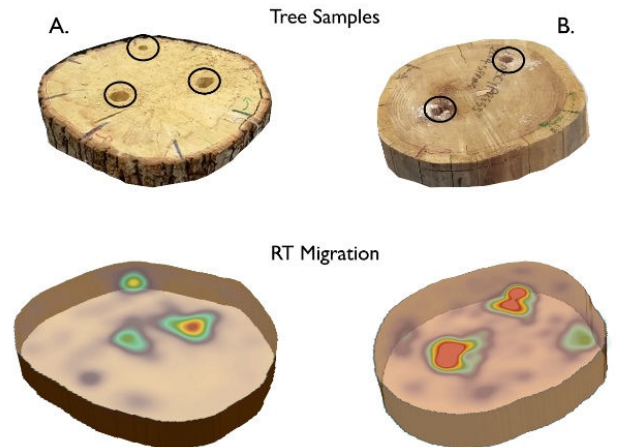


Fig. 2. Two tree samples and their corresponding reconstructed internal structure using reverse-time (RT) migration. The artificially created decay are highlighted with circles [31].

In regard to the results presented in [34] and [35], the raw data are collected in the time domain whereas the input data to the inverse scattering approach are given in the frequency domain. To this effect, a pre-processing stage on raw data (in time domain) is required to achieve the input data (in frequency domain) to the inverse scattering approach. The pre-processing accounts for the following steps:

- zero timing;
- time-gating;
- background removal;
- linear gain versus time (depth);
- Fourier transform of the filtered raw data.

The tomographic inversion is performed after the pre-processing stage. More in detail, a Truncated Singular Value Decomposition (TSVD) is applied to make the linear inversion, as a regularisation scheme in order to obtain a robust and physically meaningful solution [32, 33]. Results have proven effective in identifying and locating all the targets. Specifically, it was observed that reflections from targets closer to the bark are stronger than the reflections from targets located more internally in the cross-section [35].

IV. THE PATTERN-RECOGNITION APPROACH

Tree roots in GPR images are usually represented by hyperbolic patterns, comparable to other linear objects such as pipes and cables. Methods for automatic recognition of these mainly linear objects in GPR images can be classified mainly into three types: machine learning based methods, clustering based methods, and Hough transform (HT)-based methods [36]. Machine learning approaches usually require a training process, and the accuracy of recognition results depends on the quality and quantity of the training data [37]-[39], which limits the application. Traditional clustering methods usually require prior knowledge on the number of the clusters, and are not able to detect noisy and interfering hyperbolas. The authors in [40], [41] developed an algorithm named GamRec to handle these problems. However, it was only tested in synthetic radargrams, its application accuracy in practical radargrams is still unknown. Conversely, the HT is a typical algorithm to detect hyperbolic patterns in GPR images. The HT algorithm was first proposed in 1962 by Hough for detecting imperfect curves with certain shapes [42], [43]. It is based on the transformation from a variable-space to the parameter-space. The randomized Hough transform (RHT), as one of the popular variants of the Hough transform [44]-[46], applies random sampling and converging mapping strategy to overcome the drawbacks of Hough transform regarding computational cost, detection accuracy, and resistance to noise [45], [46]. As a result, the RHT has been applied widely in actual automatic recognition of landmines and pipelines in GPR images [47]-[50].

Although the Hough transform class method has been applied successfully for the automatic recognition of objects such as buried pipes and cables in GPR images, few works have been done to evaluate this method in the identification of underground root systems [51]. Thus far, the influence of root system features on the pattern recognition on GPR images remains unclear. Although a single root and a single pipe share similar hyperbolic pattern on GPR image, root systems possess more complex characteristics than underground pipes or cables: (i) the size and depth of roots are uncertain; (ii) the

directions and angles of root stretching are variable; (iii) the distribution range of root systems is not certain; and (iv) the soil environment where roots grow is more complex. These factors render the automatic identification of root systems more difficult than pipes in GPR images. Nonetheless, the work in [52] applies the RHT for the automatic recognition of root signals in GPR images in both controlled and in situ experiments. The results show acceptable accuracy for most of the datasets with a recognition rate of approximately 80% and a false alarm rate of less than 1.5/m. More recently, the research in [53] represents the first study that combines direct measurements of permittivity and GPR forward modelling techniques. Harvesting and measurement of tree root permittivity is possible, though the process is time-consuming and must be done carefully. The contact between root segment and probe remains a potentially problematic issue, although this can be overcome by collecting a large number of measurements and removing any potential outlier. Future research should focus on including correlations between GPR signals characteristics (e.g. time delays, amplitudes, frequency peaks) and trees and root trees conditions.

V. CONCLUSIONS AND FUTURE PROSPECTS

This paper reports a review on the current advances made within the context of GPR applications in health monitoring and assessment of trees and tree roots. This paper also discusses and reports on new areas of development including, the reverse-time (RT) migration, the microwave tomography and the pattern-recognition approaches within the signal processing and image analysis (interpretation) contexts.

In particular, the RT migration approach and the microwave tomography approach have proven to be viable to detect decay of various size and at different locations within the trunk cross-section. The pattern-recognition approach discussed in this paper is potentially deployable for improving state-of-the-art research within the context of mapping tree root system architecture.

ACKNOWLEDGMENTS

This paper is dedicated to the memory of Jonathan West; a friend, a colleague, a forester, a conservationist and an environmentalist, who died following an accident in the woodland that he loved.

The authors would like to express their sincere thanks and gratitude to the following trusts, charities, organisations and individuals for their generosity in supporting this project: Lord Faringdon Charitable Trust, The Schroder Foundation, Cazenove Charitable Trust, Ernest Cook Trust, Sir Henry Keswick, Ian Bond, P. F. Charitable Trust, Prospect Investment Management Limited, The Adrian Swire Charitable Trust, The John Swire 1989 Charitable Trust, The Sackler Trust, The Tanlaw Foundation, and The Wyfold Charitable Trust.

REFERENCES

- [1] Y. Pan, R. A. Birdsey, J. Fang, R. Houghton, P. E. Kauppi, W. A., Kurz, [...] D. Hayes, "A large and persistent carbon sink in the world's forests," *Science*, vol. 19, pp. 988-993, 2011.
- [2] R. J. Mitchell, J. K. Beaton, P. E., Bellamy, A. Broome, J. Chetcutti, S. Eaton [...], S. Woodward, "Ash dieback in the UK: A review of the ecological and conservation implications and potential management options," *Biological Conservation*, vol. 175, pp. 95-109.
- [3] Green Paper on Forest Protection and Information in the EU: Preparing forests for climate change, SEC, 2010.

- [4] C. Potter, T. Harwood, J. Knight, I. Tomlinson, "Learning from history, predicting the future: the UK Dutch elm disease outbreak in relation to contemporary disease threats," *Philosophical Transactions of The Royal Society*, vol. 366, pp. 1966–1974, 2011.
- [5] M. McMullan, M. Rafiqi, G. Kaithakottil, D. J., Clavijo, L. Bilham, E. Orton [...], M. D. Clark, "The ash dieback invasion of Europe was founded by two genetically divergent individuals," *Nature Ecology and Evolution*, vol. 2, pp. 1000–1008, 2018.
- [6] N. Brown, D. J.G. Inward, M. Jeger and S. Denman, "A review of *Agrilus biguttatus* in UK forests and its relationship with acute oak decline," *Forestry: An International Journal of Forest Research*, vol. 88, no. 1, pp. 53–63, 2015.
- [7] S. Papic, R. Longauer, I. Milenkovic, J. Rozsypalek, "Genetic predispositions of common ash to the ash dieback caused by ash dieback fungus," *GENETIKA*, vol. 25, no. 1, pp. 221–229, 2018.
- [8] R. Worrell, "An Assessment of The Potential Impacts of Ash Dieback in Scotland, Commissioned by Forestry Commission Scotland, 2013.
- [9] N. Brown, "Epidemiology of acute oak decline in Great Britain, PhD thesis submitted at Imperial College London, 2014.
- [10] S. Denman, N. Brown, S. Kirk, M. Jeger and J. Webber, "A description of the symptoms of Acute Oak Decline in Britain and a comparative review on causes of similar disorders on oak in Europe," *Forestry: An International Journal of Forest Research*, vol. 87, no. 4, pp. 535–551, 2014.
- [11] W. C. Shortle, K. R. Dudzik, *Wood Decay in Living and Dead Trees: A Pictorial Overview*, U.S. FOREST SERVICE, 2012.
- [12] L. Costello and S. Quarles, "Detection of wood decay in blue gum and elm: An evaluation of the Resistograph and the portable drill," *Journal of Arboriculture*, vol. 25, pp. 311–317, 1999.
- [13] S. A., Hagrey, "Electrical resistivity imaging of tree trunks," *Near Surface Geophysics*, vol. 4, pp. 179–187, 2006.
- [14] A. Catena, "Thermography shows damaged tissue and cavities present in trees," *Nondestructive Characterization of Materials*, vol. 11, pp. 515–522.
- [15] L. V. Socco, L. Sambuelli, R. Martinis, E. Comino, G. Nicolotti, "Feasibility of ultrasonic tomography for nondestructive testing of decay on living trees," *Research in Nondestructive Evaluation*, vol. 15, no. 1, pp. 31–54, 2004.
- [16] A. M. Alani, J. Chambers, P. Melarange, L. Lantini, F. Tosti, "The Use of Ultrasonic Tomography for the Non-destructive Assessment of Tree Trunks," *EGU General Assembly*, EGU2020-20872.
- [17] Q. Wei, B. Leblon, and L. A. Rocque, "On the use of X-ray computed tomography for determining wood properties: a review," *Can. J. For. Res.* vol. 41, pp. 2120–2140, 2001.
- [18] F. Boero, A. Fedeli, M. Lanini, M. Maffongelli, R. Monleone, M. Pastorino, A. Randazzo, A. Slvade and A. Sansalone, "Microwave Tomography for the Inspection of Wood Materials: Imaging System and Experimental Results," *IEEE Transactions on Microwave Theory and Techniques*, vol. 66, no. 7, pp. 3497–3510, July 2018.
- [19] G. Nicolotti, L.V. Socco, R. Martinis, A. Godio, and L. Sambuelli, "Application and comparison of three tomographic techniques for detection decay in trees," *J. Arboric.* vol. 29, pp. 66–78, 2003.
- [20] H. Lorenzo, V. Prez-Gracia, A. Novo, and J. Armesto, "Forestry applications of ground-penetrating radar," *For. Syst.*, vol. 19, pp. 5–17, 2010.
- [21] J. Jezova, L. Mertens and S. Lambot, "Ground-penetrating radar for observing tree trunks and other cylindrical objects," *Construction and Building Materials*, vol. 123, pp. 214–225, 2016.
- [22] S. A. Al Hagrey, "Geophysical imaging of root-zone, trunk, and moisture heterogeneity," *J. Exp. Bot.* vol. 58, pp. 839–854, 2007.
- [23] A.M. Alani, L. Bianchini Ciampoli, L. Lantini, F. Tosti, and A. Benedetto, "Mapping the root system of matured trees using ground penetrating radar", 17th International Conference on Ground Penetrating Radar, 18–21 Jun 2018, Rapperswil, Switzerland.
- [24] F. Tosti, L. Bianchini Ciampoli, M. G. Brancadoro, and A. Alani, "GPR applications in mapping the subsurface root system of street trees with road safety-critical implications", *Advances in transportation studies*, vol. 44, 2018.
- [25] L. Lantini, R. Holleworth, D. Egyir, I. Giannakis, F. Tosti, and A. M. Alani, "Use of ground penetrating radar for assessing interconnections between root systems of different matured tree species," in *Proc. MetroArchaeo*, 2018, Italy.
- [26] J. Jezova, J. Harou and S. Lambot, "Reflection waveforms occurring in bistatic radar testing of columns and tree trunks," *Construction and Building Materials*, vol. 174, pp. 388–400, 2018.
- [27] L. Lantini, F. Tosti, I. Giannakis, D. Egyir, A. Benedetto, and A. M. Alani, "A Novel Processing Framework for Tree Root Mapping and Density Estimation using Ground Penetrating Radar," *Conference Proceedings, 10th International Workshop on Advanced Ground Penetrating Radar*, Sep 2019, Volume 2019, p.1 – 6.
- [28] C. J. Leuschen and R. G. Plumb, "A matched-filter-based reverse-time migration algorithm for ground-penetrating radar data," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 39, no. 5, pp. 929–936, 2001.
- [29] A. Taflove and S. C. Hagness, *Computational Electrodynamics: The Finite-Difference Time-Domain Method*, 2nd ed. Norwood, MA, USA: Artech House, 2000.
- [30] I. Giannakis and A. Giannopoulos, "Time-synchronized convolutional perfectly matched layer for improved absorbing performance in FDTD," *IEEE Antennas and Wireless Propagation Letters*, vol. 14, pp. 690–693, 2015.
- [31] I. Giannakis, F. Tosti, L. Lantini and A. M. Alani, "Diagnosing Emerging Infectious Diseases of Tress Using Ground Penetrating Radar," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 58, no. 2, pp. 1146–1155, 2020.
- [32] R. Solimene, I. Catapano, G. Gennarelli, A. Cuccaro, A. Dell'Aversano, and F. Soldovieri, "SAR imaging algorithms and some unconventional applications," *IEEE Signal Process. Mag.*, vol. 31, no. 4, pp. 90–98, 2014.
- [33] I. Catapano, G. Gennarelli, G. Ludeno, R. Persico, and F. Soldovieri, "Ground Penetrating Radar: Operation Principle and Data Processing", in J. Webster (ed.), *Wiley Encyclopedia of Electrical and Electronics Engineering*, 2019 John Wiley & Sons, Inc. DOI: 10.1002/047134608X.W8383.
- [34] A.M. Alani, F. Soldovieri, G. Gennarelli, I. Giannakis, I. Catapano, L. Lantini, G. Ludeno and F. Tosti, "A Tomographic Inversion Approach for the Detection of Decay and Cavities in Tree Trunks using Ground Penetrating Radar", 10th International Workshop on Advanced Ground Penetrating Radar, Sep 2019, Volume 2019, p.1 – 6.
- [35] A.M. Alani, F. Soldovieri, I. Catapano, Giannakis, I. G. Gennarelli, L. Lantini, G. Ludeno and F. Tosti, "The Use of Ground Penetrating Radar and Microwave Tomography for the Detection of Decay and Cavities in Tree Trunks", *Remote Sens.* 2019, 11, 2073.
- [36] H. Chen, and A. Cohn, Probabilistic robust hyperbola mixture model for interpreting ground penetrating radar data. In *Proceedings of the International Joint Conference on Neural Networks (IJCNN)*, Shanghai, China, 6–9 June 2010; pp. 1–8.
- [37] E. Pasolli, F. Melgani, and M. Donelli, *Automatic Analysis of GPR Images: A Pattern-Recognition Approach*. *IEEE Trans. Geosci. Remote Sens.* 2009, 47, 2206–2217.
- [38] C. Maas, and J. Schmalzl, Using pattern recognition to automatically localize reflection hyperbolas in data from ground penetrating radar. *Comput. Geosci.* 2013, 58, 116–125.
- [39] S. Birkenfeld, Automatic detection of reflexion hyperbolas in GPR data with neural networks. In *Proceedings of the 2010 World Automation Congress*, Kobe, Japan, 19–23 September 2010; pp. 1189–1194.
- [40] R. Janning, A. Busche, T. Horváth, and L. Schmidt-Thieme, Buried pipe localization using an iterative geometric clustering on GPR data. *Artif. Intell. Rev.* 2014, 42, 403–425.
- [41] R. Janning, T. Horváth, A. Busche, and L. Schmidt-Thieme, GamRec: A Clustering Method Using Geometrical Background Knowledge for GPR Data Preprocessing. In *Proceedings of the Artificial Intelligence Applications and Innovations*, Halkidiki, Greece, 27–30 September 2012; pp. 347–356.
- [42] R.O. Duda, and P.E. Hart, Use of the Hough transformation to detect lines and curves in pictures. *Commun. ACM* 1972, 15, 11–15.
- [43] C.H. Paul, *Method and Means for Recognizing Complex Patterns*. U.S. Patent 3,069,654, 18 December 1962.
- [44] L. Xu, and E. Oja, P. Kultanen, A new curve detection method Randomized Hough transform (RHT). *Pattern Recognit. Lett.* 1990, 11, 331–338.
- [45] L. Xu, A5 problem solving paradigm: A unified perspective and new results on RHT computing, mixture based learning, and evidence combination. In *Proceedings of the 2005 IEEE International Conference on Granular Computing*, Beijing, China, 25–27 July 2005; pp. 70–77.

- [46] L. Xu, and E. Oja, Randomized Hough transform (RHT): Basic mechanisms, algorithms, and complexities. *CVGIP Image Underst.* 1993, 57, 131–154.
- [47] A. Simi, S. Bracciali, and G. Manacorda, Hough transform based automatic pipe detection for array GPR: Algorithm development and on-site tests. In *Proceedings of the Radar Conference, Rome, Italy*, 26–30 May 2008; pp. 1–6.
- [48] G. Borgioli, L. Capineri, P.L. Falorni, S. Matucci, and C.G. Windsor, The Detection of Buried Pipes From Time-of-Flight Radar Data. *IEEE Trans. Geosci. Remote Sens.* 2008, 46, 2254–2266
- [49] C. Windsor, L. Capineri, P. Falorni, S. Matucci, and G. Borgioli, The estimation of buried pipe diameters using ground penetrating radar. *Insight-Non-Destr. Test. Cond. Monit.* 2005, 47, 394–399
- [50] P. Falorni, L. Capineri, L. Masotti, and G. Pinelli, 3-D radar imaging of buried utilities by features estimation of hyperbolic diffraction patterns in radar scans. In *Proceedings of the Tenth International Conference on Ground Penetrating Radar, Delft, The Netherlands*, 21–24 June 2004; pp. 403–406.
- [51] W.L. Song, X. Yang, L.I. Ke-Xin, H.M. Jia, Tree root GPR target detection based on the gradient magnitude and modified Hough transform. *J. For. Univ.* 2013, 35, 108–112.
- [52] W. Li, X. Cui, L. Guo, J. Chen, Xu. Chen and X. Cao, “Tree Root Automatic Recognition in Ground Penetrating Radar Profiles Based on Randomized Hough Transform”, *Remote Sens.*, 8(5), 430, 2016.
- [53] A. E. Mihai, A. G. Gere, G. Curioni, P. Atkins, and F. Hayati, “Direct measurements of tree root relative permittivity for the aid of GPR forward models and site surveys”, *Near Surface Geophysics*, 17 (3), pp. 299-310, 2019.