



UWL REPOSITORY

repository.uwl.ac.uk

Constructing a smart framework for supplying the biogas energy in green buildings using an integration of response surface methodology, artificial intelligence and petri net modelling

Shahsavari, Mohammad M., Akrami, Mehran, Gheibi, Mohammad, Kavianpour, Babak, Fathollahi-Fard, Amir M. and Behzadian, Kourosh ORCID logo ORCID: <https://orcid.org/0000-0002-1459-8408>
(2021) Constructing a smart framework for supplying the biogas energy in green buildings using an integration of response surface methodology, artificial intelligence and petri net modelling. *Energy Conversion and Management*, 248. p. 114794. ISSN 0196-8904

<http://dx.doi.org/10.1016/j.enconman.2021.114794>

This is the Accepted Version of the final output.

UWL repository link: <https://repository.uwl.ac.uk/id/eprint/8304/>

Alternative formats: If you require this document in an alternative format, please contact: open.research@uwl.ac.uk

Copyright: Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy: If you believe that this document breaches copyright, please contact us at open.research@uwl.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.

Constructing a novel smart framework for supplying biogas energy in green buildings using an integration of response surface methodology, artificial intelligence and petri net modelling

Mohammad M. Shahsavar¹, Mehran Akrami², Mohammad Gheibi^{2,3}, Babak Kavianpour^{3,4}, Kourosh Behzadian⁵, Amir M. Fathollahi-Fard^{6*}

¹Department of Civil Engineering, Sajad University of Technology, Mashhad, Iran

² Department of Civil Engineering, Ferdowsi University of Mashhad, Mashhad, Iran

³ Zistpardazesharia Knowledge Based Company, Mashhad, Iran

⁴ Department of Chemical Engineering, School of Chemical and Petroleum Engineering, Shiraz University, Shiraz, Iran

⁵Department of Civil Engineering, University of West London, London, UK

⁶Department of Electrical Engineering, École de Technologie Supérieure, University of Québec, Montréal, Canada

Abstract

Nowadays energy crisis is considered an essential active issue for future urbanization in megacities. While the rate of population growth increases, the volume of municipal solid waste production increases significantly. This highlights the need of Sustainable Development Goals (SDGs) for both developed and developing countries. This paper introduces a novel smart framework for supplying biogas energy to study waste management and energy supply in green buildings. This framework integrates the Response Surface Methodology (RSM), Artificial Intelligence (AI), and Petri net modeling. Firstly, the particular biogas generation setup is invented for food waste digestion by integrating Sequencing Batch Reactors (SBR) sludge and Clostridial microorganisms. Before experimental practices, for evaluation of waste characterizations, the quartering and coning method is utilized. In the experimental practices, different variables including Sludge/Waste, Inoculum (Clostridiales/Waste), pH, Temperature and, time, are appraised in the lab-scale setup. Also, in the experimental section for measuring the variables through biogas production procedure, three protocols containing EPA-821-R-01-015, Organic Matter and alkalinity evaluation by American Public Health Association (APHA, 2017) and Einhorn Saccharometer technique are utilized. The optimum conditions are appraised based on Central Composition Design (CCD) using RSM. Artificial intelligence techniques including the Random Tree (RT), Random Forest (RF), Artificial Neural Network (ANN) and, Adaptive-

Network-based Fuzzy Inference System (ANFIS) are employed. Plus, for creating the optimum condition, a dynamic controlling system Petri Net modeling is used.

The outcomes of present investigation have illustrated that the optimum conditions for Sludge/food Waste (S/W), *Clostridiales*/ food Waste (C/W), pH, Temperature (T) and Retention time (t) as effective parameters are equal to 163 mg/g, 54 mg/g, 7, 30 °C and 55 days, respectively. Likewise, the analysis of variance (ANOVA) assessment demonstrated that the most effective parameters are S/W and T with high amount of F-value and low amount of P-value. Plus, between all machine learning methods, ANFIS with 0.99 correlation coefficient had the best accuracy for Accumulated Biogas Production (ABP) based on effective factors.

Sludge and Clostridial based bio-engine are compared with together asper biogas/methane generation and fluctuation of Total Organic Carbon (TOC), Chemical Oxygen Demand (COD) and total alkaline are appraised. The outcomes have demonstrated that efficiency of sludge-based system is two times more than Clostridial based reactors, because of available nutrient and active microorganisms. Finally, Circular Economy (CE) scrutinizing have proved that with application of this method in a green building, all electrical energy/heat demands can be supplied by 381 kwh (3051 MJ) in the case study (In one residential unit). Also, the remained digested food waste with 310 mg/L COD is valuable for gardening activities in green buildings.

Finally, with the outcomes of present study, some different scientific issues such as clean energy supplying in green buildings, smart sustainable biogas production control system, Integrated Solid Waste Management (ISWM), CE and SDGs in green buildings are tackled as a novel framework in smart and sustainable cities.

Keywords: Biogas, Food Waste, Sludge, Clostridial Microorganisms, Response Surface Methodology, Artificial Intelligence, Petri Net Modelling;

1. Introduction

One of the main concerns in Green Building Concepts (GBC) [1], Sustainable Development Goals (SDGs) [2] and Clean Technologies Theory (CTT) [3] is related to stable energy supplying in short, middle and long terms [4]. When energy demand is increased in different megacities of developing countries based on population accumulation [5], consumerism [6], cultural diversion [7] and global warming effects [8] which is continued every year. Plus, waste generation, especially biological wastes in developing countries, is augmented as per life style changing [9] and developing urbanization in some countries such as Iran [10], India [11] and China [12]. Energy crisis and biological waste generation problem are noteworthy challenges when they are seen separately, but, in a holistic view of GBC, they can be considered as an opportunity for biogas production for implementation of CTT in future lifestyle of developing countries [13].

Biogas generation from biological wastes is assumed as a green method for Integrated Solid Waste Management (ISWM) during anaerobic digestion in household reactors [14, 15]. The scheme of

Circular Economy (CE) in biogas generation from biological waste and biochemical reaction are illustrated in Figs. 1 [16-18] and 2 [19-21], respectively. According to Fig. 1, with CE approach the threats of waste generation can be converted to opportunities for energy demand crisis and fertilizer providing in green building's plants from digested wastes [22]. Whereas, as per Fig. 2, it is clear that biogas generation is done in four stages containing hydrolysis, acidogenesis, acetogenesis, and methanogenesis [23].

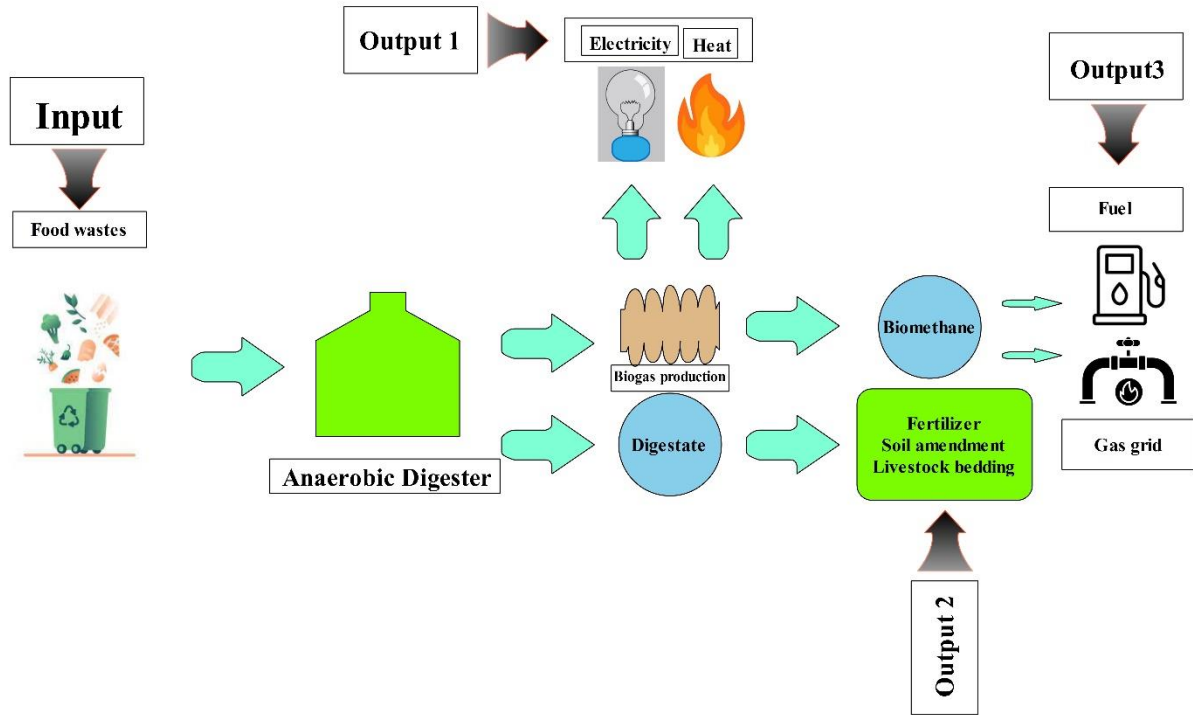


Fig. 1. The schematic plan of biogas generation cycle [16-18].

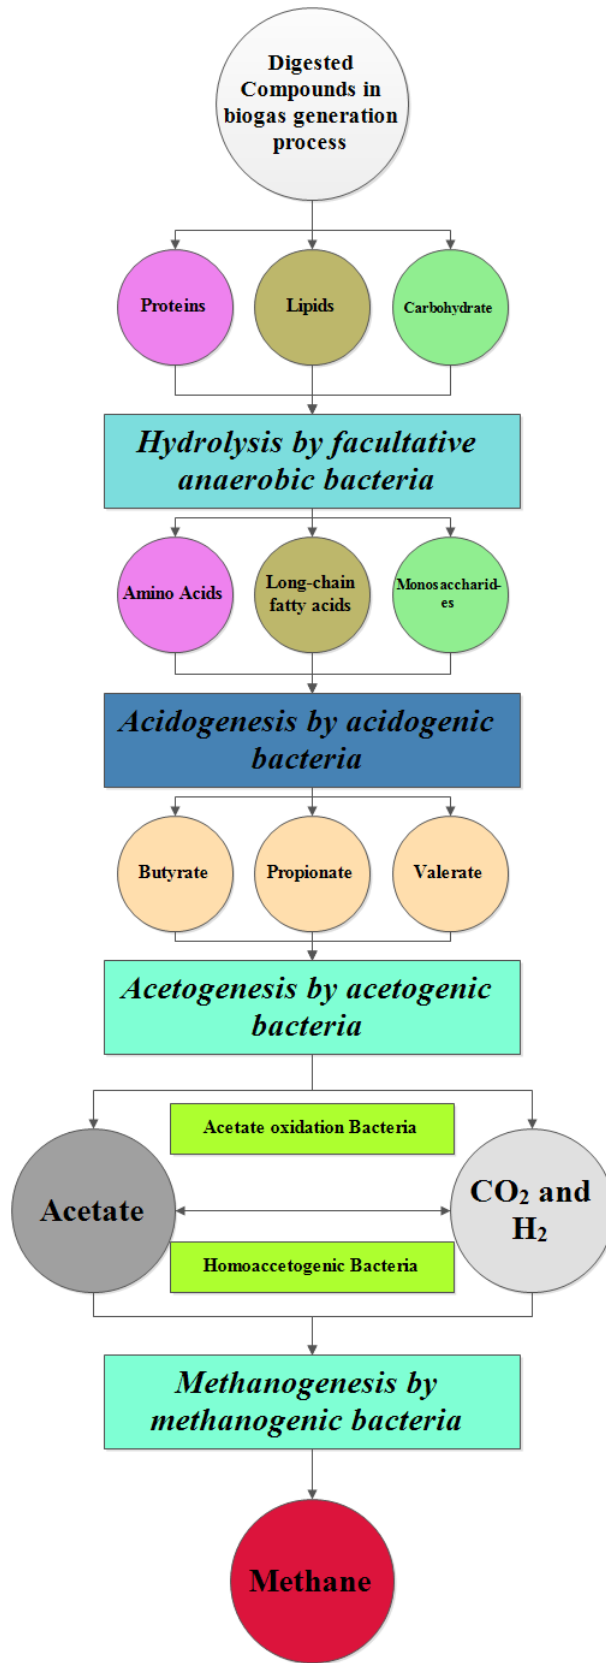


Fig. 2. The schematic plan of biochemical reactions [19-21].

80

81 Cavaignac et al. (2021) have presented a novel concept for operation of biogas reactors with
82 considering technical, economic and environmental aspects. In the mentioned study, main issue
83 was related to amine scrubbing role in biogas generation enhancing. Plus, by application of Life
84 Cycle Assessment (LCA) method, emission of CO₂ was predicted with high accuracy [24]. Also,
85 Miranda et al. (2021) have evaluated green technologies for energy supplying in some countries
86 including Brazil, Russia, India, China, and South Africa (BRICS). For the mentioned goal,
87 Methodi Ordinatio methodology with concentration on sustainability indices was used [25]. Plus,
88 Niu et al. (2021) have designed a biogas system for rural usages energy providing in China. In this
89 study, environmental and social benefits have been scrutinized by monetization method. Likewise,
90 the performance of partially competitive strategy is discussed for medium- and large-scale biogas
91 projects (MLBPs) [26]. Abanades et al. (2021) have presented a framework for biogas generation
92 in the globe based on critical review concept [27]. Lomazov et al. (2021) have optimized biogas
93 energy production plants with application of fuzzy and genetic algorithm techniques [28]. Stürmer
94 et al. (2021) have compared the biogas production based on agricultural wastes in different regions.
95 The declared research has assessed legal framework and regional structures on biogas production
96 [29]. Jung et al. (2021) and Akbulut et al. (2021) have designed local biogas system in large-scale
97 with considering syngas system energy supplying and energy planning in Malatya, respectively
98 [30, 31]. Brémond et al. (2021) have presented a novel framework for improvements of solid
99 digestion process in Continuously Stirred Tank Reactors (CSTRs) with agricultural waste feeding.
100 In the declared study, some different strategies are assessed for enhancing the efficiency of biogas
101 production [32]. Naquash et al. (2021) have presented some outcomes for production of Liquefied
102 Natural Gas through solidification of CO₂ through biogas procedure. Likewise, in the mentioned
103 investigation, all simulations are done in Aspen Hysys® v11 platform [33]. Moreover, Zhang et
104 al. (2021) have designed food-waste-to-energy system as decentralized energy supplying
105 approach. The researchers have concentrated on organic matter loading and temperature effects on
106 biogas production efficiency. Also, with application of Sankey diagram in energy flow, the
107 performance of anaerobic digestion and Combined Heat and Power (CHP) are scrutinized [34].
108 Wu et al. (2021) have scheduled the biogas-solar-wind as Integrated Energy Systems (IESs) in a
109 case study. In the mentioned study, for programming energy usages multi-objective optimization
110 (MOO) are utilized [35]. Su et al. (2021) have presented a novel system for thermal collecting of
111 bio-methane production with application of photovoltaic facilities. In the avowed research,
112 reducing the fossil fuel consumption are proposed as cost function [36].

113 As the reviewed investigations, application of Artificial Intelligence (AI) and Response Surface
114 Methodology (RSM) for biogas generation in green building energy supplying is so rare as a
115 research gap and this research wants to present a novel smart model for bio-energy contributing.

116 The present study aims to:

- Inventing biogas setup for household energy applications based on biological wastes in green buildings with combination of *Clostridiales*, wastewater treatment plant's sludge and food wastes digesting activities.
- Optimizing the effective parameters on biogas production in green buildings by Central Composition Design (CCD)-RSM technique.
- Creating smart controlling model for operating system by Random Tree (RT), Random Forest (RF), Artificial Neural Network (ANN) and Adaptive-Network-based Fuzzy Inference System (ANFIS) soft computations.
- Presenting controlling model in green buildings as per Petri net system.

In the present study, with application of CCD-RSM technique, the optimum conditions are determined and likewise, the number of experimental runs are reduced. On the other words, by CCD-RSM method plus enhancing the performance of biogas production process, the experimental costs are decreased. In the followings, the AI computations evaluate the behavior of bio-system performance for controlling possible reactor's problems in the especial situations with prediction the future manners. Finally, with comparison of the outcomes of AI and CCD-RSM, the effective method for controlling and prediction of biogas production are suggested as the scientific fact.

The rest of this paper is organized as follows: Section 2 provides the materials and methods including the framework of this research, used materials, instrumentation, lab-scale setup, microbiological methods, optimization, prediction and controlling models. Section 3 presents the test results and provides the discussion on the results. Finally, a summary of this research with findings and recommendations, is concluded in Section 4.

2. Materials and methods

2.1. Case study

The present research is done in a residential complex with fifteen household units which is illustrated as per Fig. 3. Also, monthly electrical demand (Fig. 4) of each unit is demonstrated in Fig. 4 according to PVSystem simulations software [37]. Plus, approximate analysis of food wastes which is appraised based on quartering and coning method [38] is summarized in Table 1.

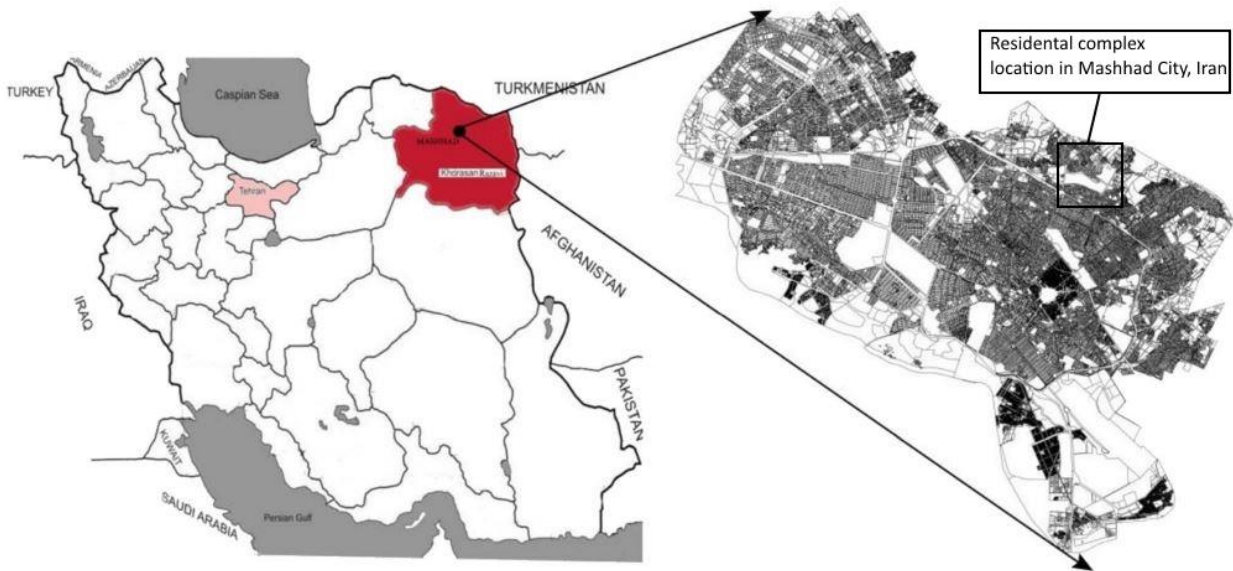


Fig. 3. Location of Mashhad, Iran.

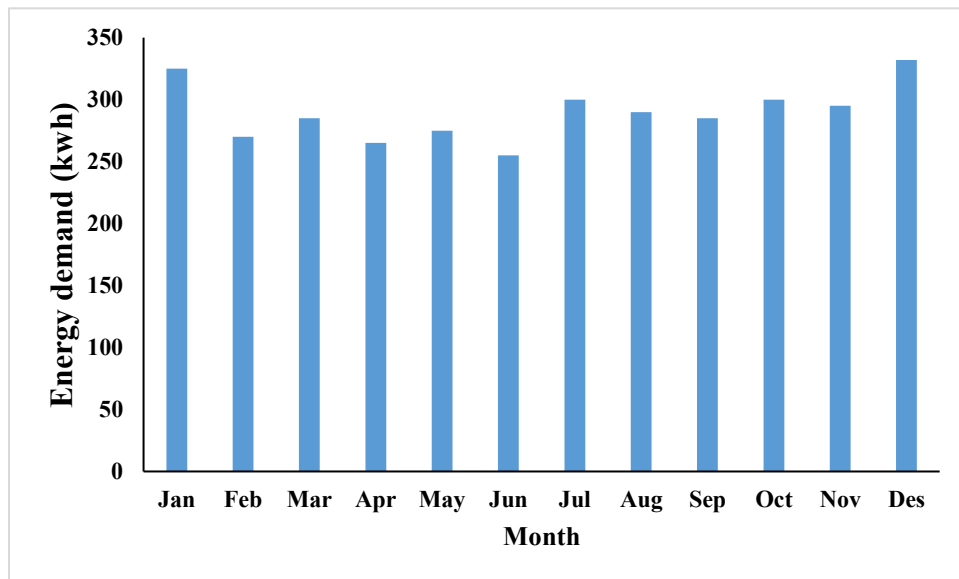


Fig. 4. The pattern of electrical energy consumption in the case study in Mashhad, Iran.

Table 1. Approximate specification of residential wastes as per quartering and coning method in present research.

Waste type	Percentage	Moisture (%)
Paper	21	8
Glass	9	2
Food waste	40	82
Plastic waste	27	12
Cloth waste	3	15

2.2. Research roadmap

In this study, research roadmap is divided to four sections such as experimental efforts, optimization and statistical evaluations, predictive models and controlling algorithm as a Decision Support System (DSS) which are demonstrated in Fig. 5.

According to Fig. 5, in the first step, the energy demands of the case study is computed by simulation and application of some different data banks. By applying this section, the value of energy demand is determined in different months. Then, with quartering and coning method, the quality and quantity of available solid wastes are measured as the first section of second stage. Plus, in the second section the lab scale setup is designed and built and then in the last section of this stage, the experimental efforts are started. For design of experiments, CCD-RSM method is employed as sensitive analysis, optimization and regression prediction equations. After, optimizing the mentioned experiments by CCD-RSM, the suggested optimum conditions are compared by real test's amounts until reaching to desirable precision. If the CCD-RSM values are not fit to real experiments, the CCD-RSM should be redesigned. In the next stage, by the CCD-RSM outcomes, Petri Net modelling are done for creating the concept of smart operation system of biogas generation process with focusing on approved optimum conditions. In the fifth stage of present research, the RF, RT, ANN and ANFIS computations are utilized for smart forecasting microorganism's behavior through the biogas production procedure. Finally, after assessment of biogas energy supplying performance in this study, a conceptual model is designed for implementation of SDGs. CE and ISWM in the research.

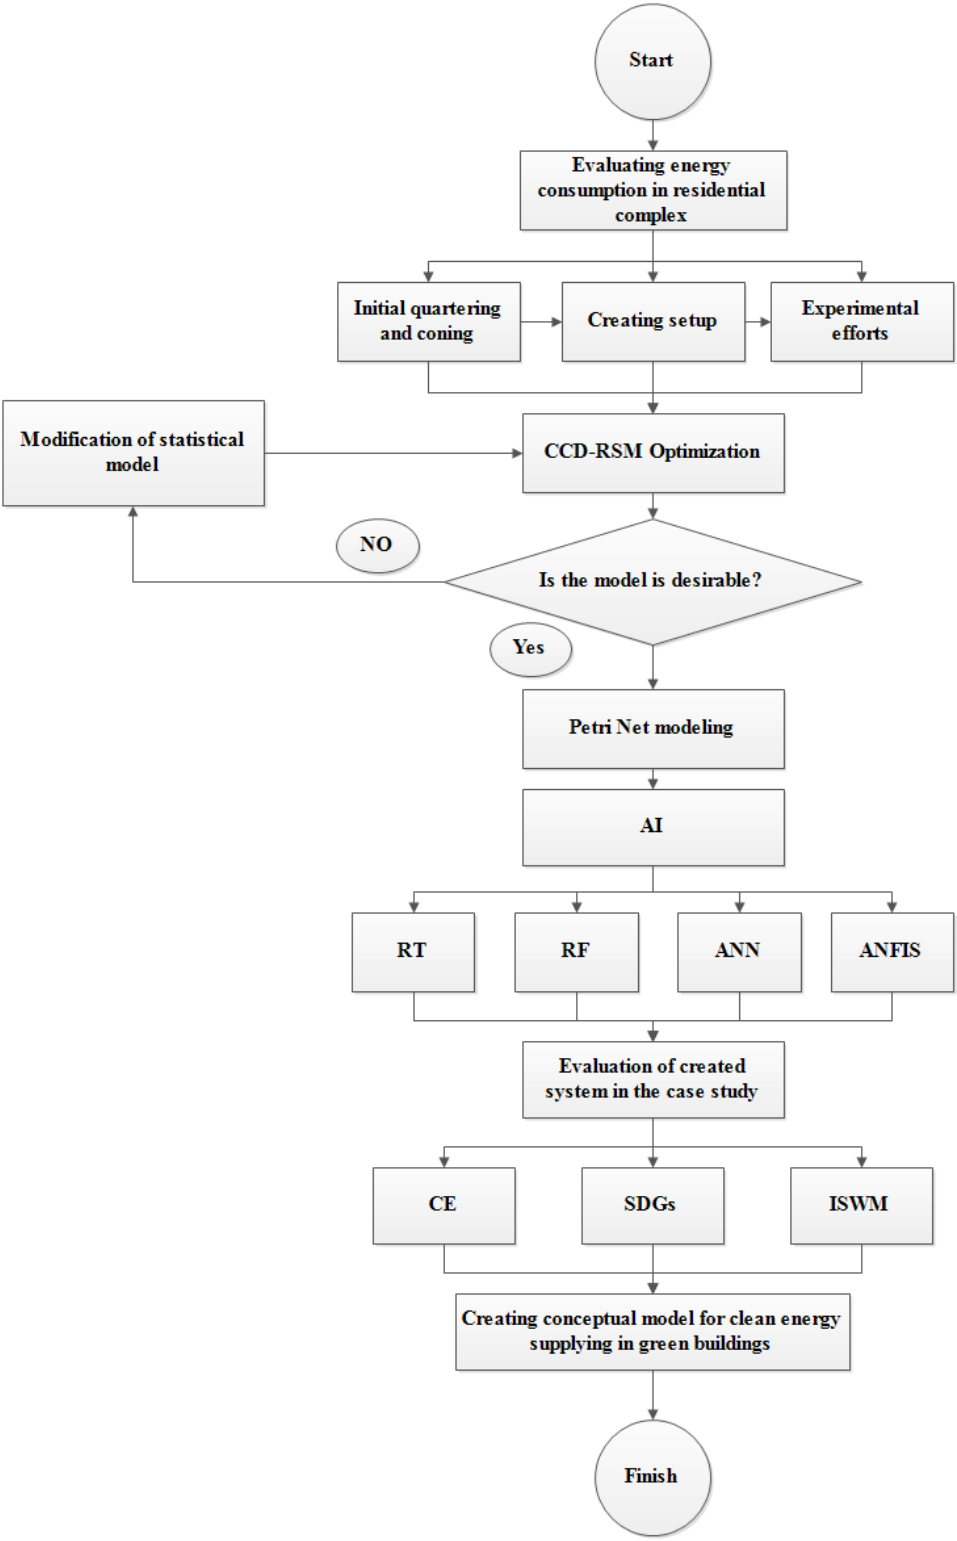


Fig. 5. The research roadmap of present study (CCD-RSM: Central Composition Design-Response Surface Methodology, AI: Artificial Intelligence, RT: Random Tree, RF: Random Forest, ANN: Artificial Neural Network

and ANFIS: Adaptive-Network-based Fuzzy Inference System, CE: Circular Economy, SDGs: Sustainable Development Goals and ISWM: Integrated Solid Waste Management)

2.3. Materials and instrumentation

All reagents and materials for experimental practices and sampling are shown in Table 2. Likewise, sampling is done three times with quartering and coning method, initial and final gas generation tests. Whereas, all applied instruments are utilized for sampling, gas measurement and effective parameters determinations are mentioned in Table 3.

Table 2. Crucial materials and regents for present study.

Compounds	Conditions	Company
NaOH	Molecular weight is equal to 40 gr mol ⁻¹	Sigma Aldrich, USA
Secondary sludge sedimentation as an inoculum	This sludge have been provided from secondary clarifier tank in Sequencing Batch Reactor (SBR)	From Al-Teymour wastewater treatment plant in Mashhad City
Silicone glue	Silicon, nanopowder, <100 nm particle size (TEM), ≥98% trace metals basis with 28.09 gr mol ⁻¹ molecular weight	Sigma Aldrich, USA
N ₂ gas	Nitrogen, ≥ 99.998% with 28.01 gr mol ⁻¹ molecular weight	Sigma Aldrich, USA

Table 3. Functional equipment in present study.

HNO ₃	70% purity and with 63.01 gr mol ⁻¹ molecular weight	Sigma Aldrich, USA
Mixed food waste	It is obtained after one day	From Case study in Mashhad City
Clostridiales	Liquid sample	Iranian Genetic Bank (IGB)
Instrument	Conditions/model/description	Company
Vacuum flask	With glass hose connector	VWR® International Co.
Vacuum pump	Suction Capacity 550 to 15000 m ³ h ⁻¹	PPI pumps Co.
Lab scale storage	Borosilicate Glass	BOROSIL Technologies Co.
One-liter glass batch-mode digester	High pressure and temperature mode	Nunc Lab-Tek Co.
pH meter	Thin. Professional.	Hanna pH meter Co.
Total Organic Carbon meter	multi EA® 5100 for Micro- Elemental Analysis	Analytik Jena Co.
Autoclave	Vertical floor-standing autoclaves (top-loading) from 40 to 150 liters chamber volume	Systec. V-Series Co.
Bain-marie	Stainless Steel Bain Marie (Brand:SSFV), 220V	Mindiamart Co.

Oven	Drying oven 125 basic dry (5 - 250 centigrade degree)	IKA Co.
Electrical control circuit	Micro Pragma	Schneider Electric Co.
Chemical Oxygen Demand meter	Fits 16mm or 13mm Hach COD vials, Test N Tube vials or TNTplus™ vials	Hach Co.
Submersible pump	SKU: ECO-185	Lab society Co.
Temperature sensor	Sensor Net Connect Temperature Monitoring	Plug & Track Co.
Pneumatic connections	UNIFLEX™ BASIC model	BROEN-LAB Co.
Electro thermal elements	Steel with 403 grade and temperature threshold is equal to 400 °C	Iran element Co.
Gas storage bag	High pressure and temperature mode	Nunc Lab-Tek Co.
Heat water tank	High pressure and temperature mode	Nunc Lab-Tek Co.
Einhorn's saccharometer	The carbon dioxide created in the fermenting process would rise to the top of the closed tube and force the level of liquid down.	VWR Co.
20 cc syringe	Standard plastic mode	Samen Co.

193

194 **2.4.Lab-scale setup and experimental methodology**

The schematic plan of biogas lab scale setup including mechanical devices, chemical sensors and equipment and structural tools are depicted in Fig. 6. Also, the algorithm of experimental methods in each run is illustrated in Fig. 7.

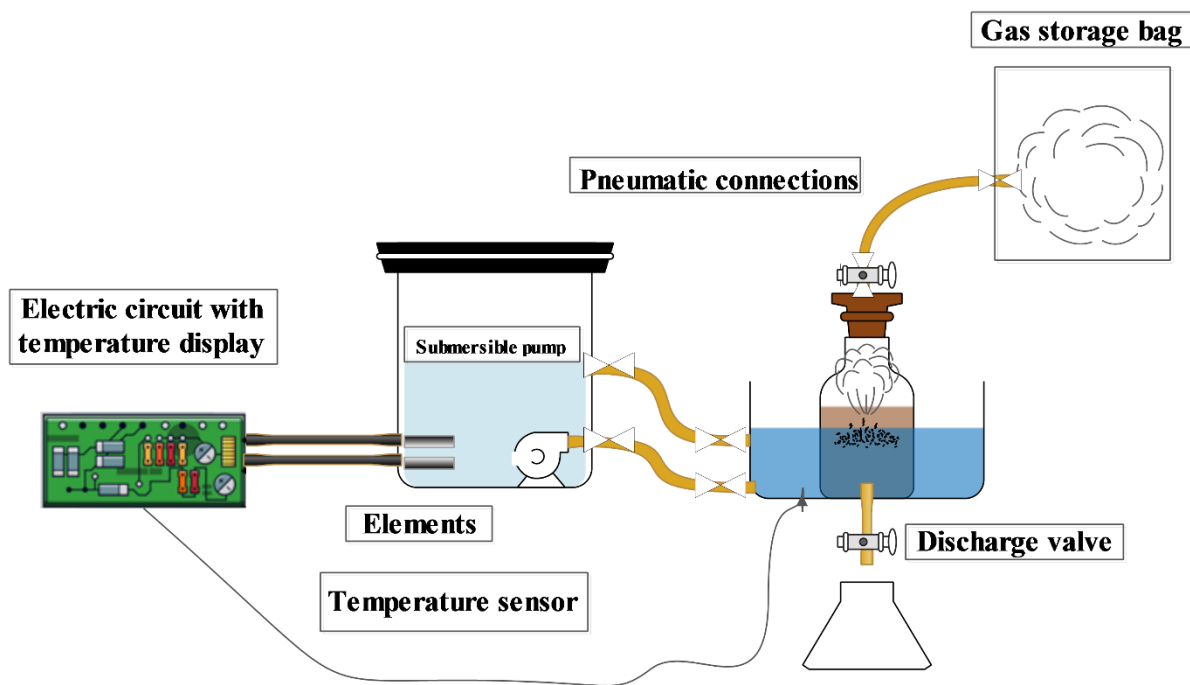


Fig. 6. Schematic plan of bio-energy reactor in present study.

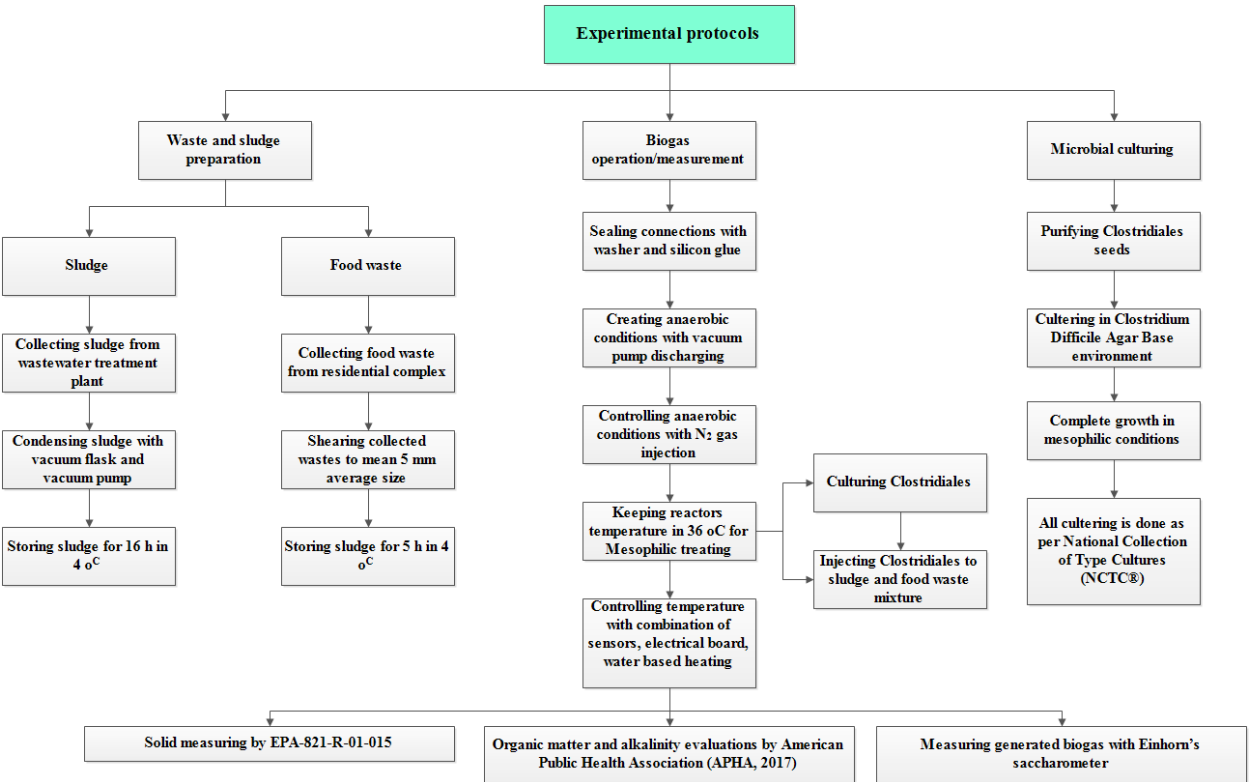


Fig. 7. The algorithm of experimental methods in present study [39-41].

2.5.CCD-RSM model

In this study, CCD-RSM statistical model is used in Design Expert 7.0.0 software which it determines sensitive analysis, optimum conditions and mathematical regression based predictive model for energy supplying in green buildings. Also, in the Design of Experiments (DOE), value of alpha is set in 1.2 amount [42]. The specifications of DOE for each effective parameter in this study is demonstrated in Table 4. In this research Accumulated Biogas (methane) Production (ABP) is assumed as a cost function (response) in ml unit. Both sludge and Inoculum play role as bio-engine for degradation of food waste in biogas generation cycle. But, in present investigation, the character of each one is separated for comparison of wastewater treatment plant's bacteria and *Clostridiales* gas generation abilities. The key parameters for experimentation are selected as per literature review evaluations in different investigations [29-31, 39-41].

Table 4. The variables and values used for biogas process optimization in CCD.

Variables	Unit	Symbol	Coded factors level				
			-1.2 (Low)	+1	0	-1	1.2 (High)
Sludge/Waste	mg/gr	S/W	90	100	150	200	210
Inoculum (Clostridiales/Waste)	mg/gr	C/W	6	10	30	50	54
pH	_____	pH	5.2	6	7	8	8.2
Temperature	°C	T	6.5	25	35	45	48.5
Time	day	t	6	10	30	50	54

After determination of optimum conditions, for creating smart controlling models Petri Net [43] concept is utilized. In the declared model, each adjustable factor and conditional values are put in place and transition functions, correspondingly. The algorithm of Petri Net modelling design is shown in Fig. 8.

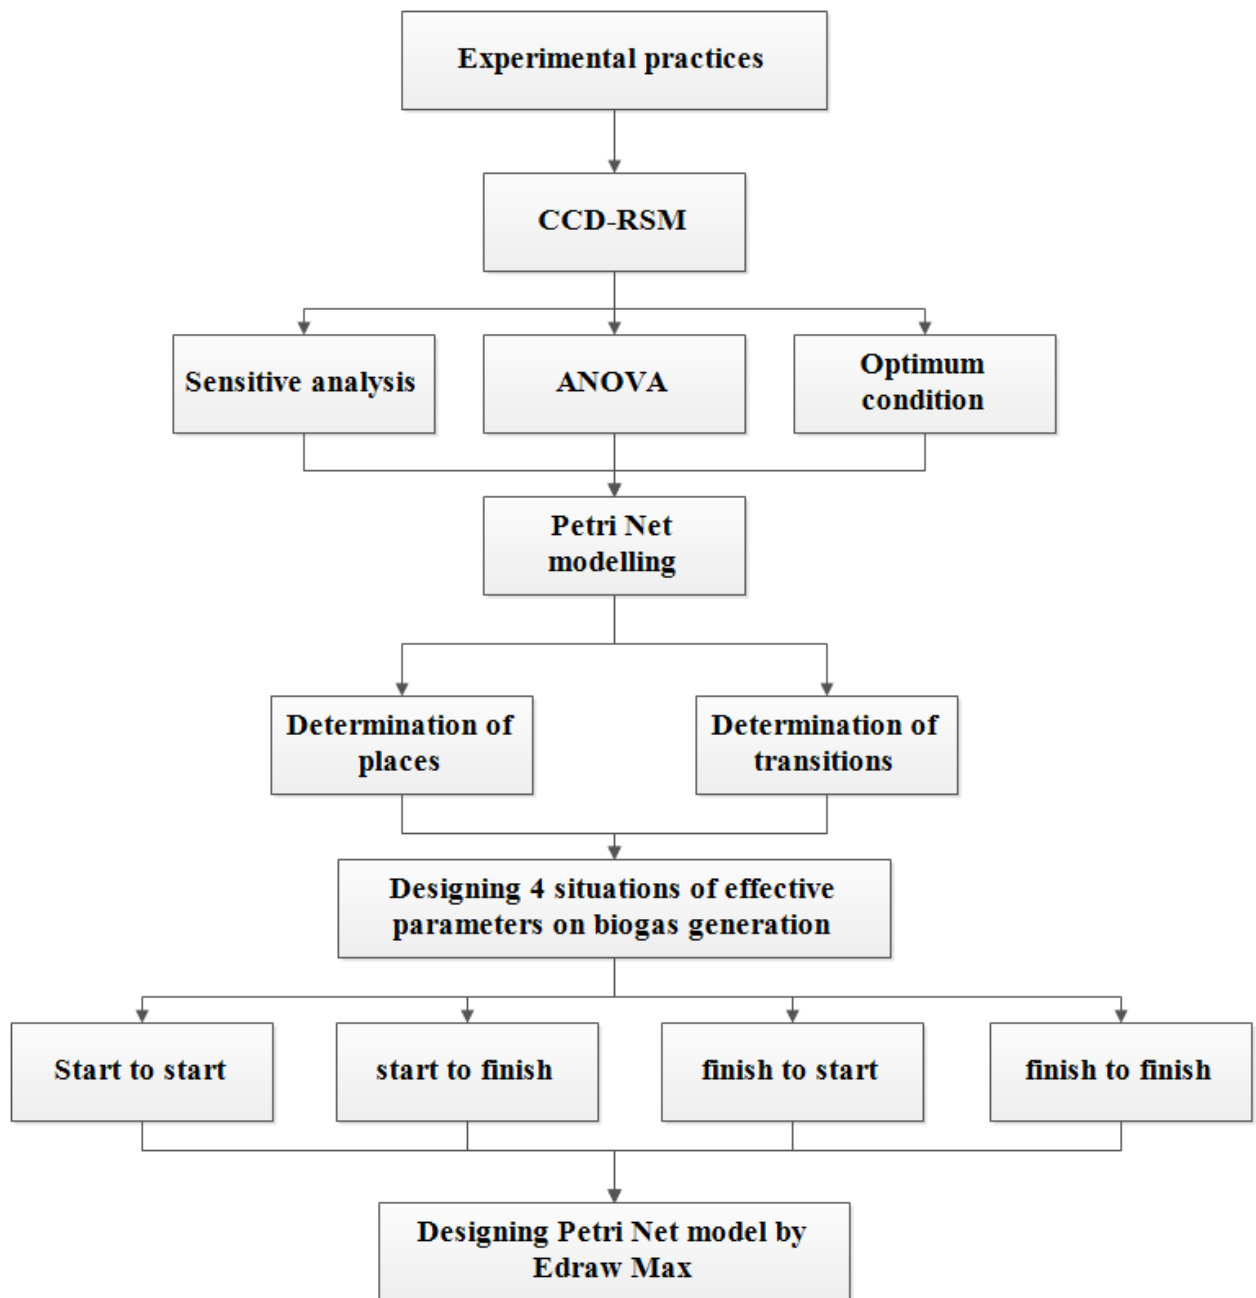


Fig. 8. Schematic plan of Petri Net modelling in present study.

2.6.AI techniques

In the present study, for creating the predictive model as smart controlling systems, some different machine learning computations such as ANN [44], ANFIS [45], RT [46] and RF [47] are used. For implementation of the mentioned algorithm MATLAB 2013 b and WEKA software are performed which is described in Table 5.

227 Table 5. The AI computation specifications in present research.

Method	Software	Conditions
ANN	WEKA 3.9	Multilayer perceptron and percentage split is set on 90%
RT	WEKA 3.9	Cross-validation folds are set on 30
RF	WEKA 3.9 and MATLAB 2018b®	Percentage split is set on 80%
ANFIS	MATLAB 2018b®	Sugeno, membership functions are three Gaussian type 2, optim method and number of epochs are selected equal to hybrid and 70, correspondingly.

228

229 **3. Results and discussions**

230 **3.1.Optimization and experiments**

231 The outcomes of experimental efforts as per analysis based on CCD-RSM technique are
232 summarized in Table S.1. Plus, the fitness of Linear, 2FI, Quadratic and Cubic distributions have
233 illustrated that the R-Squared and Predicted R-Squared of quadratic function is more acceptable in
234 comparison of other ones (Table 6). According to Table 6, quadratic model with 0.92 and 0.64 R-
235 Squared and Predicted R-Squared can achieve the best outcomes in curve fitting aspect (Equation
236 1). In mathematical viewpoint, quadratic model could satisfy ABP (ml) according to effective
237 parameters containing S/W, C/W, pH, T and t. But, for prediction ABP, the created statistical
238 model with 0.62 Predicted R-Squared cannot meet forecasting expectations. Thus, for estimations
239 of ABP, application of AI can be useful as an online soft monitoring system in detail of DSS.

240 Table 6. The results of mathematical models in CCD-RSM.

Source	Std. Dev.	R- Squared	Adjusted R- Squared	Predicted R- Squared	PRESS	
Linear	1518.185	0.20	0.119179	0.0187	1.26E+08	
2FI	1647.652	0.28	-0.03745	0.18523	1.96E+08	
Quadratic	1125.946	0.92	0.515523	0.64	1.26E+08	Suggested
Cubic	867.7422	0.91	0.712247	-0.79628	2.3E+08	Aliased


$$\begin{aligned}
 \text{ABP} = & -46061.41463 + 126.90239 * S/W + 85.91509 * C/W + 9832.81639 * pH + 237.44436 * T - \\
 & 4.22495 * t - 0.034750 * S/W * C/W - 3.26625 * S/W * pH + 0.026214 * S/W * T - 0.10325 * S/W * \\
 & t - 12.65625 * C/W * pH - 0.23429 * C/W * T + 1.04234 * C/W * t - 0.81786 * pH * T - 1.35625 * pH \\
 & * t + 0.035000 * T * t - 0.29929 * (S/W)^2 - 0.10317 * (C/W)^2 - 612.44931 * (pH)^2 - 3.62682 * (T)^2 + 0.12339 \\
 & * (t)^2
 \end{aligned}$$

The outputs of analysis of variance (ANOVA) evaluations and sensitive analysis is demonstrated in Table 7 and Fig. 9, respectively. With considering to Table 7, The P-value of model and its lack of fit are computed equal to less than 0.0001 (significant) and 0.1415 (not significant) respectively, which it conveys high level of validity in achieved statistical model. Also, according to Table 7, the P-Value of both S/W and T factors are less than 0.0001. Therefore, S/W and T have the most significant effect on ABP in comparison other ones. Likewise, the F-value of S/W with 89.73 amount is more than T parameter (with 11.09) and it determines that S/W is the most important parameter between all effective factors on ABP. Whereas, the least significant parameter is related to t with 0.28 and 1.19 P-value and F-value correspondingly. The sensitive analysis of dual effective parameters vs ABP is illustrated in Fig. 9. As per this Fig., the most slope variations are related to S/W and T factors which illustrate the influences of them on ABP in comparison of other ones.


Table 7. The results of ANOVA evaluation in CCD-RSM.

Source	Sum of Squares	df	Mean Square	F Value	p-value (Prob > F)	
Model	91455700	20	4572785	3.60	< 0.0001	significant
A-S/W	10235044	1	10235044	89.73	< 0.0001	
B-C/W	1611124	1	1611124	1.27	0.26	
C-pH	3700598	1	3700598	2.91	0.09	
D-T	9741058	1	9741058	11.09	< 0.0001	
E-t	1517780	1	1517780	1.19	0.28	
AB	38642	1	38642	0.03	0.86	
AC	853471.1	1	853471.1	0.67	0.41	
AD	16836.13	1	16836.13	0.01	0.90	
AE	341138	1	341138	0.27	0.60	
BC	2050313	1	2050313	1.61	0.21	
BD	215168	1	215168	0.17	0.68	
BE	5562780	1	5562780	4.38	0.04	
CD	6555.125	1	6555.125	0.005	0.94	


CE	23544.5	1	23544.5	0.018	0.89	
DE	4802	1	4802	0.003	0.95	
A^2	2832988	1	2832988	2.23	0.14	
B^2	8618.599	1	8618.599	0.006	0.93	
C^2	1898166	1	1898166	1.49	0.23	
D^2	6243064	1	6243064	4.92	0.03	
E^2	12327.59	1	12327.59	0.009	0.92	
Residual	36764876	29	1267754			
Lack of Fit	32146334	22	1461197	2.21	0.14	not significant
Pure Error	4618542	7	659791.6			
Cor Total	1.28E+08	49				

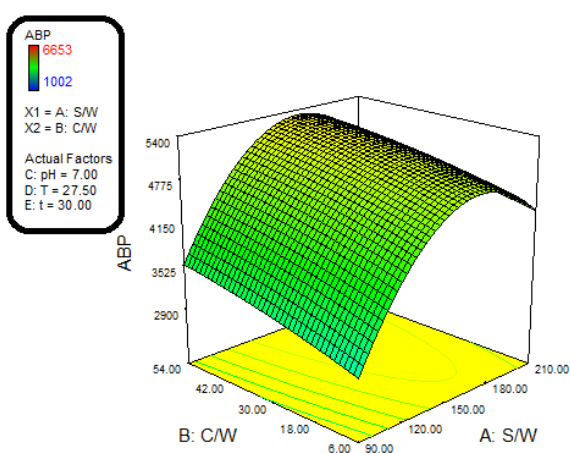


(a)

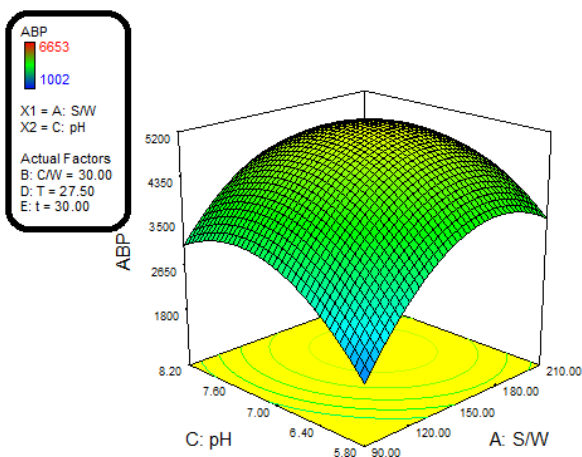


(b)

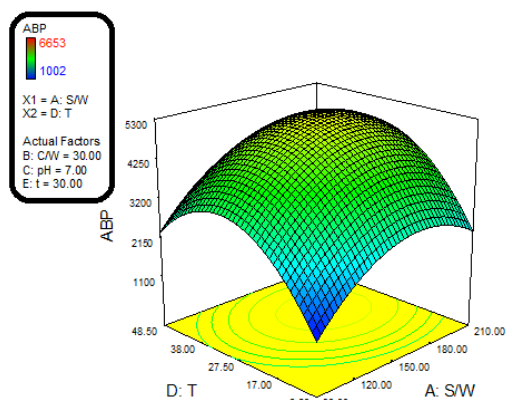


(c)

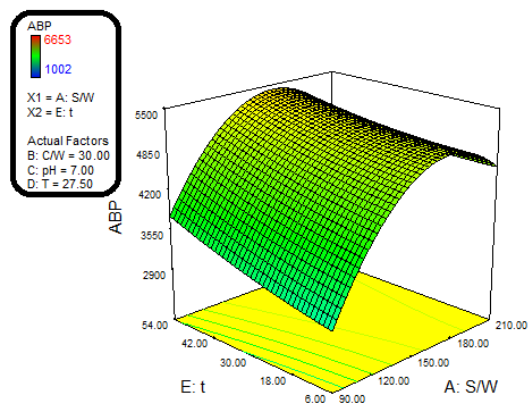


(d)

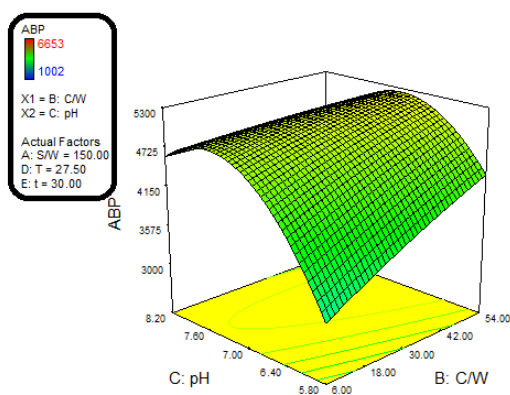


(e)

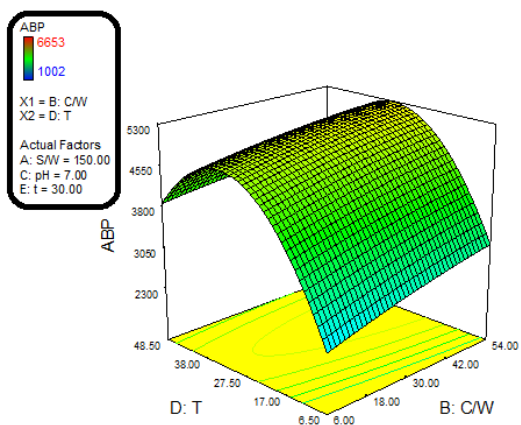



(f)

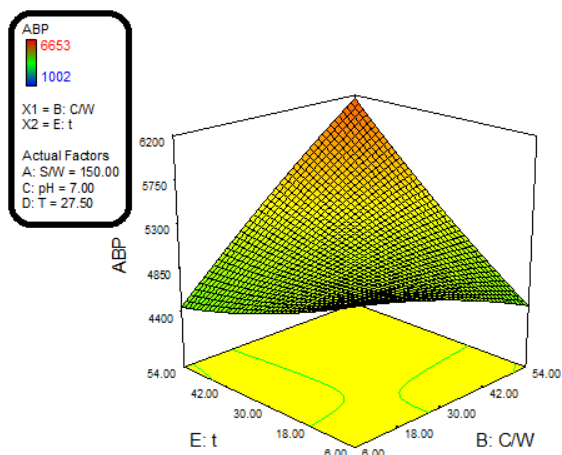

(g)

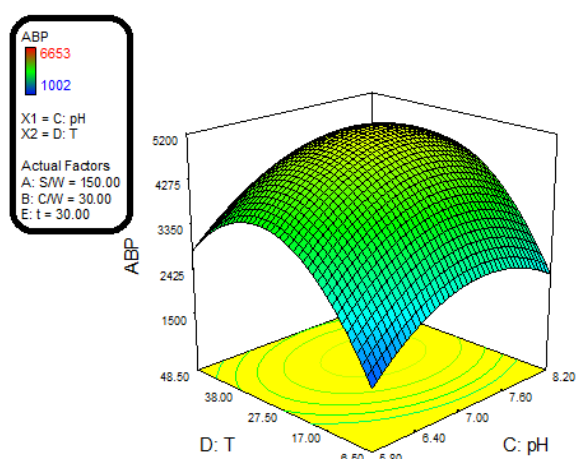

(h)

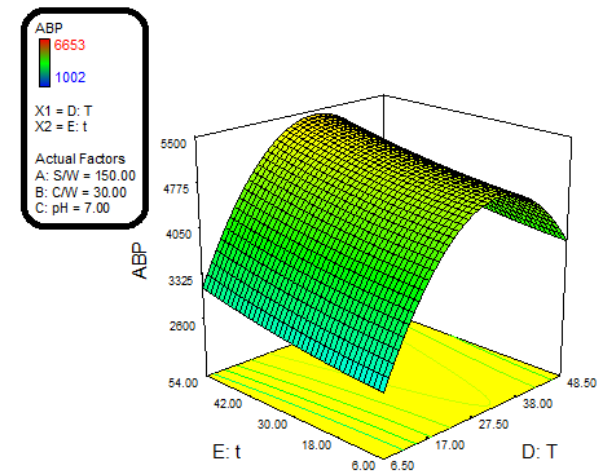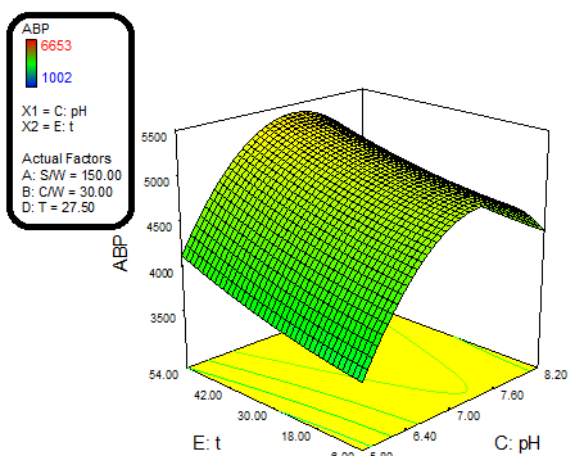

266
267
268
269

270
271

272

(I)

(J)

Fig. 9. The sensitive analysis of effective parameters in CCD-RSM.

The normal plot of residuals is demonstrated in Fig. S.1 which shows distribution of ABP's results in neighborhood of normal diagram. So, the results of experimental activities follow normal statistical distributions in different runs. The five suggested optimum conditions based on CCD-RSM computations are summarized in Table 8. According to declared Table, optimum values of S/W, C/W, pH, T and t are equal to 163 mg/g, 54 mg/g, 7, 30 °C and 55 days, respectively. Also, the mentioned suggestions are examined in lab scale setup with three repetitions and 6310.2 ml, 6282.3 ml and 6325.1 are measured as experimental outputs. While, the mean value of predicted ABP with 6259.96 ml has 99.6% accuracy with mean value of experimental results (with 6306.1 ml). Desirability of mathematical prediction outcomes vs variations of S/W and C/W is illustrated in Fig. S.2.

Table 8. The outcomes of optimum conditions in CCD-RSM.

Number	S/W	C/W	pH	T	t	Predicted ABP (ml)	Experimental outcomes repetition 1- ABP (ml)	Experimental outcomes repetition 2- ABP (ml)	Experimental outcomes repetition 3- ABP (ml)
1	163.1	54	6.97	31.02	55	6261.1			
2	163.69	54	6.98	30.88	52	6260.3			
3	161.76	54	6.99	31	54	6260.2	6310.2	6282.6	6325.5
4	161.45	54	6.93	30.73	51	6259.8			
5	163.08	54	6.92	30.33	53	6258.4			

3.2.Smart control systems


In the followings, experimental outcomes modeled by ANN, RF and RT machine learning algorithms which is shown in Table 9. As per the mentioned soft computing systems, the most accuracy with 0.93 correlation coefficient is related to RT algorithm. Plus, ANN and RF algorithms are in the next places with 0.91 and 0.87 correlation coefficients, respectively. Also, plot matrix of input and output data is demonstrated in Fig. S.3. The computational RT algorithm and RT conceptual model are demonstrated in Equation S.1 and Fig. 10, respectively. With following this tree, ABP of each fabulous condition can be predicted as a soft sensor.

Table 9. The statistical outcomes of ANN, RF and RT algorithms in present research.

Statistical parameters	ANN	RF	RT
Correlation coefficient	0.91	0.87	0.93

Mean absolute error	890.97	1070.74	755.6
Root mean squared error	952.41	1207.11	870.98
Relative absolute error	51.58%	58.21%	43.74%
Root relative squared error	49.94%	61.23%	45.67%
Total number of instances	5	10	5

296

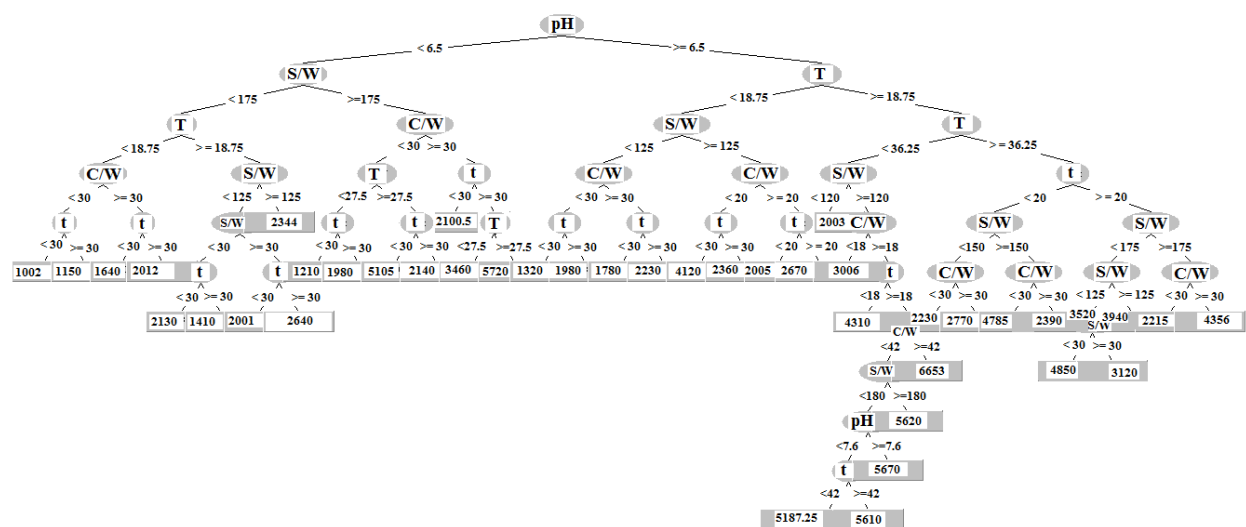

297

298

Fig. 10. The RT conceptual model in present study.

299

300

301

302

303

304

The confusion matrix and parallel coordinates plot of RF algorithm are illustrated in Fig. 11 and S.4, correspondingly. According to Fig. 11, the population of positive predictive value is more than negative predictive value which demonstrates validity of RF computations in this research. Also, the parallel coordinates plot depicts the high level of correct predictions for ABP values as per effective parameters. With focusing on Fig. S.4, staccato lines (as an incorrect prediction) cannot be seen in comparison of allied lines (as a correct estimation).

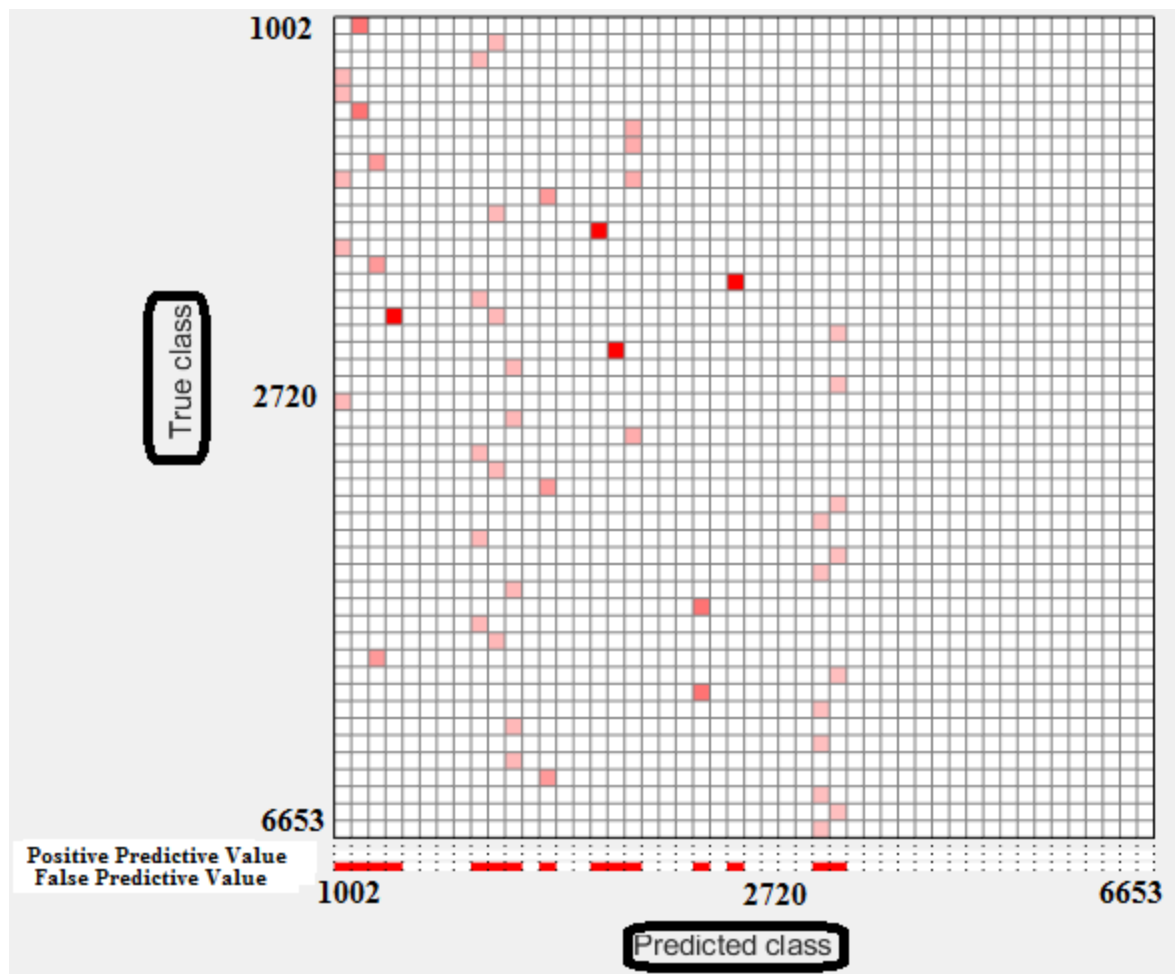


Fig. 11. The confusion matrix of RF algorithm in present study.

Structural of ANFIS model for smart estimation of ABP as per S/W, C/W, pH, T and t with 3 membership functions is depicted in Fig. 12. Also, adaption of training data and FIS outputs is declared in Figs. S.5-6 and Table 10 which accent to high level of accuracy in ANFIS computations. Likewise, duo to evaluation of significant degree in each effective parameter for ABP the dual sensitive analysis of ANFIS calculation algorithm is demonstrated in Fig. 13. With regard to Fig.13, it is clear that S/W and T parameters have the most slope variations on the 3D plots and this indicates the high degree of importance of these factors in comparison of other parameters.


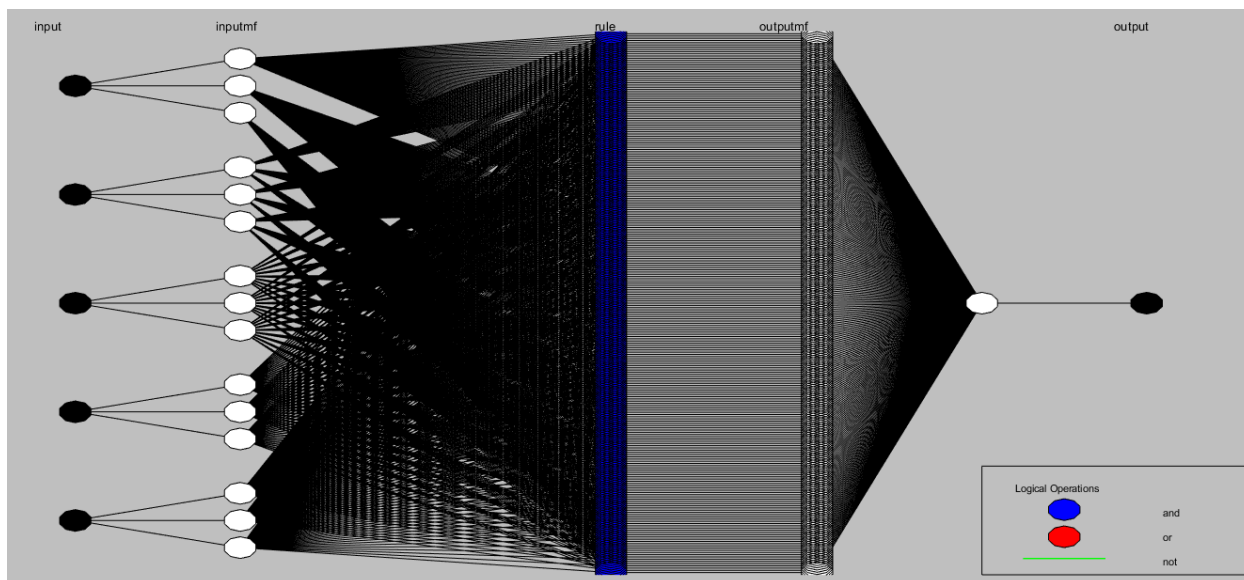



Fig. 12. Structural ANFIS computational algorithm in present study.

Table 10. The statistical outcomes of ANFIS algorithm in present research.

Regression Statistics	
Multiple R	0.981825
R Square	0.96398
Adjusted R Square	0.963229
Standard Error	310.1929
Observations	50

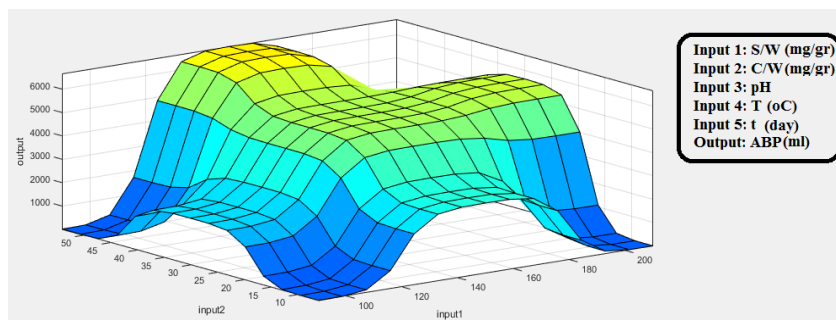


(a)

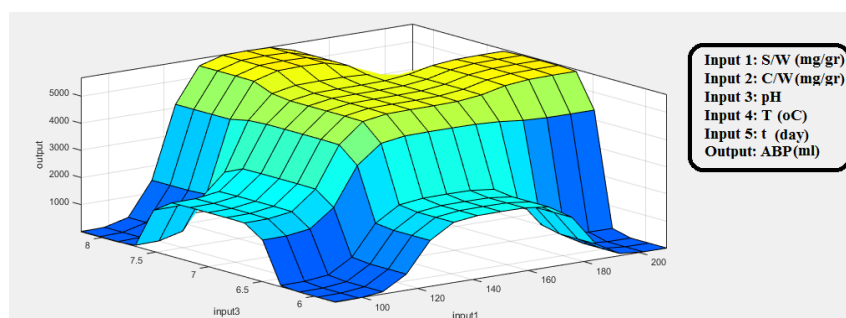

322


(b)

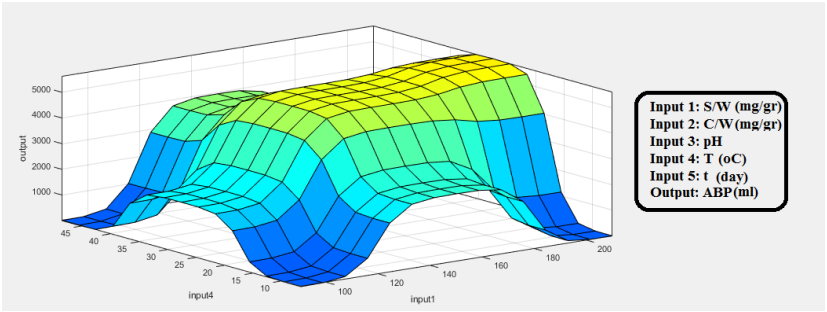

323

324


(c)

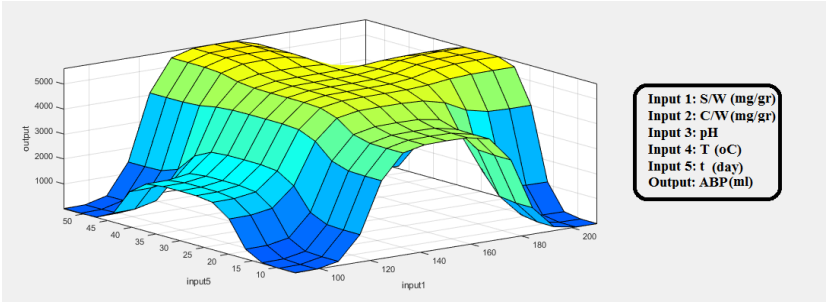

325

326


(d)

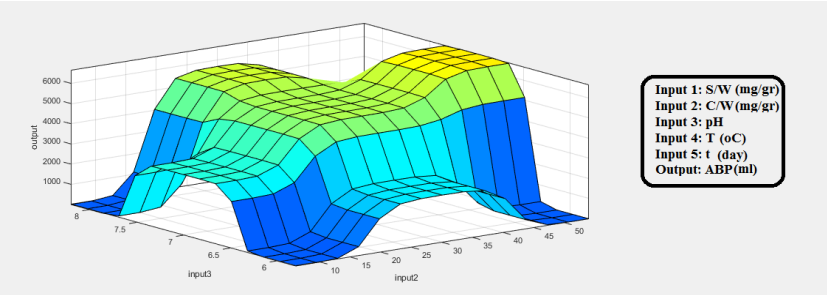

327

328


(e)

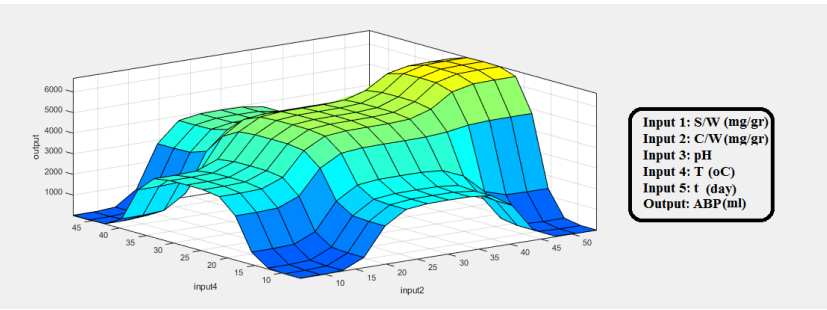


329

330


(f)

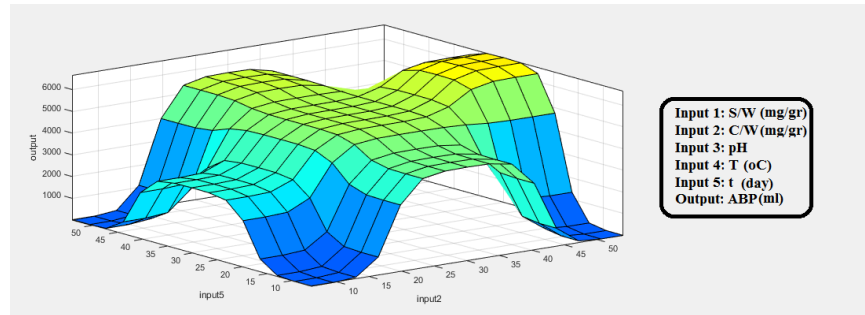


(g)

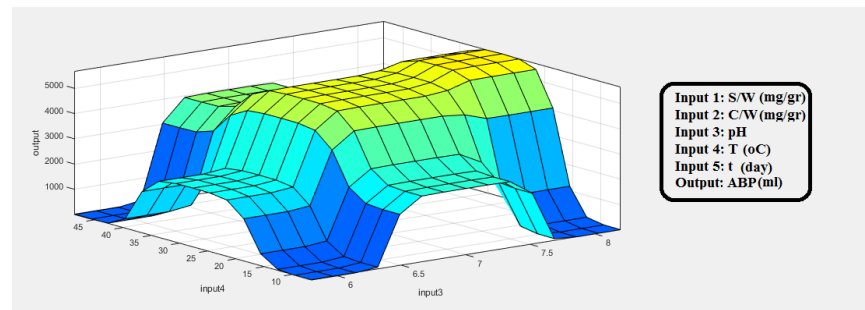

(h)

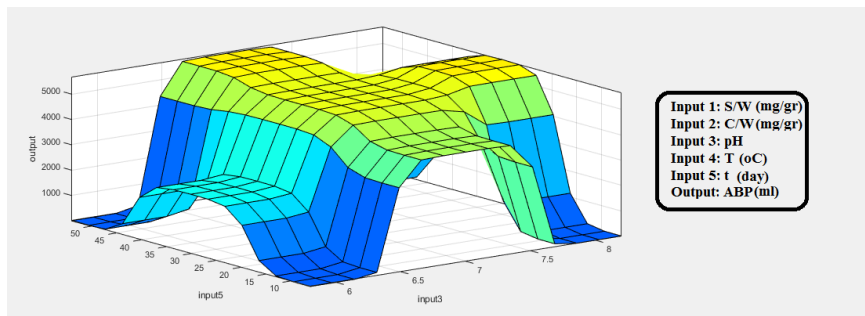

(i)

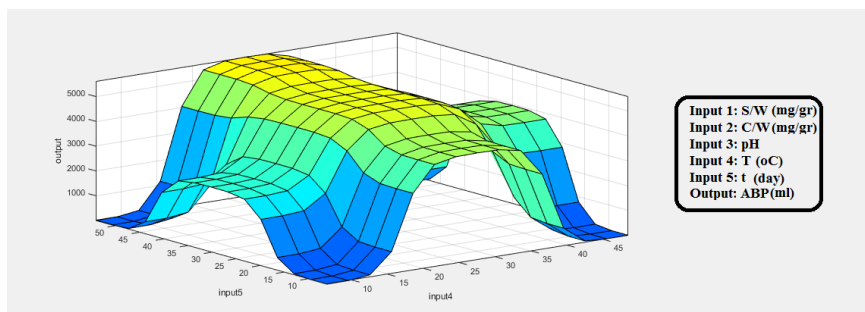

(j)

Fig. 13. The sensitive analysis of effective parameters in ANFIS model.

For creating DSS for smart controlling of bio-energy supplying, Petri Net modelling with combination of CCD-RSM optimization are utilized. The invented smart model for bio-energy

management is depicted in Fig. 14. In the mentioned smart system, all effective parameters containing S/W, C/W, pH, T and t are set on optimum conditions and they check and modify sequentially until to adjust in appropriate value through a loop. Also, the mentioned concept first, evaluate S/W and T because of their significant effects on ABP in the parallel lines. Then, in the other series, pH (Souring control plan in the biogas system [48]) and S/W are controlled and adjusted. Finally, time of reaction as the least important factor is checked and justified. With application of Petri Net modelling according to Fig. 14, optimum conditions of biogas generation system can be controlled smartly.

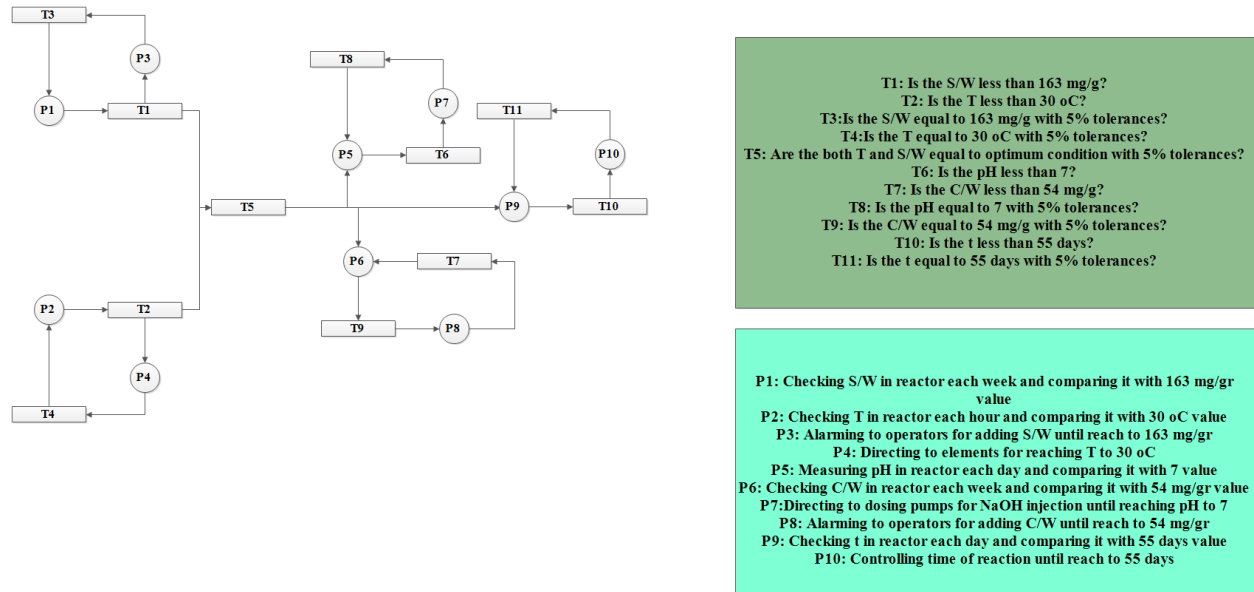


Fig. 14. The Petri Net modelling in present study.



3.3.Green building approach

The results of present research have illustrated that with the role of sludge-based bacteria is more significant than *Clostridiales*. For scrutinizing the mentioned result, the experimental setup is appraised in a run without sludge and in the other one without *Clostridiales*. In each run, all effective parameters are set in optimum conditions, just, sludge and *Clostridiales* injecting are eliminated in determined tests. The output of daily and accumulated biogas/methane vs time variations is illustrated as per Fig. 15. According to Fig. 15, with application of sludge (without *Clostridiales*) biogas and methane production are around twice as much as biogas production with *Clostridiales* (without sludge) during 55-day retention time. One of the main achievements in this research was linked to presenting smart model for dynamic integrated management of sludge and *Clostridiales* bio-engines in the same time.


In the following, the recent investigations approved that 99% of biogas productions including methane and carbon dioxide [49-52]. Also, the nutrients (Nitrogen and phosphor) and active anaerobic microorganisms are provided by injected sludge from secondary clarifier tank in SBR.

Thus, in the alone *Clostridiales* bioreactor the efficiency of anaerobic digester is reduced because of less nutrient and active microorganisms' values [53]. Likewise, the variation of TOC, COD and total alkaline of food wastes in both bioreactors (with *Clostridiales* and sludge) are illustrated in Fig. 16. According to this Fig., the organic matter digestion rate of sludge-based system is more than *Clostridiales* based bioreactor which is related to biodegradation ability of sludge-based microorganisms [54]. The alkalinity increasing in both reactors can be related to protein and amino acid biodegradation in the sequential reactions (Equation 3) [55]. While, in sludge-based system, rate of biodegradation is more than alone *Clostridiales* system and therefore, the amounts of total alkaline is increased in the declared system.

Equation 3

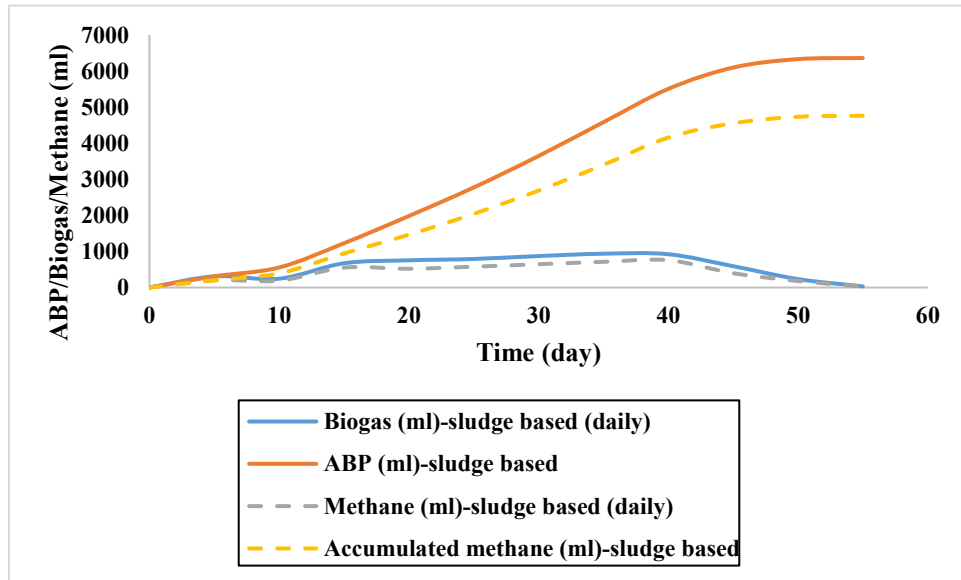


(a)

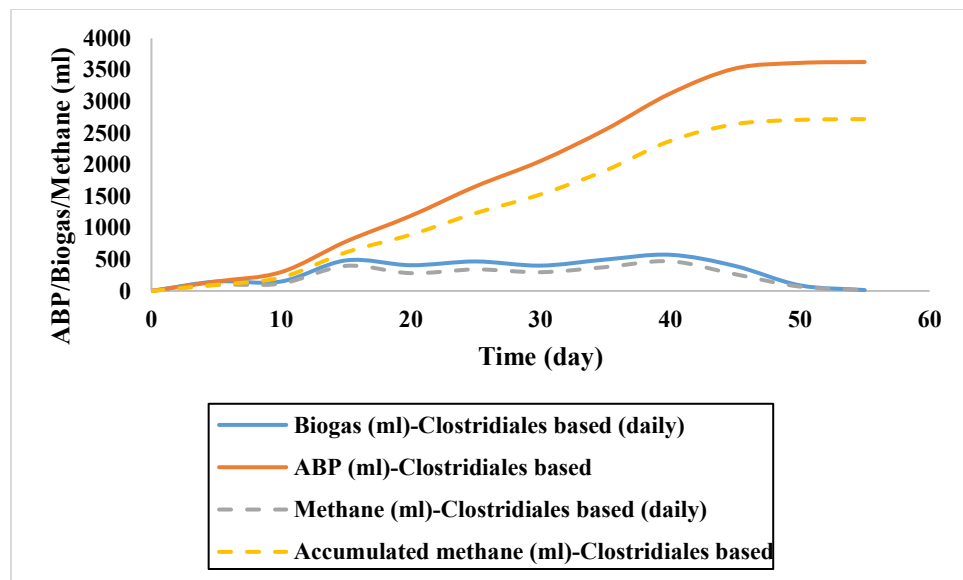


(b)


Fig. 15. Daily and accumulated biogas/methane production in (a) sludge based system and (b) Clostridiales based system.

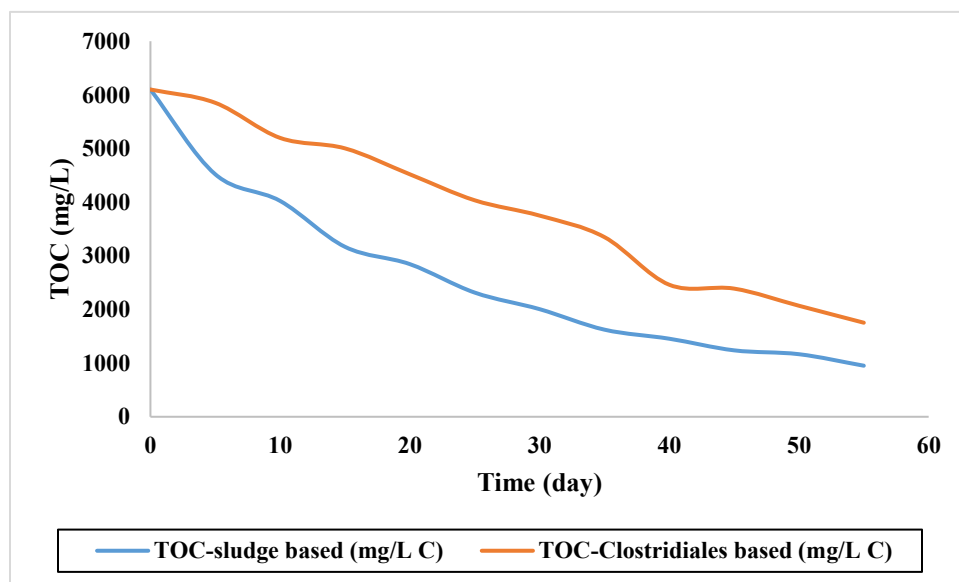

(a)

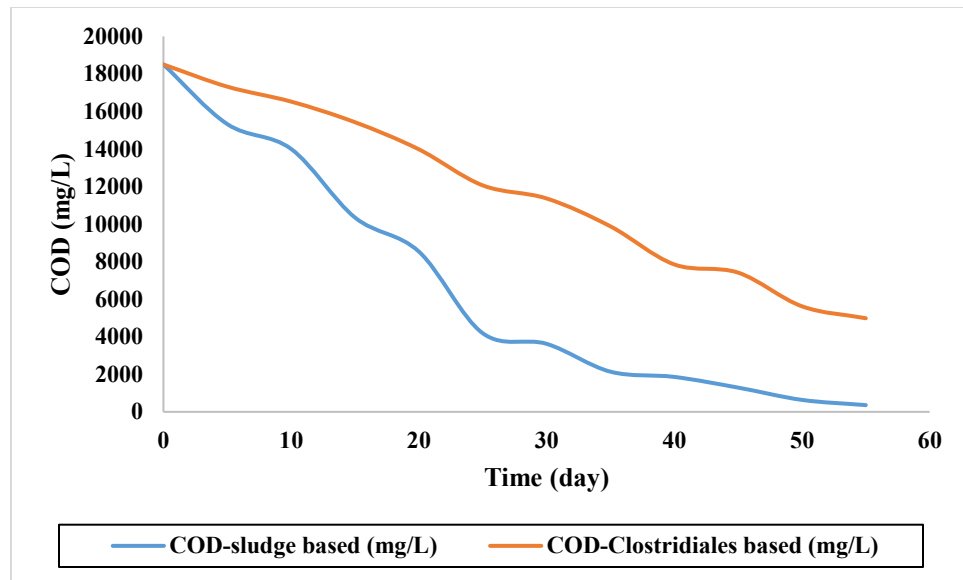

(b)

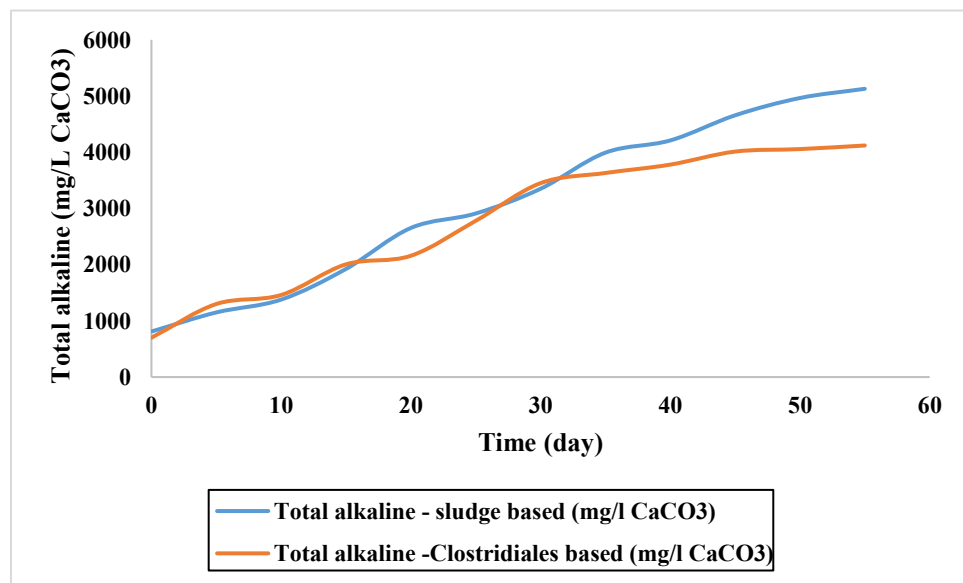

(c)

Fig. 16. Efficiency of sludge and Clostridiales based systems for food waste biodegradation as per (a) TOC (b) COD and (c) total alkaline fluctuations.

As a result, it is clear that integration of SBR's sludge and Clostridiales can enhance the efficiency of bio-reactor in this study. Also, as can be seen in Table S.1, the integrated bioreactor has the acceptable efficiency in the low retention time and temperature which is affected by dual bio-engine activities in the same time [56]. In the last part of this research, pattern of energy production according to Circular Economy [57], Industry Ecology (IE) [58], Integrated Solid Waste Management (ISWM) [59] and Sustainable Development Goals (SDGs) [60] is illustrated in Fig.

17. Whereas, the digested food waste is biogas generation procedure can be useful as a fertilizer [61,62]. As per Fig. 17, the electrical energy generation of biogas system in present research can supply all energy demand based on Fig. 4. Also, the produced energy can be utilized for heat demand with 3051 MJ in 55-day (One operating duration) as a bio-energy supplying in green buildings. Finally, the digested organic materials with 310 mg/L COD value is appropriate for green environmental supporting in residential complex in the case study. Also, with considering to Fig. 4, the energy demand of case study is ranged 250 – 350 kwh/month and based on the achievements of present study, the available biogas energy is around 175 kwh/month (By 40% efficiency [63]). Therefore, around 50% of energy demand in the case study can be provided by biogas production in the present study.

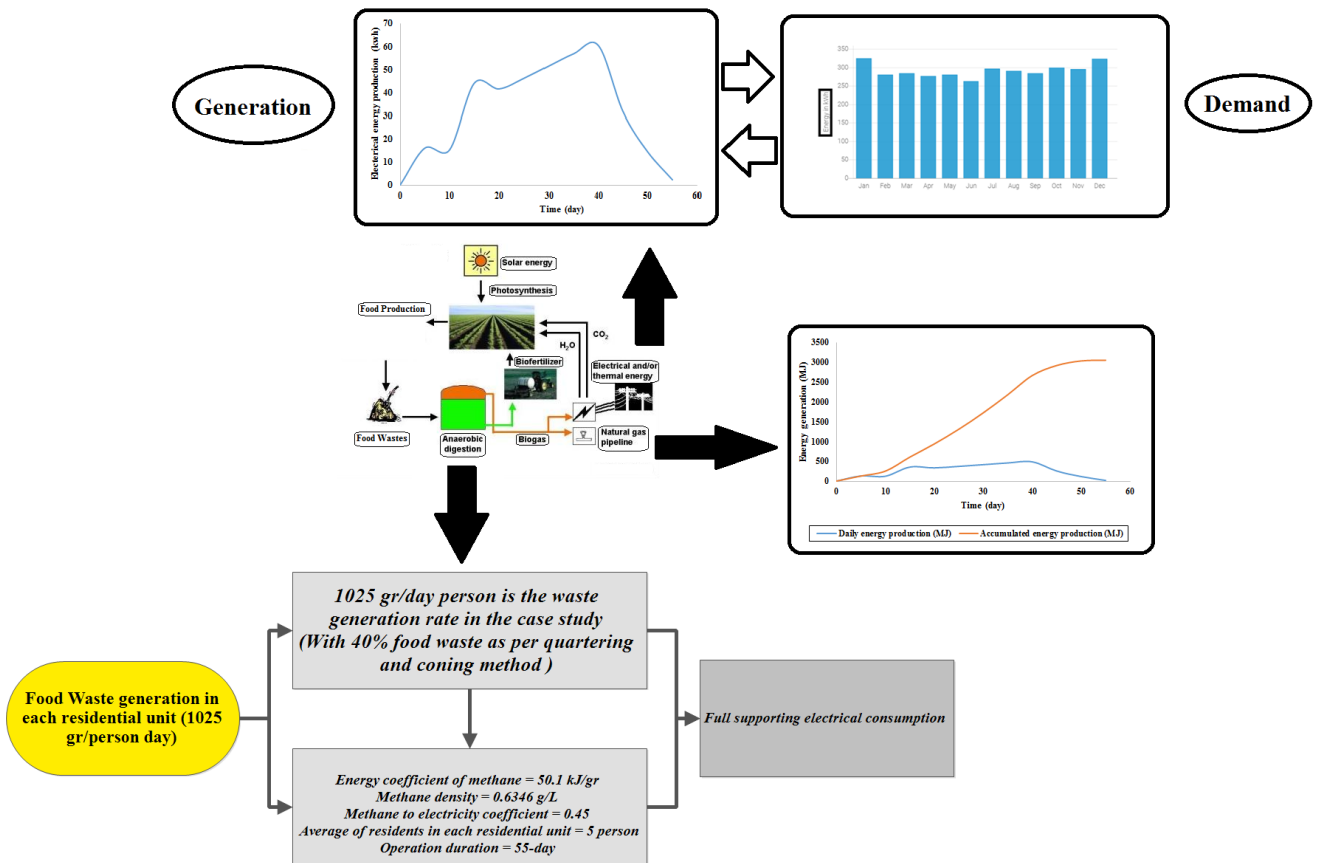


Fig. 17. The conceptual model of CE, ISWM and SDGs for implementation of green buildings in present investigation.

4. Conclusion

Food wastes have high level of variety in forming compositions containing proteins, fatty acids, carbohydrates, vitamins and other organic matters that they can product considerable biogas/methane through anaerobic digestion process. The declared technique is so beneficial for

waste management and bio-energy supplying in the same time as a novel approach in green buildings. One of the main concerns about application of biological process in energy supplying is related to complexity of operation. Therefore, combination of smart controlling soft systems with biodegradation techniques can cover the weakness of bio-systems.

The main experimental, numerical and simulation practices in present research including:

- Preparing lab-scale setup for anaerobic digestion of food wastes with SBR's sludge and *Clostridiales* microorganisms.
- Optimizing and sensitive analyzing effective parameters by CCD-RSM technique.
- Implementation of smart system with four soft computing techniques containing RT, RF, ANN and ANFIS.
- Creating dynamic control system for adjusting effective parameters with Petri Net modelling.
- Assessment of SBR's sludge and *Clostridiales* on food waste anaerobic digestion in separated reactors.
- Presenting conceptual model as a CE platform for green buildings.

In the following, as per all experimental and computational efforts the main outcomes are listed below.

- Optimum values of S/W, C/W, pH, T and t are computed equal to 163 mg/g, 54 mg/g, 7, 30 °C and 55 days, respectively based on CCD-RSM optimization.
- The most significant effective factors on ABP/Methane production are S/W and T with less than 0.0001 P-value according to ANOVA calculations.
- The correlation coefficient of RT, RF, ANN and ANFIS computations are equal to 0.93, 0.87, 0.91 and 0.99 values. Therefore, ANFIS model has the best precision for ABP forecasting in DSS.
- In the Petri Net model, controlling S/W and T is prioritized in comparison of other parameters because of their P-value and F-value amounts.
- The efficiency of SBR's sludge is more than *Clostridiales* based bioreactor because of nutrient availability and activity of microorganisms. In the same conditions, methane production of sludge-based bioreactor 42% is more than other one.
- With performing bio-energy supplying 381 kwh (3051 MJ) can be obtained that is enough for electrical energy demand or heat energy consumption.

References:

- 1- Mojtahedi, M., Fathollahi-Fard, A.M., Tavakkoli-Moghaddam, R. and Newton, S., 2021. Sustainable vehicle routing problem for coordinated solid waste management. *Journal of Industrial Information Integration*, 23, p.100220.

- 2- Eftekhari, M., Gheibi, M., Azizi-Toupkanloo, H., Hossein-Abadi, Z., Khraisheh, M., Fathollahi-Fard, A.M. and Tian, G., 2021. Statistical optimization, soft computing prediction, mechanistic and empirical evaluation for fundamental appraisal of copper, lead and malachite green adsorption. *Journal of Industrial Information Integration*, 23, p.100219.
- 3- Ali, S.M., Paul, S.K., Chowdhury, P., Agarwal, R., Fathollahi-Fard, A.M., Jabbour, C.J.C. and Luthra, S., 2021. Modelling of supply chain disruption analytics using an integrated approach: An emerging economy example. *Expert Systems with Applications*, 173, p.114690.
- 4- Theophilus, O., Dulebenets, M.A., Pasha, J., Lau, Y.Y., Fathollahi-Fard, A.M. and Mazaheri, A., 2021. Truck scheduling optimization at a cold-chain cross-docking terminal with product perishability considerations. *Computers & Industrial Engineering*, 156, p.107240.
- 5- Pasha, J., Dulebenets, M.A., Fathollahi-Fard, A.M., Tian, G., Lau, Y.Y., Singh, P. and Liang, B., 2021. An integrated optimization method for tactical-level planning in liner shipping with heterogeneous ship fleet and environmental considerations. *Advanced Engineering Informatics*, 48, p.101299.
- 6- Zhang, C., Fathollahi-Fard, A.M., Li, J., Tian, G. and Zhang, T., 2021. Disassembly Sequence Planning for Intelligent Manufacturing Using Social Engineering Optimizer. *Symmetry*, 13(4), p.663.
- 7- Islam, M.R., Ali, S.M., Fathollahi-Fard, A.M. and Kabir, G., 2021. A novel particle swarm optimization-based grey model for the prediction of warehouse performance. *Journal of Computational Design and Engineering*, 8(2), pp.705-727.
- 8- Cai, W., Yang, K., Wu, L., Huang, G., Santoso, A., Ng, B., Wang, G. and Yamagata, T., 2021. Opposite response of strong and moderate positive Indian Ocean Dipole to global warming. *Nature Climate Change*, 11(1), pp.27-32.
- 9- Noorollahi, Y., Janalizadeh, H., Yousefi, H. and Jahangir, M.H., 2021. Biofuel for energy self-sufficiency in agricultural sector of Iran. *Sustainable Energy Technologies and Assessments*, 44, p.101069.
- 10- More, M., Agrawal, C., Sharma, D., Rathore, N. and Samar, K., 2021. Development of Pellet Machine for Utilization of Biogas Slurry. In *Advances in Engineering Design* (pp. 509-519). Springer, Singapore.
- 11- Tagne, R.F.T., Dong, X., Anagho, S.G., Kaiser, S. and Ulgiati, S., 2021. Technologies, challenges and perspectives of biogas production within an agricultural context. The case of China and Africa. *Environment, Development and Sustainability*, pp.1-28.
- 12- de Sousa, M.H., da Silva, A.S.F., Correia, R.C., Leite, N.P., Bueno, C.E.G., dos Santos Pinheiro, R.L., de Santana, J.S., da Silva, J.L., Sales, A.T., de Souza, C.C. and da Silva Aquino, K.A., 2021. Valorizing municipal organic waste to produce biodiesel, biogas, organic fertilizer, and value-added chemicals: an integrated biorefinery approach. *Biomass Conversion and Biorefinery*, pp.1-15.

- 13- Chen, T., Qiu, X., Feng, H., Yin, J. and Shen, D., 2021. Solid digestate disposal strategies to reduce the environmental impact and energy consumption of food waste-based biogas systems. *Bioresource Technology*, 325, p.124706.
- 14- Yong, Z.J., Bashir, M.J. and Hassan, M.S., 2021. Biogas and biofertilizer production from organic fraction municipal solid waste for sustainable circular economy and environmental protection in Malaysia. *Science of The Total Environment*, 776, p.145961.
- 15- Su, B., Wang, H., Zhang, X., He, H. and Zheng, J., 2021. Using photovoltaic thermal technology to enhance biomethane generation via biogas upgrading in anaerobic digestion. *Energy Conversion and Management*, 235, p.113965.
- 16- Sarkar, O., Santhosh, J., Dhar, A. and Mohan, S.V., 2021. Green hythane production from food waste: Integration of dark-fermentation and methanogenic process towards biogas upgradation. *International Journal of Hydrogen Energy*, 46(36), pp.18832-18843.
- 17- Avila, R., Carrero, E., Vicent, T. and Blázquez, P., 2021. Integration of enzymatic pretreatment and sludge co-digestion in biogas production from microalgae. *Waste Management*, 124, pp.254-263.
- 18- Dinnebier, H.C.F., Matthiensen, A., Michelon, W., Tápparo, D.C., Fonseca, T.G., Favretto, R., Steinmetz, R.L.R., Treichel, H., Antes, F.G. and Kunz, A., 2021. Phycoremediation and biomass production from high strong swine wastewater for biogas generation improvement: An integrated bioprocess. *Bioresource Technology*, 332, p.125111.
- 19- Boffardi, R., De Simone, L., De Pascale, A., Ioppolo, G. and Arbolino, R., 2021. Best-compromise solutions for waste management: Decision support system for policymaking. *Waste Management*, 121, pp.441-451.
- 20- Kim, S., Mostafa, A., Im, S., Lee, M.K., Kang, S., Na, J.G. and Kim, D.H., 2021. Production of high-calorific biogas from food waste by integrating two approaches: Autogenerative high-pressure and hydrogen injection. *Water Research*, 194, p.116920.
- 21- Ajieh, M.U., Isagba, E.S., Ihoeghian, N., Edosa, V.I., Amenaghawon, A., Oshoma, C.E., Erhunmwunse, N., Obuekwe, I.S., Tongo, I., Emokaro, C. and Ezemonye, L.I., 2021. Assessment of sociocultural acceptability of biogas from faecal waste as an alternative energy source in selected areas of Benin City, Edo State, Nigeria. *Environment, Development and Sustainability*, pp.1-18.
- 22- Chowdhury, H., Chowdhury, T., Miskat, M.I., Hossain, N., Chowdhury, P. and Sait, S.M., 2021. Potential of biogas and bioelectricity production from Rohingya camp in Bangladesh: A case study. *Energy*, 214, p.118837.
- 23- Llano, T., Arce, C. and Finger, D.C., 2021. Optimization of biogas production through anaerobic digestion of municipal solid waste: a case study in the capital area of Reykjavik, Iceland. *Journal of Chemical Technology & Biotechnology*, 96(5), pp.1333-1344.
- 24- Cavaignac, R.S., Ferreira, N.L. and Guardani, R., 2021. Techno-economic and environmental process evaluation of biogas upgrading via amine scrubbing. *Renewable Energy*, 171, pp.868-880.

- 25- Miranda, I.T.P., Moletta, J., Pedroso, B., Pilatti, L.A. and Picinin, C.T., 2021. A Review on Green Technology Practices at BRICS Countries: Brazil, Russia, India, China, and South Africa. *SAGE Open*, 11(2), p.21582440211013780.
- 26- Niu, S., Dai, R., Zhong, S., Wang, Y., Qiang, W. and Dang, L., 2021. Multiple benefit assessment and suitable operation mechanism of medium-and large-scale biogas projects for cooking fuel in rural Gansu, China. *Sustainable Energy Technologies and Assessments*, 46, p.101285.
- 27- Abanades, S., Abbaspour, H., Ahmadi, A., Das, B., Ehyaei, M.A., Esmaeilion, F., Assad, M.E.H., Hajilounezhad, T., Jamali, D.H., Hmida, A. and Ozgoli, H.A., 2021. A critical review of biogas production and usage with legislations framework across the globe. *International Journal of Environmental Science and Technology*, pp.1-24.
- 28- Lomazov, V.A., Lomazova, V.I., Miroshnichenko, I.V., Petrosov, D.A. and Mironov, A.L., 2021, February. Optimum planning of experimental research at the biogas plant. In *IOP Conference Series: Earth and Environmental Science* (Vol. 659, No. 1, p. 012111). IOP Publishing.
- 29- Stürmer, B., Leiers, D., Anspach, V., Brüggling, E., Scharfy, D. and Wissel, T., 2021. Agricultural biogas production: A regional comparison of technical parameters. *Renewable Energy*, 164, pp.171-182.
- 30- Jung, S., Lee, J., Moon, D.H., Kim, K.H. and Kwon, E.E., 2021. Upgrading biogas into syngas through dry reforming. *Renewable and Sustainable Energy Reviews*, 143, p.110949.
- 31- Akbulut, A., Arslan, O., Arat, H. and Erbaş, O., 2021. Important aspects for the planning of biogas energy plants: Malatya case study. *Case Studies in Thermal Engineering*, 26, p.101076.
- 32- Brémond, U., Bertrandias, A., de Buyer, R., Latrille, E., Jimenez, J., Escudié, R., Steyer, J.P., Bernet, N. and Carrere, H., 2021. Recirculation of solid digestate to enhance energy efficiency of biogas plants: Strategies, conditions and impacts. *Energy Conversion and Management*, 231, p.113759.
- 33- Naquash, A., Qyyum, M.A., Haider, J., Lim, H. and Lee, M., 2021. Renewable LNG production: Biogas upgrading through CO₂ solidification integrated with single-loop mixed refrigerant biomethane liquefaction process. *Energy Conversion and Management*, 243, p.114363.
- 34- Zhang, J., Gu, D., Chen, J., He, Y., Dai, Y., Loh, K.C. and Tong, Y.W., 2021. Assessment and optimization of a decentralized food-waste-to-energy system with anaerobic digestion and CHP for energy utilization. *Energy Conversion and Management*, 228, p.113654.
- 35- Wu, T., Bu, S., Wei, X., Wang, G. and Zhou, B., 2021. Multitasking multi-objective operation optimization of integrated energy system considering biogas-solar-wind renewables. *Energy Conversion and Management*, 229, p.113736.
- 36- Su, B., Wang, H., Zhang, X., He, H. and Zheng, J., 2021. Using photovoltaic thermal technology to enhance biomethane generation via biogas upgrading in anaerobic digestion. *Energy Conversion and Management*, 235, p.113965.

- 37- Hansen, A.D., Sorensen, P., Hansen, L.H. and Bindner, H., 2000. Models for a stand-alone PV system. Roskilde: Rio National Laboratory.
- 38- Sulaeman, S., Brown, E., Quispe-Abad, R. and Müller, N., 2021. Floating PV system as an alternative pathway to the amazon dam underproduction. *Renewable and Sustainable Energy Reviews*, 135, p.110082.
- 39- Lohani, S.P., Shakya, S., Gurung, P., Dhungana, B., Paudel, D. and Mainali, B., 2021. Anaerobic co-digestion of food waste, poultry litter and sewage sludge: seasonal performance under ambient condition and model evaluation. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, pp.1-16.
- 40- Ziaee, F., Mokhtarani, N. and Niavol, K.P., 2021. Solid-state anaerobic co-digestion of organic fraction of municipal waste and sawdust: impact of co-digestion ratio, inoculum-to-substrate ratio, and total solids. *Biodegradation*, pp.1-14.
- 41- Guo, Z., Usman, M., Alsareii, S.A., Harraz, F.A., Al-Assiri, M.S., Jalalah, M., Li, X. and Salama, E.S., 2021. Synergistic ammonia and fatty acids inhibition of microbial communities during slaughterhouse waste digestion for biogas production. *Bioresource Technology*, p.125383.
- 42- Eftekhari, M., Gheibi, M., Azizi-Toupkanloo, H., Hossein-Abadi, Z., Khraisheh, M., Fathollahi-Fard, A.M. and Tian, G., 2021. Statistical optimization, soft computing prediction, mechanistic and empirical evaluation for fundamental appraisal of copper, lead and malachite green adsorption. *Journal of Industrial Information Integration*, 23, p.100219.
- 43- Gheibi, M., Karrabi, M. and Eftekhari, M., 2019. Designing a smart risk analysis method for gas chlorination units of water treatment plants with combination of Failure Mode Effects Analysis, Shannon Entropy, and Petri Net Modeling. *Ecotoxicology and environmental safety*, 171, pp.600-608.
- 44- Amini, M.H., Arab, M., Faramarz, M.G., Ghazikhani, A. and Gheibi, M., 2021. Presenting a soft sensor for monitoring and controlling well health and pump performance using machine learning, statistical analysis, and Petri net modeling. *Environmental Science and Pollution Research*, pp.1-17.
- 45- Mohammadi, M., Gheibi, M., Fathollahi-Fard, A.M., Eftekhari, M., Kian, Z. and Tian, G., 2021. A hybrid computational intelligence approach for bioremediation of amoxicillin based on fungus activities from soil resources and aflatoxin B1 controls. *Journal of Environmental Management*, 299, p.113594.
- 46- Ghadami, N., Gheibi, M., Kian, Z., Faramarz, M.G., Naghedi, R., Eftekhari, M., Fathollahi-Fard, A.M., Dulebenets, M.A. and Tian, G., 2021. Implementation of solar energy in smart cities using an integration of artificial neural network, photovoltaic system and classical Delphi methods. *Sustainable Cities and Society*, 74, p.103149.
- 47- Ghadirimoghaddam, D., Gheibi, M. and Eftekhari, M., 2021. Graphene oxide-cyanuric acid nanocomposite as a novel adsorbent for highly efficient solid phase extraction of Pb²⁺

- followed by electrothermal atomic absorption spectrometry; statistical, soft computing and mechanistic efforts. *International Journal of Environmental Analytical Chemistry*, pp.1-22.
- 48- Latifi, P., Karrabi, M. and Danesh, S., 2019. Anaerobic co-digestion of poultry slaughterhouse wastes with sewage sludge in batch-mode bioreactors (effect of inoculum-substrate ratio and total solids). *Renewable and Sustainable Energy Reviews*, 107, pp.288-296.
- 49- Rajendran, K., Aslanzadeh, S. and Taherzadeh, M.J., 2012. Household biogas digesters—A review. *Energies*, 5(8), pp.2911-2942.
- 50- Abatzoglou, N. and Boivin, S., 2009. A review of biogas purification processes. *Biofuels, Bioproducts and Biorefining*, 3(1), pp.42-71.
- 51- Mao, C., Feng, Y., Wang, X. and Ren, G., 2015. Review on research achievements of biogas from anaerobic digestion. *Renewable and sustainable energy reviews*, 45, pp.540-555.
- 52- Kougias, P.G. and Angelidaki, I., 2018. Biogas and its opportunities—A review. *Frontiers of Environmental Science & Engineering*, 12(3), pp.1-12.
- 53- Jiang, X., Sommer, S.G. and Christensen, K.V., 2011. A review of the biogas industry in China. *Energy Policy*, 39(10), pp.6073-6081.
- 54- Černý, M., Vítězová, M., Vítěz, T., Bartoš, M. and Kushkevych, I., 2018. Variation in the distribution of hydrogen producers from the clostridiales order in biogas reactors depending on different input substrates. *Energies*, 11(12), p.3270.
- 55- Metcalf & Eddy, Abu-Orf, M., Bowden, G., Burton, F.L., Pfrang, W., Stensel, H.D., Tchobanoglous, G., Tsuchihashi, R. and AECOM (Firm), 2014. *Wastewater engineering: treatment and resource recovery*. McGraw Hill Education.
- 56- SONG, J.L., RUAN, Z.Y., HU, G.Q., JIANG, R.B., LIU, X.F. and XU, F.H., 2010. Microbial diversity and community composition in biogas sludge and its enriched product. *China Biogas*, 28(2), pp.3-11.
- 57- Kapoor, R., Ghosh, P., Kumar, M., Sengupta, S., Gupta, A., Kumar, S.S., Vijay, V., Kumar, V., Vijay, V.K. and Pant, D., 2020. Valorization of agricultural waste for biogas based circular economy in India: A research outlook. *Bioresource technology*, 304, p.123036.
- 58- Makisha, N., 2016. Waste water and biogas—ecology and economy. *procedia engineering*, 165, pp.1092-1097.
- 59- Anyaoku, C.C. and Baroutian, S., 2018. Decentralized anaerobic digestion systems for increased utilization of biogas from municipal solid waste. *Renewable and Sustainable Energy Reviews*, 90, pp.982-991.
- 60- Lohani, S.P., Dhungana, B., Horn, H. and Khatiwada, D., 2021. Small-scale biogas technology and clean cooking fuel: Assessing the potential and links with SDGs in low-income countries—A case study of Nepal. *Sustainable Energy Technologies and Assessments*, 46, p.101301.
- 61- Sogn, T.A., Dragicevic, I., Linjordet, R., Krogstad, T., Eijsink, V.G. and Eich-Greatorex, S., 2018. Recycling of biogas digestates in plant production: NPK fertilizer value and risk of leaching. *International Journal of Recycling of Organic Waste in Agriculture*, 7(1), pp.49-58.

- 642 62- Liang, F., Xu, L., Ji, L., He, Q., Wu, L. and Yan, S., 2021. A new approach for biogas slurry
643 disposal by adopting CO₂-rich biogas slurry as the flower fertilizer of *Spathiphyllum*:
644 Feasibility, cost and environmental pollution potential. *Science of The Total Environment*,
645 770, p.145333.
- 646 63- Hakawati, R., Smyth, B.M., McCullough, G., De Rosa, F. and Rooney, D., 2017. What is the
647 most energy efficient route for biogas utilization: heat, electricity or transport?. *Applied*
648 *Energy*, 206, pp.1076-1087.
- 649