



## **UWL REPOSITORY**

**repository.uwl.ac.uk**

A comprehensive framework for risk probability assessment of landfill fire incidents using fuzzy fault tree analysis

Masalegooyan, Zeinab, Piadeh, Farzad ORCID logoORCID: <https://orcid.org/0000-0002-4958-6968> and Behzadian, Kourosh ORCID logoORCID: <https://orcid.org/0000-0002-1459-8408> (2022) A comprehensive framework for risk probability assessment of landfill fire incidents using fuzzy fault tree analysis. Process Safety and Environmental Protection, 163. pp. 679-693. ISSN 0957-5820

<http://dx.doi.org/10.1016/j.psep.2022.05.064>

This is the Accepted Version of the final output.

UWL repository link: <https://repository.uwl.ac.uk/id/eprint/9112/>

**Alternative formats:** If you require this document in an alternative format, please contact: [open.research@uwl.ac.uk](mailto:open.research@uwl.ac.uk)

### **Copyright:**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

**Take down policy:** If you believe that this document breaches copyright, please contact us at [open.research@uwl.ac.uk](mailto:open.research@uwl.ac.uk) providing details, and we will remove access to the work immediately and investigate your claim.

# A Comprehensive Framework for Risk Probability Assessment of Landfill Fire Incidents Using Fuzzy Fault Tree Analysis

Zeinab Masalegooyan<sup>a</sup>, Farzad Piadeh<sup>b</sup>, Kourosh Behzadian<sup>b,1</sup>

<sup>a</sup> Civil and Environmental Engineering Department, Amirkabir University of Technology, Hafez St., Tehran, Iran

<sup>b</sup> School of Computing and Engineering, University of West London, St Mary's Rd, London, W5 5RF, UK

## Abstract

Landfill fire is the most frequent type of incidents in the waste management complexes. This paper presents a new framework for risk probability evaluation of major fires in landfills using the fuzzy fault tree analysis. The framework starts with construction of the fault tree of landfill fire comprised of 38 basic and 22 intermediate events with the corresponding type of faults under managerial, executive, human, and environmental conditions. Fault tree quantitative analysis is carried out through a combination of fuzzy set theory and experts' judgements to overcome the lack of data limitation. Two new sensitivity analysis approaches are used to identify the critical fault type and critical paths in the fault tree. The proposed framework is demonstrated by its application to a real-world case of a landfill in Iran. The results show the probability of a major "fire incident" is 5.5% in which "fire occurrence" stands for 25% higher than "lack of preparation for controlling fire". In addition, "Waste's uncontrolled dumping" is recognised as the highest critical event by 6% for probability failure and 24% for importance degree. "Executive fault" also found as the most fault's critical type by frequency analysis of failure probability. The results also reveal the major impact of the experts' weights, especially for events related to human or management faults. These results can give decision-makers a profound insight into providing effective intervention strategies for minimising the risk of major landfill fire incidents.

**Keywords:** Comprehensive evaluation; Fuzzy fault tree analysis; Landfill fire incidents; Probability assessment; Sensitivity analysis

---

<sup>1</sup> Corresponding author. Tel.: +44 (0) 20 8231 2466  
E-mail address: [kourosh.behzadian@uwl.ac.uk](mailto:kourosh.behzadian@uwl.ac.uk)

## 1    **1    Introduction**

2    Today, the ever-increasing global population growth coupled with significant industrial development and  
3    world trades has led to a constant increase in the production of waste all over the world. As such, managing  
4    waste in a sustainable manner is a desirable goal for all countries that can underpin their national standards  
5    and legislation (Nanda, and Berruti, 2021). Although there is a broad consensus that landfilling is the least  
6    preferred method in the hierarchy of the waste management options due to the negligence for recovery and  
7    recycling potentials, adverse impacts on soils, water pollution, and greenhouse gas emissions, landfilling is  
8    still applied widely in the world especially in developing countries, mainly due to its relatively low cost,  
9    low-technical requirements, and simple operation (Fazzo *et al.*, 2020). Furthermore, some waste materials  
10    such as ash as an output of thermal treatment method or non-recyclable hazardous material still need to be  
11    landfilled (Ahluwalia and Patel, 2018). All this shows that landfill still stands as a conclusive method of  
12    integrated solid waste management (Nanda, and Berruti, 2021).

13    This method however suffers from some serious incidents and controversial failures, including slope  
14    failure, excessive and rapid surface settlement, failure in engineering components (such as liner systems,  
15    leachate or gas collection systems, drainage systems, and final cover systems), and surface or subsurface  
16    fires (Jahanfar *et al.*, 2017; Koda *et al.*, 2019). Among these failures/incidents, the occurrence of fires is  
17    significantly important. Based on statistical reports of landfill incidents in different countries, fires are the  
18    most chronic and ongoing global issue related to all kinds of landfills that have occurred frequently over  
19    the decades in both developing and developed countries (Moqbel and Reinhart, 2017; Ibrahim, 2020).  
20    Reviewing some reported landfill fires can shed light on the expanse of this incident. Federal Emergency  
21    Management Agency data on fire incidents at municipal landfills in the US shows there were approximately  
22    839 unique fire incidents each year from 2004 to 2010 (US Fire Administration, 2014). In Canada, Ontario,  
23    based on a survey of 43 landfill sites, 10% reported daily fires, 20% weekly, and 20% monthly (Chiblow,  
24    2004). In the United Kingdom, in 2002, Approximately 57 waste fire incidents have reported to the  
25    environmental agency over a 10-month period, and 53% of them were attributed to landfill fires (44% non-  
26    inert landfill and 9% inert landfill) (Copping *et al.*, 2007). In another study, over a period between 1998

1 and 2003, the Fire Service and Environment Agency reported 26 incidents of landfill fires within  
2 Northamptonshire, United Kingdom (Bates, 2004). In Sweden, millions of euros have been lost due to  
3 spontaneous waste fires (Ibrahim *et al.*, 2020), and the environmental impact of such fires is estimated to  
4 be larger than the impact of all incineration plants (Hogland and Marques, 2003). Based on a research by  
5 Ibrahim (2020) in Sweden, 111 waste management sites were surveyed for detecting waste fires over a  
6 period of seven years 2012\_2018 by remote sensing and GIS modelling. Results of this study reveal that  
7 landfills and recycle centres are respectively the major high-risk parts of Sweden's waste management chain  
8 for fire occurrence. In Poland, fire occurrence in the largest landfills and waste storage yards have been  
9 tripled from 23 incidents in 2010 to 79 incidents in 2018 (Bihałowicz *et al.*, 2021). In New Zealand, a  
10 national review of all landfills by the Ministry for the Environment in 1995 indicates more than half of the  
11 landfill operators experienced landfill fires during previous years (Boyle, 2000). In most Asian and African  
12 countries, there is no comprehensive study to report on the number and the frequency of landfill fire  
13 occurrence. Therefore, for these countries, we can refer to only a few case studies of massive incidents that  
14 highlighted case-oriented disasters such as Philippine (Jafari *et al.*, 2014), Indonesia (Koelsch *et al.*, 2005),  
15 and Nigeria (Rim-Rukeh, 2014). These incidents are often followed by slope instabilities, landfill collapses  
16 and many more casualties caused by prolonged landfill fires. However, it goes without saying that certainly,  
17 the reported statistics only indicate a few percentages of all landfill fire incidents (LFI). In fact, the majority  
18 of landfill fires occur in general refuse disposal areas and dumps in open ground or extinguish by landfill  
19 operators without any report to the fire departments.

20 Landfill fires can be a source of pollution and producing significant amount of hazardous toxic pollutants  
21 as harmful combustion may produce substances with high concentrations which can be dispersed over long  
22 distances through dense clouds of noxious smoke (Toro and Morales, 2018). Furthermore, damaging the  
23 integrity of the waste bulk, damaging the cover materials or liner, and also causing elevated gas and leachate  
24 pressure may cause landfill fires to be a main trigger for the occurrence of other aforementioned failures in  
25 landfill, especially slope failures (Jahanfar *et al.*, 2017). A major fire in a landfill can have severe impacts  
26 on the environment, safety, and health. From an environmental standpoint, landfill fires have potential for  
27 contamination of the environment by producing toxic gases containing harmful compounds such as

1 dioxins/furans and polynuclear aromatic hydrocarbons (Vaverková, 2019). Research in this field has  
2 confirmed the presence of pollution traces due to landfill fires and contamination emitted to air, water, soil,  
3 products, and vegetables in the affected areas (Escobar *et al.*, 2018; Cocean *et al.*, 2020). From a safety and  
4 health standpoint, landfill fires, especially subsurface fires, produce burned pockets of charred waste  
5 damaging the integrity of landfill bodies and reducing the shear strength, which results in slope instability  
6 or sudden surface collapse (Stark *et al.*, 2012). Consequently, firefighters and workers at the scene are at  
7 risk of serious injury or death, both from exposure to the high concentration of toxic fumes produced by  
8 the fire and from possible collapse due to the weight of personnel and equipment on the fireground (Adetona  
9 *et al.*, 2020). A landfill fire can also pose a long-term threat to neighbouring communities' health by  
10 transferring and dispersing a considerable number of pollutants in the form of dense clouds of noxious  
11 smoke, which pollutes the surrounding air, water, soil, and local farming areas (Aderemi and Otitoloju,  
12 2012). Additionally, in rural settlements that are close to landfills, a prolonged fire under the surface may  
13 result in the damage of the pile and the creation of a safety hazard for settlers by waste slides and collapses  
14 (Jahanfar *et al.*, 2017). For example, the Leuwigajah dumpsite slope failure in Bandung, Indonesia, in  
15 February 2005 caused 141 deaths due to significant rainfall and prolonged smouldering fire in the  
16 subsurface causing the failure of structural reinforcement in landfills (Koelsch *et al.*, 2005).

17 Hence, landfill fires pose a major hazard that needs to be considered in both planning and operational  
18 management of landfills. While techniques for detecting early fire in landfills have been developed  
19 recently, high priority should be given to developing plans for avoiding fire in landfills due to saving cost  
20 of detection, extinguishing the fire, cleaning up, and recovery (Radosavljevic *et al.*, 2016; Milosevic *et al.*,  
21 2018).

22 In general, there have been some research works developed for the assessment of reliability, failure or risk  
23 in landfills such as slope failure, failures of unique design features, e.g. liner failure or gas/ leachate  
24 collection system failure. Pivato (2011) evaluated landfill liner failure by using traditional hydrological risk  
25 assessments and the Delphi technique. Huang *et al* (2013) also used the artificial neural network model  
26 with the first-order reliability method and Monte Carlo simulation to evaluate the reliability for the stability

1 of landfills on the slope for different rainfall parameters. [Xu et al \(2014\)](#) proposed a holistic model for  
2 leakage risk assessment in landfills using the EPA's Composite Model for Leachate Migration model based  
3 on Monte Carlo method and Fault Tree Analysis (FTA). [Jahanfar et al \(2017\)](#) investigated the risk of slope  
4 failure in landfills by proposing a novel probabilistic risk assessment methodology to assess both hazard  
5 and vulnerability aspects of landfill slope failure using the Monte Carlo and Taylor series methods. [Sadeghi](#)  
6 [et al \(2020\)](#) used the failure mode method, effects analysis and analytic hierarchy process to assess the  
7 failure of the various design features in landfills. Finally, [Xu et al \(2021\)](#) proposed a new fibre-optic based  
8 large deformation transducer and numerical model for the stability analysis of landfills along with an early  
9 warning system. These attempts have taken great steps into consideration of safety approaches for  
10 managing failure occurrence in different engineering features of landfills during the design and operational  
11 phases. Although landfill fire can lead to the failure of other landfill features, little attention has been paid  
12 to the risk-based assessment of the LFI in the research communities in order to mitigate their risk and  
13 implement practical and effective safety measures.

14 There are several studies investigated risk assessment of fire incidents and relevant safety issues in various  
15 industries through the application of fire modelling and its integration to the risk-based design and operation  
16 of those industries to find effective strategies for risk mitigation and improve safety performance. [Khan and](#)  
17 [Abbasi \(1999\)](#) recapped major incidents including fire and explosion in chemical processing industries to  
18 understand the relevant damage potential used for risk assessment. [Khan and Amyotte \(2004\)](#) were amongst  
19 one of the first attempts to develop a conceptual framework of an integrated inherent safety index (I2SI)  
20 for loss prevention and risk management of fire, explosion and toxic hazards in process industries.  
21 [Dadashzadeh et al. \(2013\)](#) proposed a new integrated approach for modelling the interaction of fire and  
22 explosion accidents in processing facilities based on an evolving accident scenario by using computational fluid  
23 dynamics (CFD). [Dadashzadeh et al. \(2014\)](#) also used CFD to develop a new risk-based assessment for fire  
24 accidents of combustion products in confined or semi-enclosed facilities. [Baalisampang et al. \(2018\)](#) carried  
25 out a comprehensive review of fire and explosion accidents in marine transportation industry. They specifically  
26 analysed underlying causes and identified potential measures such as alternative fuels to prevent or minimise  
27 those fire and explosion accidents. [Baalisampang et al \(2019\)](#) developed a new risk-based approach for

1 modelling an integrated impact of fire, explosion and combustion products within the accidental leakage of  
2 LNG (liquefied natural gas) in LNG processing facilities. [Ding et al \(2020\)](#) proposed a framework for  
3 qualitative risk management of material storage fire within the processes of industry plants based on Bow-  
4 tie analysis and relevant safety measures to reduce storage fire risk. [Ding et al \(2021\)](#) also proposed a novel  
5 risk management approach to reduce the fire-induced domino effect in chemical plants, by leveraging  
6 loading/unloading demands based on risk aggregation and inventory management. Similarly, [Huang et al](#)  
7 [\(2021\)](#) proposed a dynamic model for propagation of fire-induced domino effects in chemical process  
8 industries by using matrix calculation coupled with Monte Carlo simulation.

9 However, despite the frequent occurrence of fires in waste management industries especially fires in  
10 landfills with major adverse impacts, to the best of the authors' knowledge, the risk-based assessment of  
11 the LFI has been investigated by few cases. [Dokas et al. \(2009\)](#) developed a web-based expert system for  
12 early warning and emergency response system to any possible operational landfill problems and accidents  
13 including landfill fires. Furthermore, [Obeid et al \(2020\)](#) investigated the causes of ignition for surface fire  
14 in Malaysian landfills and assessed the consequence and health risk of this incident. Another study  
15 conducted by [Sabrin et al \(2021\)](#) investigated a risk-based analysis of subsurface elevated temperatures in  
16 landfills for a range of gas variables to find safe and unsafe ranges of gas variables and subsurface  
17 temperature. The current study aims to investigate both types of surface and subsurface fires in all types of  
18 landfills in order to develop a comprehensive framework for risk probability assessment of the LFI and  
19 identify their critical causes.

20 This study aims to present a novel approach for fault detection and categorisation, develops a fault tree for  
21 a major fire in a landfill, and uses fuzzy set theory and expert judgement to perform a quantitative analysis  
22 of landfill fire risk probability. Finally, as an important step, this study analyses the sensitivity of the fault  
23 tree to a variety of values (basic events, intermediate events, type of fault, minimal cut sets) in order to  
24 identify the critical variables that have the greatest effect on the final results. This paper is organised in the  
25 following three sections. First, the methodology including the details of fault tree construction and  
26 development of the Fuzzy FTA (FFTA) for landfill fire assessment is described in the next section. Then,


1 the application of the proposed methodology on a real case study is demonstrated, and results are analysed  
2 and discussed. Finally, the conclusions are drawn with further recommendations for future research works.  
3

## 4 **2 Methodology**


5 This paper presents a comprehensive framework for risk probability assessment of the LFI. The framework  
6 comprises three main steps as shown in Figure 1. The first step starts with developing the fault tree of the  
7 LFI through the identification of events and their corresponding types of faults, as well as determining  
8 events relationships in order to create branches. The second step consists of generating failure probabilities  
9 of basic events by using the combination of fuzzy set theory and experts' judgement with considering their  
10 weighting scores. The third step includes quantitative analysis for calculating the failure probability of  
11 events and measuring importance degree based on sensitivity analysis in three levels: (1) basic events and  
12 minimal cut sets (2) intermediate events to identify critical paths; and (3) groups of basic events in a  
13 particular fault for identifying the critical type of fault.



### Step 1. Comprehensive fault tree development

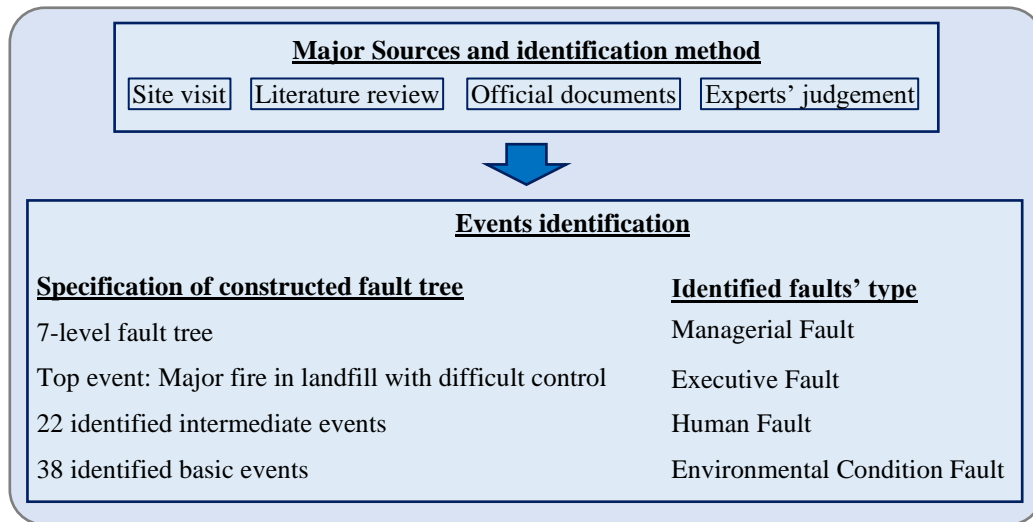

### Step 2. Fuzzy fault tree analysis

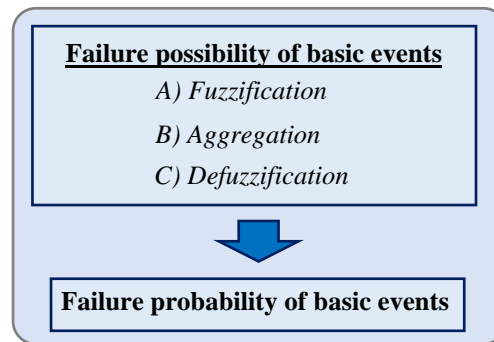

### Step 3. Comprehensive fault tree analysis

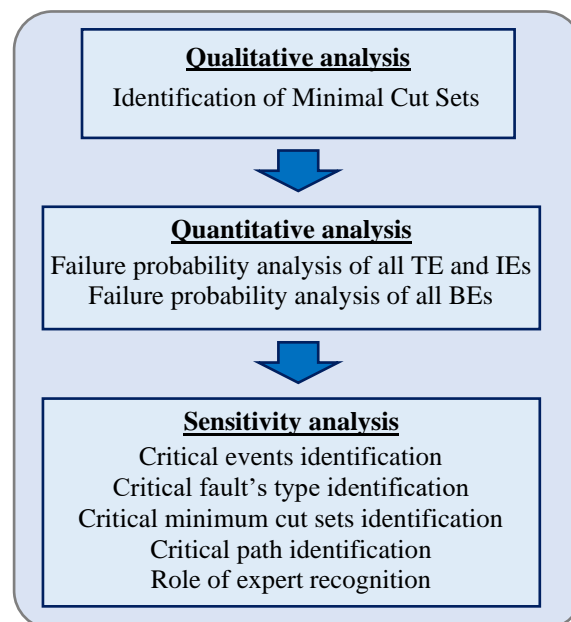



Figure 1. Proposed framework for comprehensive risk-based assessment of the LFI

## 2.1 Fault tree of Landfill Fire Incidents (LFI)

Among all techniques for reliability and failure assessment such as FTA, Event Tree Analysis (ETA), Hazard Analysis, Bayesian Analysis, or Cause and Effect Analysis, FTA is selected for this study as it has been used and recommended by many studies associated with risk analysis of similar studies due to its ability to (1) identify and model the failure path and relation of root causes, (2) estimate the safety and reliability of the complex systems, and (3) diagnose and describe undesired events (Kabir *et al.*, 2019; Koda *et al.*, 2019).

The FTA is constructed here based on a top-down approach starting from a top event (TE) i.e. landfill fire, continued by passing through layers of created intermediate events (IE) on a cause-effect basis, and finally ended to root causes called basic events (BE). All events in the fault tree of the LFI here are identified based on the information collected from one of these sources: (1) site visits, (2) official documents such as consulting reports and other relevant articles (3) experts' judgement, and (4) scientific literature review. Based on the information collected from these sources, the landfill fire events can be classified under four main failure types including managerial, executive, human faults and faults due to environmental conditions. More specifically, Managerial Faults (MF) refer to those faults initiating from actions responsible by management or managerial team of the landfill. Executive Faults (EF) reflect those faults related to inappropriate executive measures which are not consistent with protocols and technical guidance. Human Faults (HF) are related to faults by landfill operators and employees due to either intentional/unintentional misconduct or negligence. Environmental Condition Faults (ECE) are natural-based issues such as inclement weather conditions.

Based on the information collected from the above sources, the fault tree for all possible LFI is constructed for this study as shown in Figure 2 including 22 intermediate events and 38 basic events with the details given in Table 1. Although great care was provided for creating a comprehensive structure for the LFI based on the most possible events that can apply for any types of landfills, the fault tree structure can be adjusted (i.e. either expanded to include more events or shortened to remove some events) based on the conditions that are either likely or unlikely to happen for any specific study area.

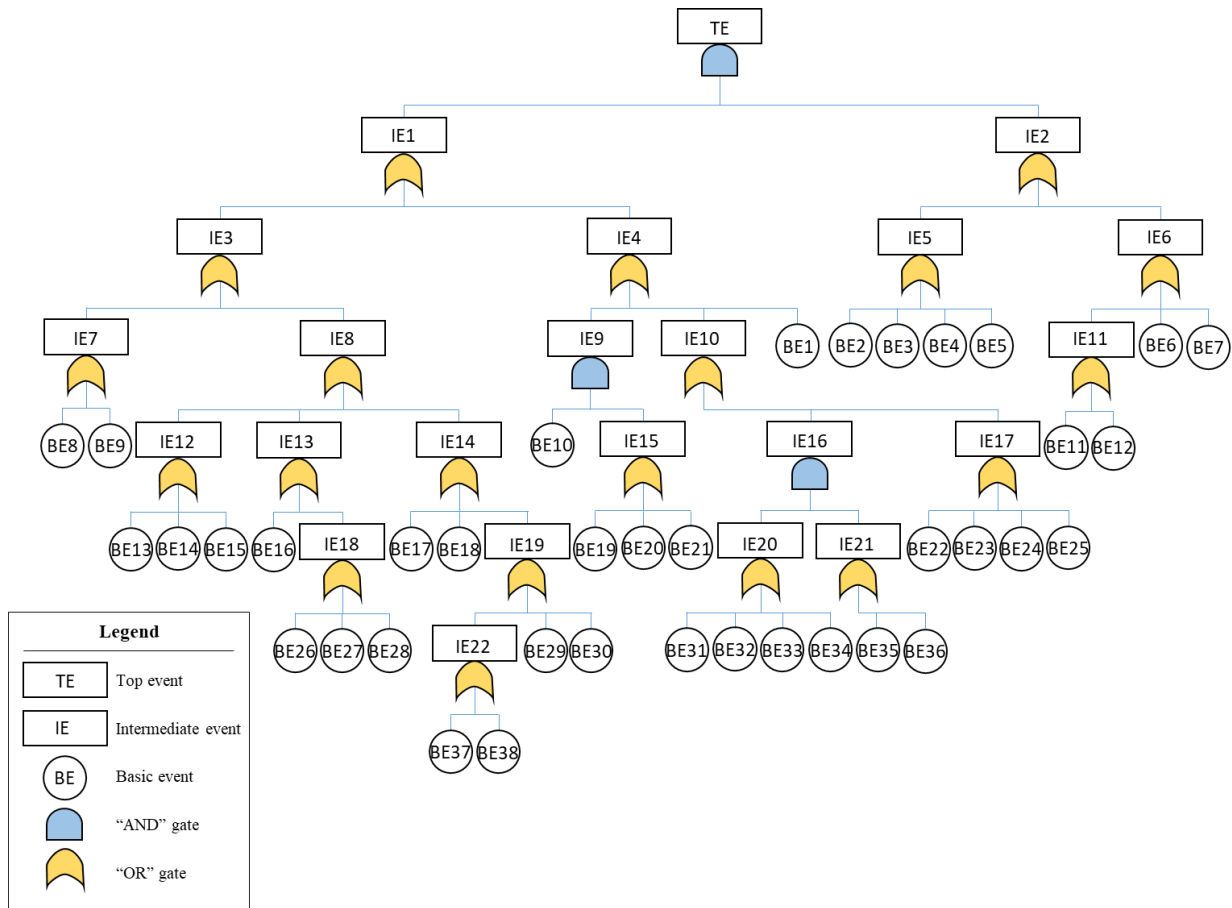

**Figure 2. The fault tree structure proposed for the LFI**

**Table 1. Identified events for the fault tree of the LFI**

Code	Description	Identification method				Type of fault	References
		SV <sup>a</sup>	LR <sup>b</sup>	OD <sup>c</sup>	EJ <sup>d</sup>		
TE	Major fire in landfill with difficult control					MX*	
IE1	Fire occurrence		•			MX	FEMA (2002)
IE2	Lack of preparation for controlling fire				•	MX	Proposed
IE3	Subsurface fire		•			MX	Jafari <i>et al.</i> (2017a)
IE4	Surface fire		•			MX	Dokas <i>et al.</i> (2009)
BE1	Deliberate arson fire		•			MF <sup>1</sup>	FEMA (2002)
IE5	Problem with firefighting operation			•		MX	EPA (2008)
BE2	Incomplete extinguishing operation and rekindling a fire from the previous fire		•			EF <sup>2</sup>	Ibrahim (2020)
BE3	Being in an inclement weather condition (e.g., extremely hot, cold or windy weather)	•				ECF <sup>3</sup>	Proposed
BE4	Negligence and delayed notification to the fire department by operator			•		HF <sup>4</sup>	Sperling (2002a)
BE5	The late arrival of the fire service				•	HF	Proposed
IE6	Problem with fire suppression equipment			•		MF	Sperling (2002b)
BE6	Lack of sufficient personal protective equipment for personnel to participate in firefighting operations	•				MF	Proposed
BE7	Lack of sufficient firefighting equipment on site			•		MF	USFA (2002)
IE7	Increasing the moisture content of landfill		•			EF	Jafari <i>et al.</i> (2017b)
BE8	Poorly design leachate-recirculation system		•			EF	Feng <i>et al.</i> (2018)
BE9	Poorly maintenance of the cap in the condition of heavy rain	•				EF	Proposed
IE8	The air intrusion into the landfill mass		•			MX	Reinhart <i>et al.</i> (2020)
IE9	Spontaneous fire		•			MX	Moqbel and Reinhart, (2017)
BE10	Poorly cover condition in shallow areas				•	EF	Proposed
IE10	Accidental fire			•		MX	BSLI (2014)
IE11	Problems with heavy equipment			•		MF	USFA (2002)
BE11	Problem with the manoeuvrability of the heavy equipment	•				MF	Proposed
BE12	Lack of access to require heavy equipment				•	MF	Proposed
IE12	Problems with the gas collection system		•			EF	Jafari (2015)
BE13	Applying an excessive vacuum in the gas collection system		•			EF	FEMA (2002)
BE14	Damaged gas wells		•			EF	Jafari (2015)
BE15	Abandoned open outlets of gas wells			•		EF	LMOP (2002)
IE13	Existence of voids within the waste mass		•			EF	Hall <i>et al.</i> (2007)
BE16	Inadequate interim covers	•				EF	Proposed
IE14	Problems with cap			•		MX	Sperling (2002a)

Code	Description	Identification method				Type of fault	References
		SV <sup>a</sup>	LR <sup>b</sup>	OD <sup>c</sup>	EJ <sup>d</sup>		
BE17	Poorly engineered cap especially on the side slope		•			EF	Jafari <i>et al.</i> (2017a)
BE18	Weak interconnection between caps on two wastes deposits cells				•	EF	Proposed
IE15	Formation of shallow hot spots		•			ECF	Moqbel <i>et al.</i> (2010)
BE19	Heat generation because of remaining waste in aerobic degradation phase		•			ECF	Bates (2004)
BE20	Heating from the sun during summer months	•				ECF	Proposed
BE21	Heating from exothermic reactions of chemical substances in contact with water		•			ECF	Ibrahim, (2020)
IE16	Surface catching fire			•		MX	USFA (2002)
IE17	Operational errors			•		EF	UN DESA (2018)
BE22	Deliberate fire by landfill operators to reduce the volume of waste	•				EF	Proposed
BE23	Uncontrolled dumping of reactive and flammable hazardous waste				•	EF	Proposed
BE24	Uncontrolled dumping of incompatible chemicals next to each other, which can ignite when mixed		•			EF	Martin <i>et al.</i> (2013)
BE25	Burial of hot or undetected smouldering loads (.e.g. melting slag or ash)		•			EF	Stark <i>et al.</i> (2012)
IE18	Poorly compacted waste		•			EF	Chavan <i>et al.</i> (2019)
BE26	Improper waste placement				•	EF	Proposed
BE27	Inconsistency between the weight of compactor and incoming waste				•	EF	Proposed
BE28	Inadequate number of passages of compactor	•				EF	Proposed
IE19	Existence of fissures and cracks in the soil cover		•			MX	Chavan <i>et al.</i> (2019)
BE29	Settlement of waste surface		•			ECF	Idowu <i>et al.</i> (2019)
BE30	Landslide of slopes			•		EF	EPA (2008)
IE20	Existence of pilot ignition source			•		HF	USFA (2002)
BE31	Sparks from vehicles using the landfill		•			HF	Bates, (2004)
BE32	Discarding lit matches and cigarettes in landfill	•				HF	Proposed
BE33	Contact of hot parts of opening equipment with waste				•	HF	Proposed
BE34	Using the welding or electrical equipment on site			•		HF	USFA (2002)
IE21	Existence of exposed combustible material		•			EF	Moqbel <i>et al.</i> (2010)
BE35	Uncapped layers of waste in the working face		•			EF	Bates (2004)
BE36	Methane gas leaking from the header pipes of the landfill gas collection system			•		EF	Administration (2002)
IE22	Poorly maintenance of the cap in all weather conditions		•			ECF	Moqbel (2009)
BE37	Cap erosion after heavy rain		•			ECF	Koelsch <i>et al.</i> (2005)
BE38	Cap problem in windy weather condition	•				ECF	Proposed

\*: Mixed e.g., event that consists of different types of faults in their sub level

a: Site Visit

b: Literature Review

c: Official Documents

d: Experts Judgement

1: Managerial Fault

2: Executive Fault

3: Environmental Condition Fault

4: Human Fault

## 2.2 Development of FFTA

The fuzzy set theory is incorporated in the FTA technique, creating the FFTA, in order to eliminate the above-mentioned limitations and improve fault tree applications in an uncertain situation with imprecise and vague failure data (Yazdi and Kabir, 2017). FFTA is developed through two steps of failure possibility and failure probability of BEs as outlined below.

### 2.2.1 Failure possibility of BEs


Possibility for an event is expressed subjectively in a qualitative manner while probability is usually expressed by using statistical indicators that can be calculated as a numeric ratio defining the rate of event occurrence. In cases of lack of statical data, instead of failure probabilities, failure possibilities can be extracted in a subjective state by using the experts' judgement and fuzzy set theory. These possibilities are then quantified and turn into failure probability rates in order to perform the quantitative analysis in the fault tree. Hence, failure possibility in the fuzzy environment is generated through three steps of (a) fuzzification, (b) aggregation, and (c) defuzzification that are defined below in detail.

#### 2.2.1.1 Fuzzification

Failure possibilities of BEs in the LFI are specified here by the judgement of a number of experts using five linguistic terms (i.e. very high, high, medium, low and very low) given in Figure 3a. These qualitative expressions are mapped to corresponding quantitative fuzzy numbers by using different forms of fuzzy membership functions such as triangular, trapezoidal, and Gaussian-shape (Ardeshir et al., 2017). Triangular fuzzy membership functions are adopted here for the five linguistic terms as shown in Figure 3 for fuzzy numbers ranging between 0 and 1 with their graphical representation (Piadeh et al., 2018a). It should be noted that the triangular fuzzy number is widely used as it can be intuitively envisaged better by decision-makers and is easy to apply. Hence, the triangular shape can simply reflect the dispersion of the evaluation data and point to the highest possible failure of the LFI (Mahmood et al., 2013).

Possibility of occurrence in form of linguistic terms	Symbol	Possibility of occurrence in form of triangular fuzzy numbers
Very High	VH	(0.8,0.9,1)
High	H	(0.6,0.75,0.9)
Medium	M	(0.3,0.5,0.7)
low	L	(0.1,0.25,0.4)
Very Low	VL	(0,0.1,0.2)

(a)

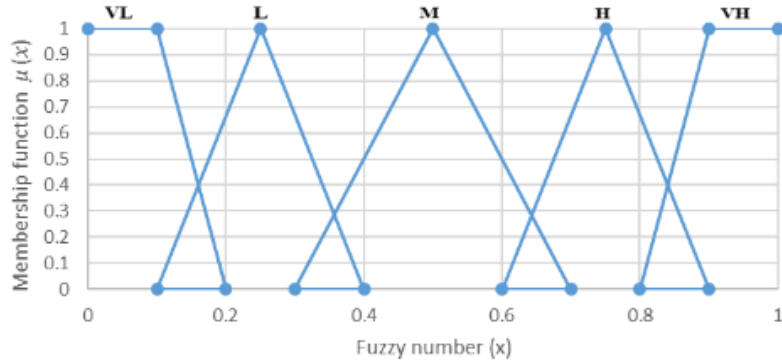

(b)

**Figure 3. (a) Triangular fuzzy numbers for five linguistic terms and (b) graphical representation of the corresponding triangular membership functions**

#### 2.2.1.2 Aggregation

Different fuzzy numbers of each BE are aggregated into one single fuzzy number in order to reach a consensus between experts' opinions. Several aggregation techniques are available such as fuzzy Delphi method, max and min Delphi method, similarly aggregation, voting, linear opinion pool, game theory, max-product, and sum-product (Mahmood *et al.*, 2013). However, there is no specific priority suggested by the literature for their application (Liu *et al.*, 2014). Hence, to combine the judgements of different experts with specific knowledge and experience, the aggregated fuzzy number (AFN) for BE  $i$  suggested by Clemen and Winkler (1999) is used here that can be calculated for each BE as below:

$$AFN_i = \sum_{j=1}^n W_j A_{ij} \quad (i = 1, 2, 3, \dots, m) \quad (1)$$

where  $W_j$  is the relative weight of expert  $j$  and  $A_{ij}$  is the opinion of expert  $j$  as a fuzzy number about the possibility of occurrence for  $BE_i$  in the LFI, and  $m$  is the number of BEs and  $n$  is the number of experts.

The relative weight for each expert is calculated based on their personal characteristics i.e. educational degree, professional experience and job positions as given in Table 2 in this study (Piadeh et. Al, 2018b). Thus, the relative weight ( $W_j$ ) for expert  $j$  is calculated as below.

$$W_j = \frac{S_j}{\sum_{j=1}^n S_j} \quad (2)$$

where  $S_j$  is the sum of all weighting scores for expert  $j$  and  $n$  is the number of experts.

### 2.2.1.3 Defuzzification

The outcome of the aggregation process is the possibility of BEs as fuzzy numbers. These fuzzy numbers need to be converted into a single crisp value for each BE indicating the most likely score that an event may occur (Ahmadi et al., 2017). The centre of area method proposed by Sugeno (1999) is used here for the defuzzification. If  $A = (a, b, c)$  is aggregated triangular fuzzy number of  $BE_i$ ,  $CFP_i$  can be defuzzified as below:

$$CFP_i = \frac{\int x \mu_A(x) dx}{\int \mu_A(x) dx} = \frac{\int_a^{bx-a} \frac{bx-a}{b-a} x dx + \int_{bx-a}^{cc-x} \frac{cc-x}{c-b} x dx}{\int_a^{bx-a} \frac{bx-a}{b-a} dx + \int_{bx-a}^{cc-x} \frac{cc-x}{c-b} dx} = \frac{1}{3} (a + b + c) \quad (3)$$

where  $CFP_i$  is the crisp failure possibility of  $BE_i$ .

### 2.2.2 Failure probability of BEs

The crisp failure possibility (CFP) generated above needs to transfer to failure probability (FP) to be used for fault tree quantitative analysis. The following conversion function introduced by Onisawa (1990) is used here.

$$FP_i = \begin{cases} \frac{1}{10^{K_i}}, & CFP_i \neq 0 \\ 0, & CFP_i = 0 \end{cases}, \quad K_i = \left[ \left( \frac{1-CFP_i}{CFP_i} \right)^{1/3} \right] \times 2.301 \quad (4)$$

where  $FP_i$  represents the failure probability of  $BE_i$ .



## 1    **2.3    Comprehensive fault tree analysis**

2    Once the fault tree of the LFI is created, it can be analysed both qualitatively and quantitatively.  
3    qualitative analysis interprets the events' cause and consequence relationships and extracts the  
4    combinations of events leading to the TE. Quantitative analysis uses BEs' failure probability rates as  
5    input to provide valuable numerical results such as EI and TE failure probability and events importance  
6    degree by sensitivity analysis. Further details of these two FTA approaches are described below.

### 7    **2.4.1. Qualitative analysis**

8    Quantitative analysis is a non-numerical, subjective analysis that identifies all the combinations of  
9    events leading to the TE called "Cut Sets". When a cut set has many events, it is less likely to fail all  
10   of them than one with fewer events. Thus, among all cut sets, their minimal ones, called "Minimal  
11   Cut Sets" (MCSs), which contain too few events are more important combinations that may indicate  
12   a system vulnerability. MCSs are defined as the smallest combination of events that are minimal,  
13   necessary, and sufficient to cause the system to fail. For the MCS of order  $n$ , the top event will occur  
14   by the failure of  $n$  numbers of BEs in the cut set ([Kabir and Papadopoulos, 2018](#)).

### 15   **2.4.2. Quantitative analysis**

16   Fault tree quantitative analysis can compute relevant numerical values including failure probability  
17   values and importance degrees ([Shi et al., 2018](#)). Quantitative analysis determines the system  
18   reliability by computing relevant numerical indexes such as IEs and TE failure probabilities and  
19   identifying critical events through sensitivity analysis. This analysis entails having BEs failure  
20   probabilities. Although the crisp failure data for BEs, directly obtained from the system, are the most  
21   reliable source for fault tree quantitative analysis, it is almost inevitable to work with estimated data  
22   instead of precise data in some real-world engineering practices ([Yazdi et al., 2019](#)). This is mainly  
23   due to limitations such as lack of accurate and sufficient statistical records of data, vague behaviour  
24   of basic events (e.g. human-related subjective events), the ambiguous nature of the incidents, and  
25   variation in the system-operating environment ([Yazdi and Kabir, 2017](#)). Hence, the development of

a fault tree in a fuzzy environment is a solution in this situation to overcome these limitations and generate failure probabilities for BEs.

#### 2.4.2.1 Analysis of failure probability values

Failure probabilities of intermediate events with 'AND' or 'OR' gates can be calculated based on failure probabilities of BEs and using Boolean algebra as Equations (5) and (6):

$$P(E_O) = \prod_{i=1}^n P(BE_i) \quad \text{For 'AND' gate} \quad (5)$$

$$P(E_O) = 1 - \prod_{i=1}^n (1 - P(BE_i)) \quad \text{For 'OR' gate} \quad (6)$$

where  $n$  is the number of independent input events,  $P(E_O)$  is the probability of the upper-level event of the gate (e.g. IEs or TE) and  $P(BE_i)$  is the failure probability of lower level event  $i$  of the gate (e.g. BEs or IEs).

The same calculation can be subsequently used for failure probabilities of other upper level IEs until the failure probability of TE is obtained. Comparing the probability values of IEs in different branches of the tree and analysing TE probability value can shed light on the important parts of the incident and be a basis for reliability assessment and any measures to mitigate the overall LFI.

#### 2.4.2.2 Sensitivity analysis

The sensitivity of the FFTA results to variation of input data needs to be analysed to identify importance degree of BEs and critical paths in the fault tree of the major fire in landfill. In fact, if changes in failure probabilities of one particular component, BE, IE, or MCS can drastically change the TE state, the system is extremely sensitive to this component and then this component is defined as critical. Therefore, critical components are the biggest contributors to the result and they can be an ideal candidate for improving system reliability. In addition to the sensitivity analysis of BEs and MCSs, this paper adopts sensitivity analysis based on IEs and several types of BEs faults.

There are different methods to measure BEs' importance degree for finding top contributors to system failure (Vesely, 2002). Here, the Fussell-Vesely importance method (FV-I) is adopted to rank critical

1 BEs. This method prioritises all BEs based on their contribution to the occurrence of the top event.

2 The FV-I of a BE can be calculated as:

3 
$$I_{BE_i}^{FV} = \frac{P(TE) - P(TE)^{P(BX_i)=0}}{P(TE)} \quad (7)$$

4 where  $I_{BE_i}^{FV}$  is the importance degree of  $BE_i$ ; and  $P(TE)^{P(BX_i)=0}$  is the occurrence probability of the TE  
5 when the probability of  $BE_i$  is zero. A new sensitivity analysis is conducted here by setting the  
6 probabilities of all BEs associated with a given type of fault equal to zero and then calculating the  
7 probability of TE as:

8 
$$I_{\text{fault of type A}}^{FV} = \frac{P(TE) - P(TE)^{(\text{all BEs of fault type A})=0}}{P(TE)} \quad (8)$$

9 where  $I_{\text{fault of type A}}^{FV}$  is the importance degree of fault type A; and  $P(TE)^{(\text{all BEs of fault type A})=0}$  is the  
10 occurrence probability of the TE when the probability of all BEs of fault type A is zero. It can also  
11 help to identify the type of BEs fault with the greatest impact on the occurrence of TE. Identifying  
12 the critical type of BEs fault provides a major step to prevent the TE occurrence because it involves  
13 a group of a certain number of BEs in all different tree branches.

14 The sensitivity analysis of IEs similar to BEs are prioritised based on their contribution to TE  
15 occurrence and can be calculated as.

16 
$$I_{IE_i}^{FV} = \frac{P(TE) - P(TE)^{P(IE_i)=0}}{P(TE)} \quad (9)$$

17 where  $I_{IE_i}^{FV}$  is the importance degree of  $IE_i$ ; and  $P(TE)^{P(IE_i)=0}$  is the occurrence probability of the TE  
18 when the probability of  $IE_i$  is zero.

19 The critical path can be identified by comparing the importance degrees of IEs at each level of all  
20 branches to find the critical ones at each level, then connecting them in each particular branch to  
21 finally reach the TE. These paths indicate critical consecutive cause-consequence events from the  
22 bottom to the top of the fault tree.


The importance analysis for MCS identifies the most critical combination that leads to the occurrence of TE. MCS ranking is performed by calculating the ratio of MSC probability to the top event probability. This relative measure called the cut set importance (CSI) or Fussell-Vesely Importance (FV-I) (Lavasani *et al.*, 2015) is calculated as.

$$I_j^{CS} = P(MCS_j)/P(TE) \quad (10)$$

where  $P(MCS_j)$  is the failure probability of  $MCS_j$ ,  $P(TE)$  is the failure probability of TE and  $I_j^{CS}$  is measured importance degree of  $MCS_j$ .

### 3 Case study

The proposed framework is demonstrated by its application to a real case study of a landfill located in Qazvin city, Iran, as shown in Figure 4. The city is surrounded by many industrial towns and hence receives several types of chemical, pharmaceutical, and mainly industrial waste. The capacity of the landfill is 150,000 m<sup>3</sup> in total for the waste and daily/interim covers. With an almost annual loading of around 1,000 tons/year, this site has three closed industrial landfills and one in operation. This landfill site has experienced five major fires from 2015 to 2020, which spread through almost 70- 100 tons of industrial waste and entailed an arduous firefighting operation (ISIPO, 2020).

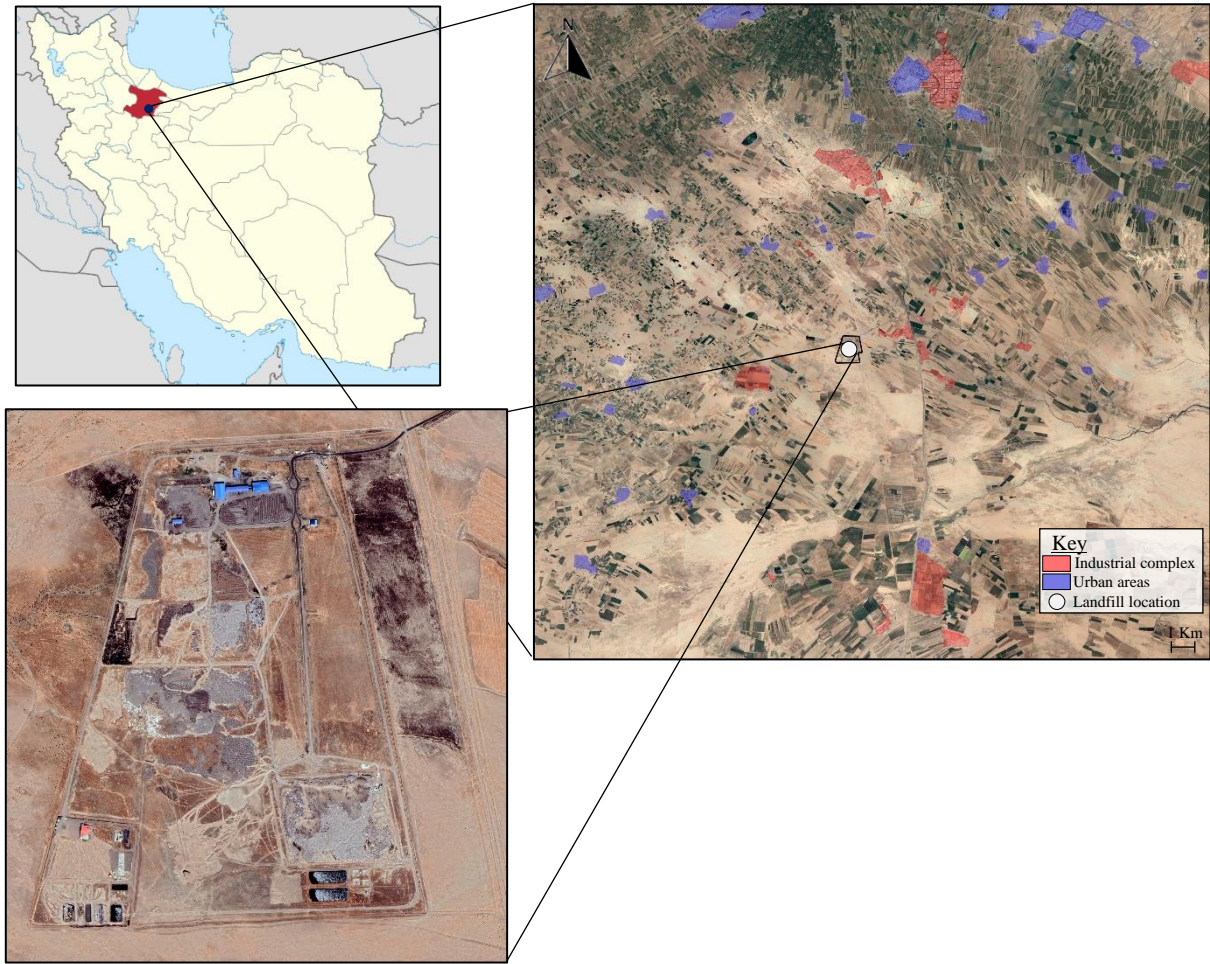

**Figure 4. Layout of the case study's landfill**

The fault tree and the framework developed for analysis in the case study are described here. First, all basic events listed in Table 1 are first reviewed for the case study. Among all, BEs #8, #13, and #36 are discarded due to the lack of a leachate circulation and gas collection system in the case study. Additionally, BEs #22, #27, and #28 are also discarded due to not being applicable of 'deliberate fire by landfill operators' and 'compactor' in the case study. By applying Boolean algebraic rules, the fault tree of the case study has 176 MCS, indicating that there are 176 paths to result in fire occurrence in this landfill. The total 176 MCSs include 56 MCSs of order 3 and 120 MCSs of order 2. The MCSs equation can be expressed as below:

$$\begin{aligned}
1 \quad T = MCS_1 + MCS_2 + \dots + MCS_N = & \left( \sum_i X_i (X_1 + X_9 + X_{26} + \sum_k X_k + \sum_l X_l + \sum_m X_m + \sum_n X_n) + \right. \\
2 \quad & \left. \sum_j X_j (X_1 + X_9 + X_{26} + \sum_k X_k + \sum_l X_l + \sum_m X_m + \sum_n X_n) \right) + \left( \sum_i X_i (\sum_p X_p X_{10} + \sum_q X_q X_{35}) + \right. \\
3 \quad & \left. \sum_j X_j (\sum_p X_p X_{10} + \sum_q X_q X_{35}) \right) \quad (11)
\end{aligned}$$

4 where N is the serial number of MCS which is  $1 \leq N \leq 176$ ; X represents BE;  $2 \leq i \leq 7$ ;  $11 \leq j \leq$   
5  $12$ ;  $14 \leq k \leq 18$ ;  $23 \leq l \leq 25$ ;  $29 \leq m \leq 30$ ;  $37 \leq n \leq 38$ ;  $19 \leq p \leq 21$ ;  $31 \leq q \leq 34$ .

6 This indicates that there are 176 short ways, by combination just 2 or 3 events, resulting in landfill  
7 fire incidents in the case study. Therefore, it is necessary to identify the critical ones among these 176  
8 MCSs through sensitivity analysis in the quantitative realm to focus on the important part. A fuzzy  
9 FTA based on experts' judgement is adopted here due to lack of access to statistical failure data. The  
10 five fuzzy membership functions presented in Figure 3 are used here with corresponding triangular  
11 membership functions for experts' judgements. Experts used for judging the BEs are selected from  
12 various levels of job position, professional experience (number of years in service), educational  
13 degree to have a better diversity of opinions from all groups working in this sector (Piadeh *et al.*,  
14 2018a). Hence, six experts from three fields were first selected as follows: two from those involved  
15 in the firefighting operations of the landfill, two from planning and management team, and two from  
16 the operation team. The six experts from all the available pool of experts attended the interview but  
17 they were fully aware of the case study and had detailed information about the historic landfill fires  
18 occurred at the site. Judgements of these six individual experts for each BE are combined based on  
19 Eqs. (1) and (2) to form a single failure probability for each BE by using the relative weights of  
20 experts calculated based on the scores criteria given in Table 2 related to three specifications of the  
21 experts as suggested by Piadeh *et al.* (2018b).

22

1 **Table 2. Score of experts for job position, duration of professional experience and educational degree**

Classification			Score
Job position	Professional experience (years in service)	Educational degree	
Professor / Chief Engineer / Director	more than 20	PhD	5
Associated professor / Manager	15 to 20	Master's (MSc)	4
Engineer, supervisors	10 to 15	Bachelor's (BSc)	3
Foreman, Technician	5 to 10	HND	2
Operator, Workers	<5	Secondary School	1

## 2 **4 Results and discussion**

3 The methodology outlined above is applied here for the reliability assessment of the LFI of the case  
 4 study in Iran. First, the relative weights of the six experts participated in the interview is calculated  
 5 based on the scores given in Table 2 related to three types of specifications as details shown in Table  
 6 A1 of Appendix A. Note that the details of the direct interview collecting from the experts' judgements  
 7 for the occurrence possibility of BEs of the LFI are shown in Table A2 of Appendix A.

8 Note that the AFN is obtained from Eqs. (1) and (2) based on applying the method of linear opinion  
 9 pool. The defuzzification of the AFN is performed by using Eq. (3) to convert fuzzy numbers into  
 10 crisp failure possibility (CFP) for each BE. Finally, Eq. (4) is used to transform CFP into the failure  
 11 probability (FP) for each BE. The results of the FFTA processes and failure probabilities for each  
 12 BEs are also shown in Table A2 of Appendix A. Figure 5 shows the results of the top ten BEs of the  
 13 LFI with the highest failure probability in the case study. The results indicate BE23 "Uncontrolled  
 14 dumping of reactive and flammable hazardous waste" is the basic event with the highest failure  
 15 probability occurrence amongst others. Furthermore, exploring the type of fault shows while in  
 16 general "Human Faults" seem to be the major basic events for many LFI, frequency analysis of the  
 17 incidents in the study reveals that "Executive Faults" appear more in the top 10 identified basic events  
 18 with the highest probability failure.

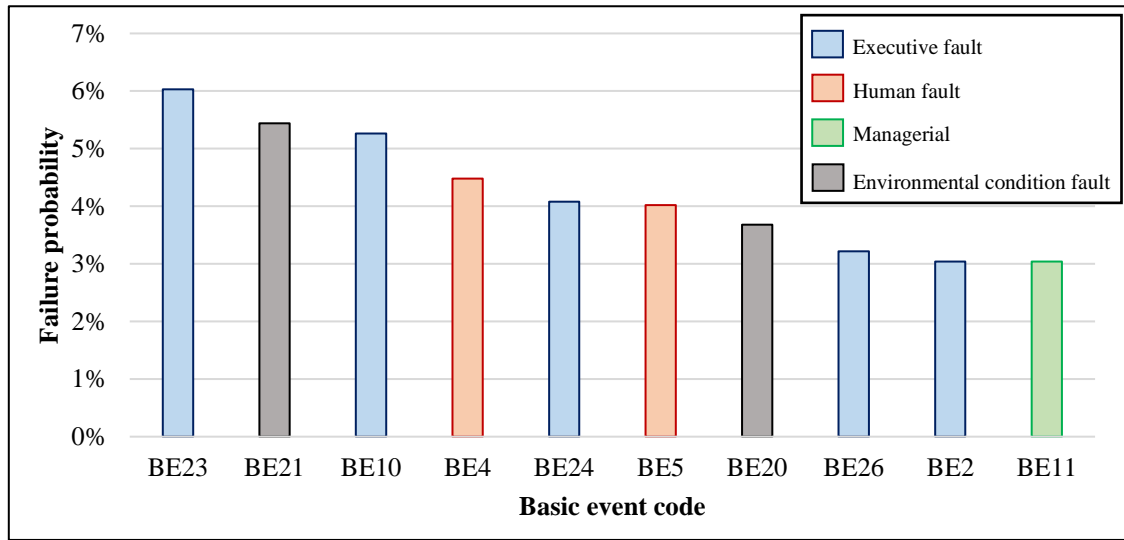



Figure 5. Top ten identified basic events with highest probability failure

#### 4.1 Failure probability analysis

Figure 6 shows the results of the failure probability of the TE (i.e. Major fire in landfill with difficult control) and two top-level IEs i.e. IE1 (fire occurrence) and IE2 (lack of preparation for fire control) are calculated based on Eqs. (5) and (6). The two top-level IEs are shown here as they are directly connected to the TE by using a "AND" gate and are the head of the main branches in the tree for lower level events and hence their analysis related to the failure probabilities can be useful to understand the major causes of the LFI. As can be seen, it is evident that the probability of a major fire incident in the case study (i.e. TE) is quite low i.e. 5.51% although the probability of occurrence for both i.e. IE1 "fire occurrence" (25.4%) and IE2 "Lack of preparation for controlling fire" (21.7%) are both significantly higher than the TE (5.51%). This is due to the fact that the two IEs are required to occur simultaneously to have the occurrence of the TE and hence a multiplication of the failure probabilities for these two IEs would form the failure probability of major landfill fire. Additionally, the likelihood of surface fire is slightly more than subsurface fire in the landfill. In general, this is consistent with previous findings for landfill fire that indicates surface fire are more common in comparison to subsurface fires (Ibrahim, 2020). However, the importance of an event is based on its impact on the TE failure probability and not necessarily the failure probability of itself. The result of



1 a sensitivity analysis for intermediate events is presented in the next section to determine whether the  
 2 surface fire is more critical than subsurface fire.

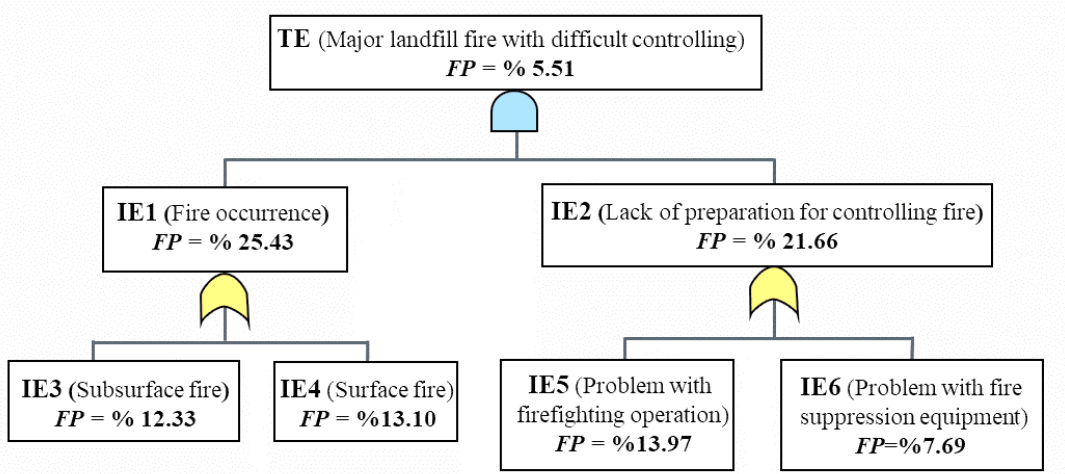


3  
 4 **Figure 6. Failure probability of the top event and two top-levels of intermediate events**

5  
 6 **4.2 Sensitivity analysis**

7 After calculating the TE failure probability, the importance degree of BEs is calculated by using the  
 8 Fussell-Vesely importance method (FV-I) in Eq. (7) and presented in Tables B1 of Appendix B.  
 9 Figure 7 also shows the importance degree of BEs ranked in descending order with corresponding  
 10 failure probabilities for the landfill fire in the case study. The results show a relatively high direct  
 11 correlation between the failure probabilities and importance degrees for the first 16 BEs. However, a  
 12 few spikes for those ranked in the lower half of the list (i.e. BE10, BE21 and BE20) show  
 13 inconsistency between these two indicators. More specifically, although failure probabilities of these  
 14 BEs are quite high, their importance degrees are negligible compared to their failure probabilities.  
 15 For example, BE21 “Heating from exothermic reactions of chemical substances in contact with  
 16 water” and BE10 “Poorly cover condition in shallow areas” that are ranked the second and third BE  
 17 with the highest failure probability are not amongst the top 15 BEs with highest importance degree.  
 18 This indicates that regardless of their high failure probability rate, their impacts on the failure  
 19 probability of TE can be negligible through the fault tree roots and in relation to other events. This  
 20 result also demonstrates the fact that the high failure probability is not enough to consider an event

1 as an important one and sensitivity analysis should be applied to reveal their actual critical ones. In  
2 addition, some BEs such as BE19, BE35 and BE32 have decent failure probability while their  
3 importance degrees are quite trivial that can be ignored when planning for any mitigation strategies.  
4 It is also evident that BE23 "Uncontrolled dumping of reactive and flammable hazardous waste" has  
5 the highest rate for both failure probability and importance degree which indicate the importance of  
6 this event that required an urgent mitigation measure.

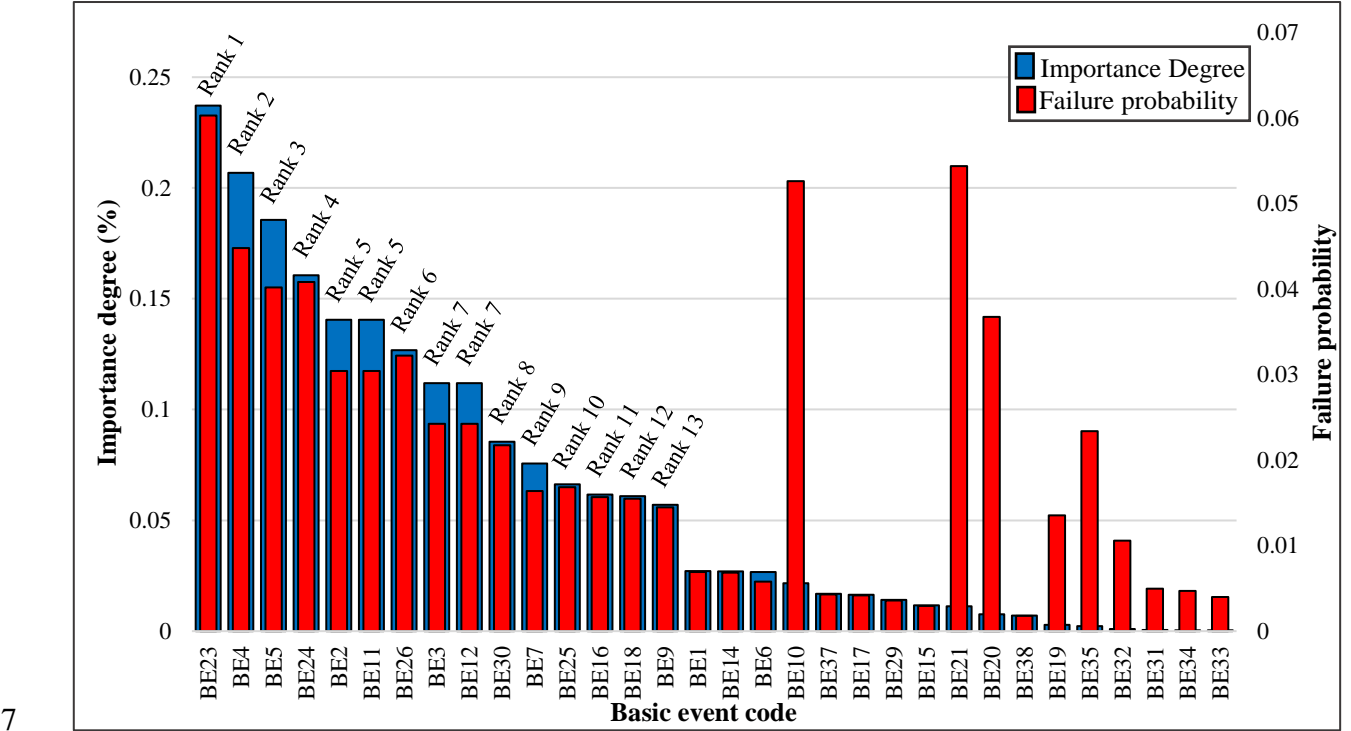

8 **Figure 7. The importance degree and failure probability of BEs for landfill fire in the case study**

9 Moreover, Table 3 presents the results of the sensitivity analysis for the ranking of the type of fault  
10 in BEs by using Eq. (8). Based on this ranking, the most critical types of fault can also be identified  
11 that can be followed by some recommendations and priorities for mitigation measures required for  
12 preventing fire in the future. As can be seen, executive fault (EF) is the most critical type of fault with  
13 the highest importance degree with a significant difference with other types of fault. This also  
14 indicates the high demand for critically reviewing and inspecting execution processes and technical  
15 documents in the site and checking with operators' functions against technical criteria. Human fault  
16 (HF) and managerial fault (MF) are placed in the next ranks with a relatively similar importance


degree that can be considered at the same importance level for this site. Finally, environmental condition fault (ECF) is the lowest rank, and in general, due to the nature of this type of fault, they cannot be entirely eliminated and can only be undermined by some actions (for example, occurring heavy rain and performing immediate attempts to enhance cover condition on cap). In addition to ranking the type of fault in BEs, Table 3 also shows the critical BE related to each type of fault based on its importance degree and recommends several basic corrective actions. It is vital for decision makers to perform corrective actions for these BEs to reduce the TE occurrence probability in the case study.

The importance degree of IEs can also be determined to identify critical paths in the fault tree. The importance degrees are calculated for 22 IEs by Eq. (9) and presented in Tables B2 of Appendix B. In order to identify the critical paths of the LFI in the FTA, the importance degree of IEs for each step of the tree for all branches can be compared together. In this case study, identification of the basic events is extended to seven steps as shown in Figure 8a. According to the ranking of IEs in each step based on the importance degrees shown in Table B2, four main critical paths can be identified and highlighted in the fault tree as shown in Figure 8a. The first critical path (pink route) is for the branch related to the preparation for fire control. IE2 "Lack of preparation for controlling fire" and IE5 "Problem with firefighting operation" on this route show that the failure to successfully operate firefighting on time is the main reason that forms the first critical route leads to the major landfill fire in the site. Therefore, a priority should be given to this combination for developing plans for improvement of fire-fighting operations such as equipping an early detection by using fire detection technology or by planning shift schedules to have constant monitoring of the site by responsible operators, even during non-business hours; separating burning or smouldering loads from the rest of the waste bulk to prevent heading fire towards other cells; and carefully excavating and digging out the layers of burning or smouldering area for preventing from rekindled fire.


1 **Table 3. The ranking of the type of fault in BEs for the LFI in the case study**

<b>Fault type</b>	$I_{fault\ of\ type\ A}^{FV}$	<b>Ranking</b>	<b>Critical BEs in fault</b>	<b>Recommended several basic corrective actions</b>
EF	0.94399	1	BE23 (Uncontrolled dumping of reactive and flammable hazardous waste)	Providing labels for incoming waste include information about the material content, handling instruction, storage requirements, and disposal directions
HF	0.39386	2	BE4 (Negligence and delayed notification to the fire department by operator)	Using fire detection technology to provide early detection; Establishing shift schedules for continuous monitoring of the site, even during non-business hours;
MF	0.37246	3	BE11 (Problem with the manoeuvrability of the heavy equipment)	Planning equipment pathway by plotting the access point, the routs, and the proper movement and manoeuvres; Providing appropriate illuminate level of lighting based on guidelines in case of night time work; Planning to make workers clearly visible to drivers by using the appropriate type of garments; Training workers for being familiar with blind spots around each type of particular heavy equipment that could be used in the site in case of fire.
ECF	0.16491	4	BE3 (Being in an inclement weather condition)	Preparing plans by considering unusual inclement weather conditions in the area ( for example, extremely windy or rainy months); Training workers for being familiar with the best clothing, driving techniques, and appropriate gear specific to the local weather-related safety hazard.

2

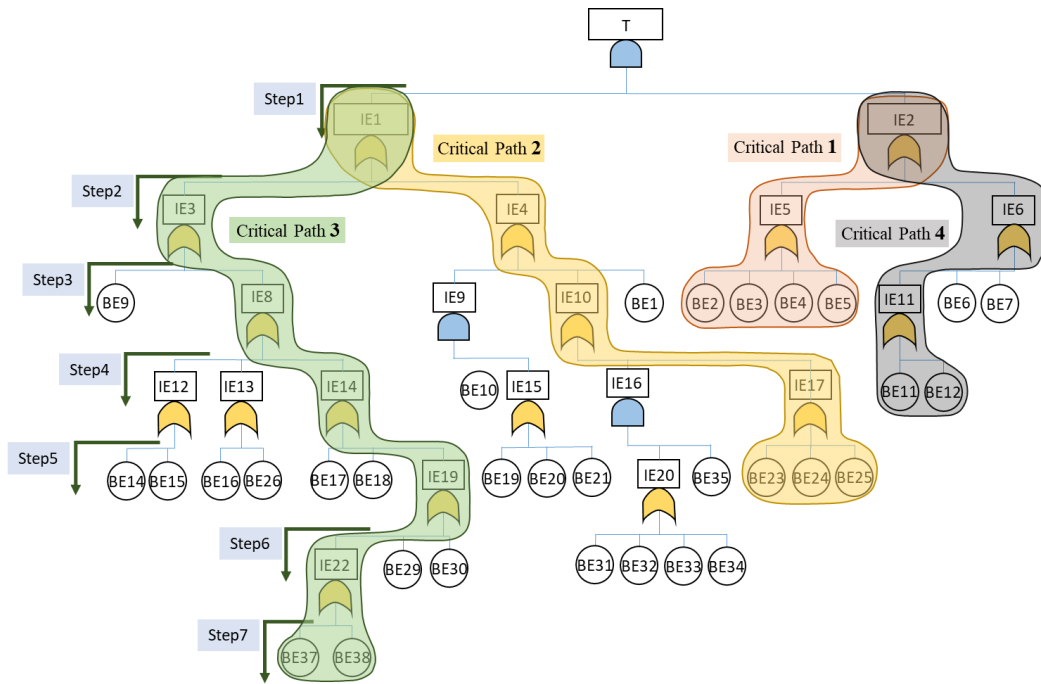

(a)

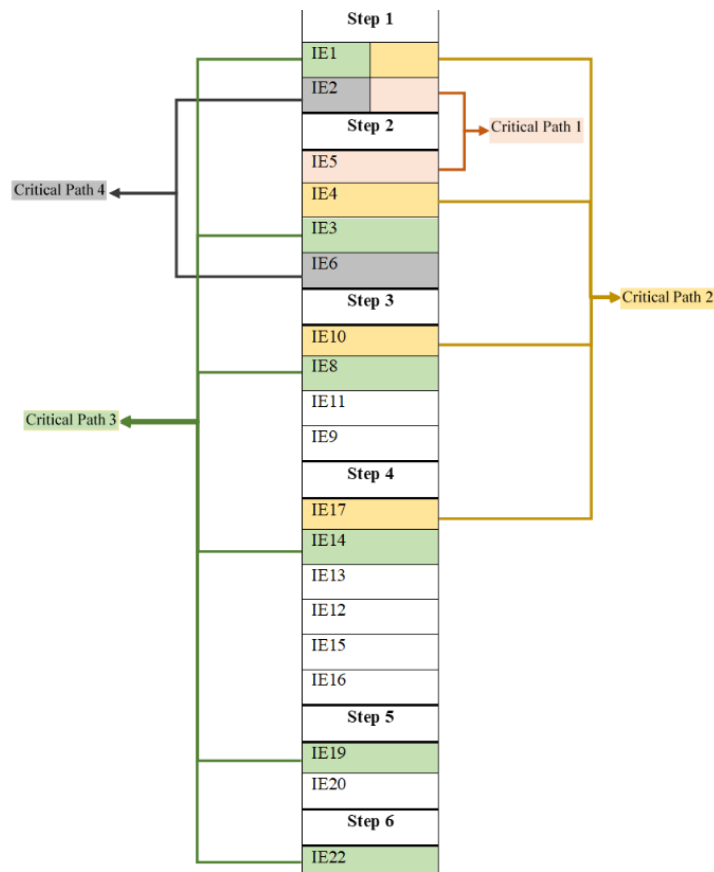


(b)

Figure 8. Critical paths of the fault tree: (a) routes of all critical paths; (b) critical intermediate events in each step

1 The second critical path (orange route) is related to the occurrence of surface fire, which is due to the  
2 accidental fire (IE10) by operational errors (IE17). Therefore, for preventing this critical path in the  
3 site, it is necessary to provide up-to-date documents of technical guidance for landfill operators. In  
4 addition, regular visual inspection by the head of the site should be performed for checking that  
5 landfilling follows based on the technical guidance and regulations. The third critical path (green  
6 route) is through a subsurface fire. Among the reasons leading to this type of fire incident, the air  
7 intrusion into the landfill mass (IE8) because of cap problems (IE14) is the reason to form the critical  
8 path in the fault tree of the case study. The problem of fissures and cracks in the soil cover (IE19) and  
9 poor maintenance of the cap in all weather conditions (IE22) in the site are weaknesses and should  
10 be solved by designing and implementation of daily and final covers with appropriate materials.  
11 Finally, the fourth critical path (grey route) is related to the fire suppression equipment branch. Based  
12 on this path, successful firefighting operations on the site are heavily dependent on how quickly and  
13 easily heavy machinery (bulldozers, excavators, etc.) are accessible and their manoeuvrability on the  
14 site. In addition, this machinery also plays a crucial role in the first critical path for excavating and  
15 separating the burning piles of waste. Designing the site plan, proper lighting of the routes and  
16 providing heavy machinery for the site are the most important points to prevent the occurrence of the  
17 fourth critical path.

18 As described in the case study section, the fault tree in the study contains 176 MCSs. Importance  
19 analysis of MCSs are applied using Eq. (10) and the ranking of the top 32 MCSs with an importance  
20 degree greater than 0.01 is shown in Table B3 of Appendix B. Figure 9 also shows a pie chart for a  
21 schematic representation of the top 19 MCSs accounted for 50% of the total importance degree and  
22 other 157 MCSs accounted for the other half of the importance degree. This indicates that eliminating  
23 the probability of occurrence for only these 19 critical MCSs can significantly reduce the occurrence  
24 probability of major fire in the landfill. Furthermore, the combination of BE23 "Uncontrolled  
25 dumping of reactive and flammable hazardous waste" and BE24 "Uncontrolled dumping of  
26 incompatible chemicals next to each other, which can ignite when mixed" with other events as shown

1 in the figure have a significant contribution to the critical MCSs. This result indicates a large part of  
2 the critical MCSs can be eliminated by only preventing these two events. The prevention plan for this  
3 purpose can be included some mitigation measures such as classifying, stabilising, labelling, and  
4 packaging the incoming loads of hazardous and reactive waste, storing incompatible reactive waste  
5 in a separate cell or sub-cell such a way to avoid mixing with others, mapping cells of waste placement  
6 for potential future actions and defining standard instructions for mixing waste if required.

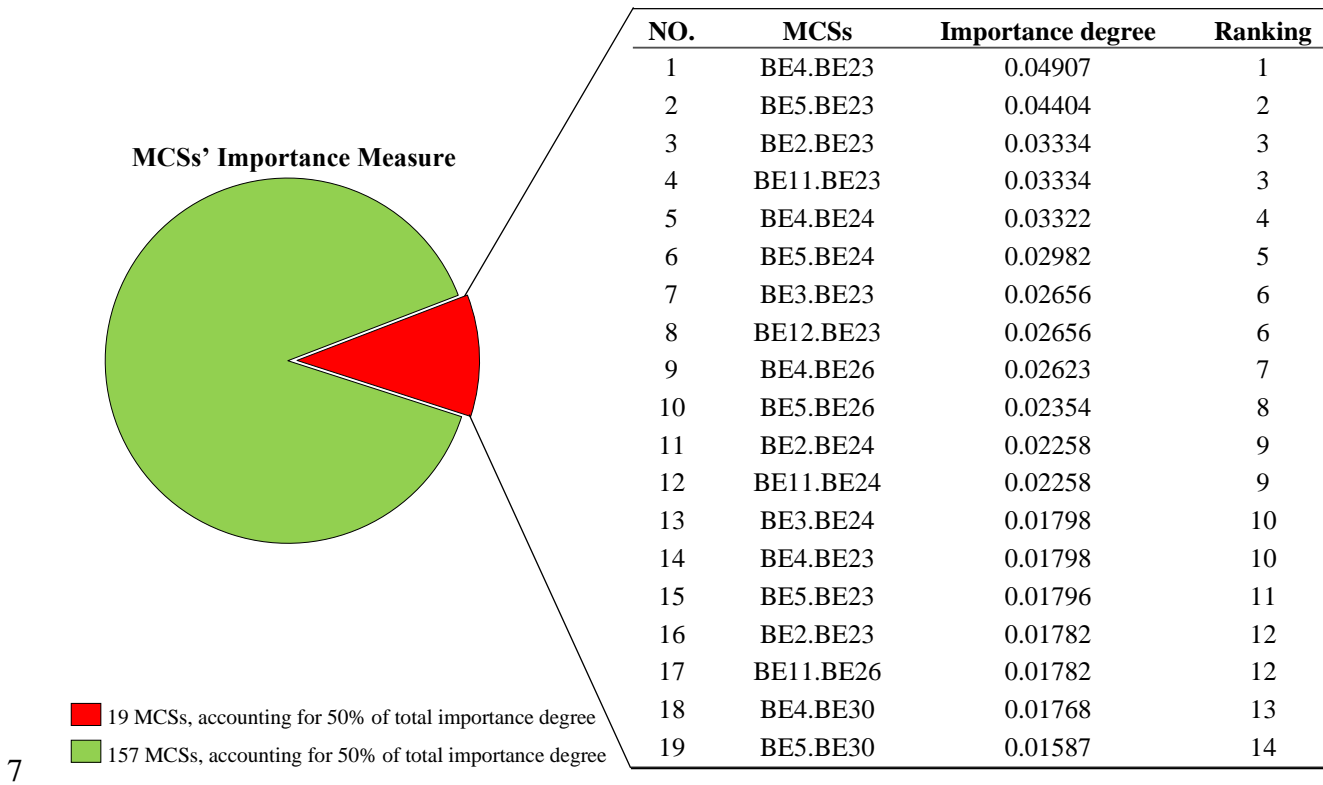

8 **Figure 9. The top 19 MCSs accounting for 50% of the total importance degrees in the landfill fire of the case study**



### 9 **4.3 Impact of experts' relative weight on the FTA results**

10 All the analyses presented above are based on the differences of the experts' relative weight with  
11 respect to their specifications. However, a sensitivity analysis can also be conducted for these weights  
12 to evaluate the impact of the experts' relative weight and, in fact, the role of expertise in the FTA  
13 results. To that end, equal relative weights are considered for experts and relevant BEs' failure  
14 probabilities ( $FP_i'$ ), importance degrees ( $(FV - I)'$ ) and the relative difference of failure probabilities  
15 of BEs between the states of equal and real experts' weights ( $100 \times (|FP_i - FP_i'|) / FP_i$ ) are calculated

1 and presented in Table B4 of Appendix B. Although the failure probabilities in some events change  
2 significantly, the failure probability of the TE is relatively similar. Fig 10 also shows a better visual  
3 comparison of the relative percentage difference and change in rank between failure probabilities of  
4 BEs. The figure also show eliminating the relative weights can cause the failure probabilities for 11  
5 BEs to change over 10%. The highest impacts are for BE17 "Poorly engineered cap especially on the  
6 side slope", BE19 "Heat generation because of remaining waste in aerobic degradation phase", and  
7 BE6 "Lack of sufficient personal protective equipment for personnel to participate in firefighting  
8 operations", respectively. This can demonstrate that experts' judgement for assessing failure  
9 possibilities of these events needs to be scrutinised in more details. Moreover, Fig 10a shows the  
10 average differences in each type of fault for BEs. The low average difference in the type of EF and  
11 ECF fault indicates the fact that experts have the relatively similar view for EF and ECF fault  
12 regardless of their different weights. On the other hand, the high average difference in the type of HF  
13 and MF indicates that experts with various levels of knowledge and experience have distinct insights  
14 into these two types of fault and hence need to coordinate their efforts in order to better understand  
15 human and management fault.

16 Furthermore, Figure 10b shows the change in the rank of BEs according to their importance degree  
17 when applying equal relative weights of experts. Among these BEs, the rank for 4 BEs including BE6  
18 "Lack of sufficient personal protective equipment for personnel to participate in firefighting  
19 operations", BE33 "Contact of hot parts of opening equipment with waste", BE34 "Using the welding  
20 or electrical equipment on-site" and BE38 "Cap problem in windy weather condition" changed up to  
21 4 levels. Generally, it can be concluded that the experts' weighting scores can have impact on the  
22 rank of basic events, and this can result in different prioritisation for any amendment of intervention  
23 strategies. Therefore, all these comparisons indicate that evaluating experts' weight and considering  
24 the impact of their characteristics in their judgements can make a considerable difference in the FTA  
25 results and hence can be impactful when analysing the relevant results.



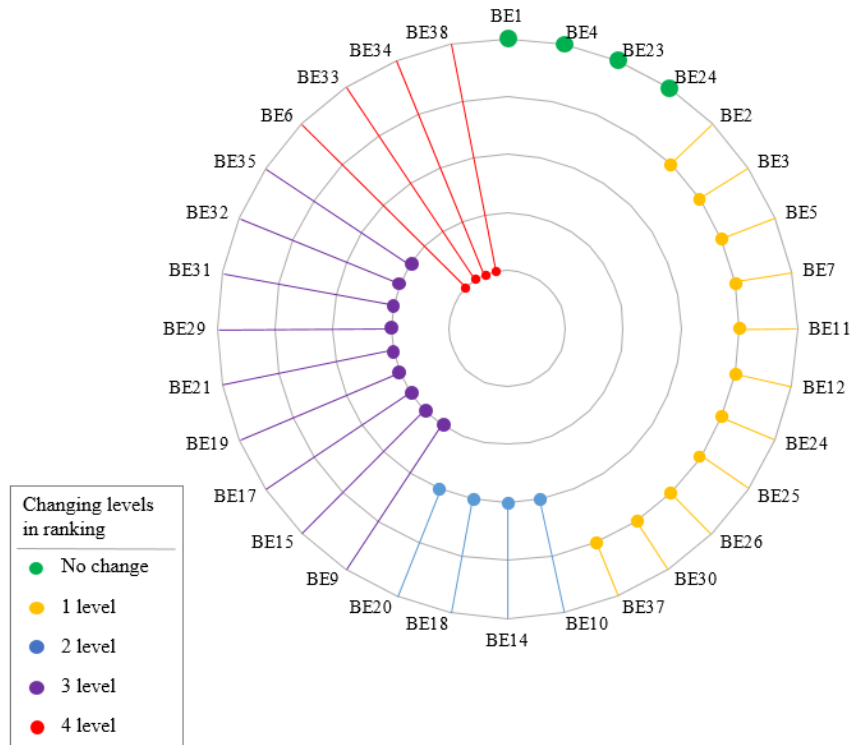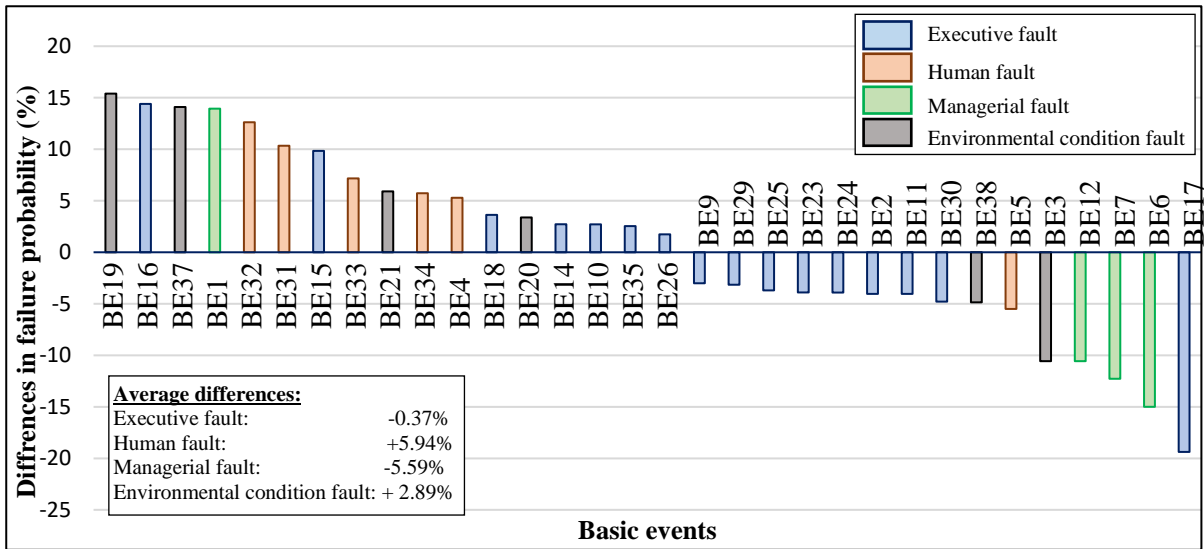

**Figure 10. Impact of experts' relative weight on the FTA results: (a) relative percentage difference of failure probabilities of BEs between the two states of equal and real relative weight of experts; (b) change in the rank of failure probabilities of BEs when using equal relative weights of experts**

## 1    **5    Conclusions**

2    Landfilling is the most widespread method for solid waste management all over the world and fire is  
3    the most frequent problem occurring occasionally in different types of landfills. This study presented  
4    a new framework for assessment of the critical causes for the LFI by using FFTA. The framework  
5    developed a new fault tree for the LFI with the classification of the relevant type of faults for each  
6    event (executive, managerial, environmental conditions, and human). The principal steps of the FFTA  
7    entail developing failure possibility of basic events by using experts' judgement and then generating  
8    probability failure of events to perform a comprehensive qualitative analysis through sensitivity  
9    analysis. The following can be noted from the application of the methodology to a real-world case  
10   study:

- 11   - Although there is a relatively high direct correlation between the failure probability and  
12   importance degree of BEs, some glaring inconsistency between these indicators in some BEs (e.g.  
13   BE21 and BE10) shows the impact of these BEs on the probability of a major fire incident can be  
14   negligible in spite of their high failure probability.
- 15   - The analysis of the IEs' importance degrees identified four main critical paths with relevant events  
16   in the fault tree leading to the major landfill fire in the site. The identified IEs and BEs should be  
17   considered for planning of any intervention strategies to minimise the risk of the LFI.
- 18   - Executive fault is the most critical type of fault in BEs. This reveals high demand for reviewing the  
19   execution processes and technical documents in the site to minimise the impact of relevant BEs on  
20   the probability of a major fire incident.
- 21   - The results reveal that four critical basic events including "Uncontrolled dumping of reactive and  
22   flammable hazardous waste", "Negligence and delayed notification to the fire department by  
23   operator", "The late arrival of the fire service", and "Uncontrolled dumping of incompatible  
24   chemicals next to each other, which can ignite when mixed" have the highest impact on the  
25   probability of a major fire incident.

1 - The sensitivity analysis for the impact of the relative weights of experts on the FFTA results  
2 showed the weights can make a considerable difference up to 15% of change in the failure  
3 probability or up to a 4-level change in the rank of basic events in sensitivity analysis, especially  
4 for those events identified as human or management faults in which the experts' judgements with  
5 different levels of knowledge and experience are quite variable.

6 The failure analyses and subsequent assessment of events presented here are for illustrative purposes  
7 only with the purpose of demonstrating the suggested framework. Although the results identify some  
8 potential critical events that can lead to a major fire incident, further analyses including risk-based or  
9 scenario-based assessment are also recommended to give a more comprehensive solution for practical  
10 decision-making. This work can be further developed based on the risk management cycle to include  
11 risk evaluation, risk treatment, and risk monitoring for the LFI that can be recommended for future  
12 research works. The suggested framework should also be applied for other case studies to evaluate  
13 and verify the performance of the methodology. Finally, the sensitivity analysis can also be extended  
14 for other uncertain parameters of the LFI in the future works to provide robust solutions for failure  
15 probability and importance degrees of the analysed events.

## 17 **6 Acknowledgement**

18 This work is supported by the PhD Scholarship allocated to the second author and the Fellowship  
19 allocated to the third author. The authors wish to acknowledge the PhD Vice Chancellor Scholarship  
20 supported by the University of West London and the Fellowship supported by the Royal Academy of  
21 Engineering under the Leverhulme Trust Research Fellowships scheme. The authors also wish to  
22 thank the two anonymous reviewers for making constructive comments which substantially improved  
23 the quality of the paper.

## 7 References

- Adetona, O., Ozoh, O.B., Oluseyi, T., Uzoegwu, Q., Odei, J. and Lucas, M., 2020. An exploratory evaluation of the potential pulmonary, neurological and other health effects of chronic exposure to emissions from municipal solid waste fires at a large dumpsite in Olusosun, Lagos, Nigeria. *Environmental science and pollution research*, 27(24), pp.30885-30892.
- Aderemi, A.O. and Otitolaju, A.A., 2012. An assessment of landfill fires and their potential health effects-a case study of a municipal solid waste landfill in Lagos, Nigeria. *International Journal of Environmental Protection*, 2(2), pp.22-26.
- Administration, US Fire. 2002. 'Landfill fires: Their magnitude, characteristics, and mitigation'.
- Ahluwalia, I.J. and Patel, U. 2018. Solid waste management in india: an assessment of resource recovery and environmental impact.
- Ahmadi, M., Behzadian, K., Ardeshir, A. and Kapelan, Z., 2017. Comprehensive risk management using fuzzy FMEA and MCDA techniques in highway construction projects. *Journal of Civil Engineering and Management*, 23(2), pp.300-310.
- Ardeshir, A., Mohseni, N., Behzadian, K. and Errington, M., 2014. Selection of a bridge construction site using fuzzy analytical hierarchy process in geographic information system. *Arabian Journal for Science and Engineering*, 39(6), pp.4405-4420.
- Ayyub, B.M., 2001. *Elicitation of expert opinions for uncertainty and risks*. CRC press.
- Baalisampang, T., Abbassi, R., Garaniya, V., Khan, F. and Dadashzadeh, M., 2018. Review and analysis of fire and explosion accidents in maritime transportation. *Ocean Engineering*, 158, pp.350-366.
- Baalisampang, T., Abbassi, R., Garaniya, V., Khan, F. and Dadashzadeh, M., 2019. Modelling an integrated impact of fire, explosion and combustion products during transitional events caused by an accidental release of LNG. *Process Safety and Environmental Protection*, 128, pp.259-272.
- Bates, M., 2004. Managing landfill site fires in Northamptonshire. *SITA-Sustainable Wastes Management Centre, University College Northampton, Northamptonshire, UK*, 63, pp.1635-1641.

1 Bedford, T., Quigley, J. and Walls, L., 2006. Expert elicitation for reliable system design. *Statistical Science*,  
2 pp.428-450.

3 Białowicz, J.S., Rogula-Kozłowska, W. and Krasuski, A., 2021. Contribution of landfill fires to air  
4 pollution—An assessment methodology. *Waste Management*, 125, pp.182-191.

5 BSLI, Bridgeton Sanitary Landfill Information, 2014. (Missouri Department of Natural Resources);  
6 <http://www.dnr.mo.gov/bridgeton/index.html> <retrieved: 17/02/2022>

7 Chavan, D., Lakshmikanthan, P., Mondal, P., Kumar, S. and Kumar, R., 2019. Determination of ignition  
8 temperature of municipal solid waste for understanding surface and sub-surface landfill fire. *Waste  
9 management*, 97, pp.123-130.

10 Clemen, R.T. and Winkler, R.L., 1999. Combining probability distributions from experts in risk  
11 analysis. *Risk analysis*, 19(2), pp.187-203.

12 Cocean, I., Diaconu, M., Cocean, A., Postolachi, C. and Gurlui, S., 2020, June. Landfill Waste Fire  
13 Effects Over Town Areas Under Rainwaters. In *IOP Conference Series: Materials Science and  
14 Engineering* (Vol. 877, No. 1, p. 012048). IOP Publishing.

15 Cooke, R.M., ElSaadany, S. and Huang, X., 2008. On the performance of social network and likelihood-  
16 based expert weighting schemes. *Reliability Engineering & System Safety*, 93(5), pp.745-756.

17 Cornelissen, A.M.G., van den Berg, J., Koops, W.J. and Kaymak, U., 2003. Elicitation of expert knowledge  
18 for fuzzy evaluation of agricultural production systems. *Agriculture, Ecosystems & Environment*,  
19 95(1), pp.1-18.

20 Dadashzadeh, M., Khan, F., Hawboldt, K. and Amyotte, P., 2013. An integrated approach for fire and  
21 explosion consequence modelling. *Fire Safety Journal*, 61, pp.324-337.

22 Dadashzadeh, M., Khan, F., Abbassi, R. and Hawboldt, K., 2014. Combustion products toxicity risk  
23 assessment in an offshore installation. *Process Safety and Environmental Protection*, 92(6), pp.616-  
24 624.

25 Ding, L., Khan, F. and Ji, J., 2020. Risk-based safety measure allocation to prevent and mitigate storage fire  
26 hazards. *Process safety and environmental protection*, 135, pp.282-293.

1 Ding, L., Khan, F., Guo, X. and Ji, J., 2021. A novel approach to reduce fire-induced domino effect risk by  
2 leveraging loading/unloading demands in chemical industrial parks. *Process Safety and*  
3 *Environmental Protection*, 146, pp.610-619.

4 Dokas, I.M., Karras, D.A. and Panagiotakopoulos, D.C., 2009. Fault tree analysis and fuzzy expert systems:  
5 Early warning and emergency response of landfill operations. *Environmental Modelling &*  
6 *Software*, 24(1), pp.8-25.

7 EPA (2008). Republic Signs Agreement with EPA to Address Landfill Problems,  
8 <http://www.epa.gov/region5/sites/countywide/fs200805>, <retrieved: 17/02/2022>.

9 Escobar-Arnanz, J., Mekni, S., Blanco, G., Eljarrat, E., Barceló, D. and Ramos, L., 2018.  
10 Characterization of organic aromatic compounds in soils affected by an uncontrolled tire landfill  
11 fire through the use of comprehensive two-dimensional gas chromatography–time-of-flight mass  
12 spectrometry. *Journal of Chromatography A*, 1536, pp.163-175.

13 Fattal, A.R., Kelly, S., Liu, A. and Giurco, D., 2016. Waste Fires in Australia: Cause for Concern?.

14 FEMA, 2002. Landfill fires—Their magnitude, characteristics, and mitigation.

15 Feng, S.J., Chen, Z.W., Chen, H.X., Zheng, Q.T. and Liu, R., 2018. Slope stability of landfills considering  
16 leachate recirculation using vertical wells. *Engineering Geology*, 241, pp.76-85.

17 Hall, D., Drury, D., Keeble, R., Morgans, A. and Wyles, R., 2007. Review and investigation of deep-seated  
18 fires within landfill sites. *Environment Agency: Bristol, UK*.

19 Huang, F.K., Wang, G.S. and Tsai, Y.L. 2013. Rainfall reliability evaluation for stability of municipal solid  
20 waste landfills on slope. *Mathematical Problems in Engineering*, 2013.

21 Huang, K., Chen, G., Khan, F. and Yang, Y., 2021. Dynamic analysis for fire-induced domino effects in  
22 chemical process industries. *Process Safety and Environmental Protection*, 148, pp.686-697.

23 Ibrahim, M.A., 2020. Risk of spontaneous and anthropogenic fires in waste management chain and hazards  
24 of secondary fires. *Resources, Conservation and Recycling*, 159, p.104852.

25 Ibrahim, M.A., Lönnermark, A. and Hogland, W., 2022. Safety at waste and recycling industry: Detection  
26 and mitigation of waste fire accidents. *Waste management*, 141, pp.271-281.

1 Idowu, I.A., Atherton, W., Hashim, K., Kot, P., Alkhaddar, R., Alo, B.I. and Shaw, A., 2019. An analyses of  
2 the status of landfill classification systems in developing countries: Sub Saharan Africa landfill  
3 experiences. *Waste Management*, 87, pp.761-771.

4 ISIPO (Iran small industries and industrial parks organization), 2020. Series of Tender Documents for landfill  
5 Design for Iran's Industrial Parks within 2008-2014 in Persian).

6 Jafari, N.H., Stark, T.D. and Merry, S., 2013. The July 10 2000 Payatas landfill slope failure. *ISSMGE*  
7 *International Journal of Geoengineering Case Histories*, 2(3), pp.208-228.

8 Jafari, N.H., Stark, T.D. and Rowe, R.K., 2014. Service life of HDPE geomembranes subjected to elevated  
9 temperatures. *Journal of Hazardous, Toxic, and Radioactive Waste*, 18(1), pp.16-26.

10 Jafari, N.H., 2015. *Elevated temperatures in waste containment facilities* (Doctoral dissertation, University  
11 of Illinois at Urbana-Champaign).

12 Jafari, N.H., Stark, T.D. and Thalhamer, T., 2017a. Progression of elevated temperatures in municipal solid  
13 waste landfills. *Journal of Geotechnical and Geoenvironmental Engineering*, 143(8), p.05017004.

14 Jafari, N.H., Stark, T.D. and Thalhamer, T., 2017b. Spatial and temporal characteristics of elevated  
15 temperatures in municipal solid waste landfills. *Waste management*, 59, pp.286-301.

16 Jahanfar, A., Amirmojahedi, M., Gharabaghi, B., Dubey, B., McBean, E. and Kumar, D. 2017. A novel risk  
17 assessment method for landfill slope failure: Case study application for Bhalswa Dumpsite,  
18 India. *Waste Management & Research*, 35(3), pp.220-227.

19 Kabir, S., 2017. An overview of fault tree analysis and its application in model based dependability  
20 analysis. *Expert Systems with Applications*, 77, pp.114-135.

21 Kabir, S. and Papadopoulos, Y., 2018. A review of applications of fuzzy sets to safety and reliability  
22 engineering. *International Journal of Approximate Reasoning*, 100, pp.29-55.

23 Kabir, S., Geok, T.K., Kumar, M., Yazdi, M. and Hossain, F., 2019. A method for temporal fault tree analysis  
24 using intuitionistic fuzzy set and expert elicitation. *Ieee Access*, 8, pp.980-996.

25 Khan, F.I. and Abbasi, S.A., 1999. Major accidents in process industries and an analysis of causes and  
26 consequences. *Journal of Loss Prevention in the process Industries*, 12(5), pp.361-378.

1 Khan, F.I. and Amyotte, P.R., 2004. Integrated inherent safety index (I2SI): a tool for inherent safety  
2 evaluation. *Process safety progress*, 23(2), pp.136-148.

3 Koda, E., Grzyb, M., Osiński, P. and Vaverková, M.D., 2019. Analysis of failure in landfill construction  
4 elements. In *MATEC Web of Conferences* (Vol. 284, p. 03002). EDP Sciences.

5 Koelsch, F., Fricke, K., Mahler, C. and Damanhuri, E., 2005, October. Stability of landfills-The Bandung  
6 dumpsite disaster. In *Proceedings Sardinia*.

7 Lavasani, S.M., Zendegani, A. and Celik, M., 2015. An extension to Fuzzy Fault Tree Analysis (FFTA)  
8 application in petrochemical process industry. *Process Safety and Environmental Protection*, 93,  
9 pp.75-88.

10 Li, Y., Li, J., Chen, S. and Diao, W. 2012. Establishing indices for groundwater contamination risk  
11 assessment in the vicinity of hazardous waste landfills in China. *Environmental pollution*, 165,  
12 pp.77-90.

13 Liu, Y., Fan, Z.P., Yuan, Y. and Li, H., 2014. A FTA-based method for risk decision-making in emergency  
14 response. *Computers & Operations Research*, 42, pp.49-57.

15 LMOP, 2002. Landfill Methane Outreach Program, Current Projects and Candidate Landfills, Environmental  
16 Protection Agency, January 10, 2002. <http://www.epa.gov/LMOP/projects.html> <retrieved:  
17 17/02/2022>

18 Mahmood, Y.A., Ahmadi, A., Verma, A.K., Srividya, A. and Kumar, U., 2013. Fuzzy fault tree analysis: a  
19 review of concept and application. *International Journal of System Assurance Engineering and*  
20 *Management*, 4(1), pp.19-32.

21 Martin, J.W., Stark, T.D., Thalhamer, T., Gerbasi-Graf, G.T. and Gortner, R.E., 2013. Detection of aluminum  
22 waste reactions and waste fires. *Journal of Hazardous, Toxic, and Radioactive Waste*, 17(3), pp.164-  
23 174.

24 Milosevic, L.T., Mihajlovic, E.R., Djordjevic, A.V., Protic, M.Z. and Ristic, D.P., 2018. Identification of  
25 Fire Hazards Due to Landfill Gas Generation and Emission. *Polish Journal of Environmental*  
26 *Studies*, 27(1).



- 1 Moqbel, S., 2009. Characterizing spontaneous fires in landfills.
- 2 Moqbel, S. and Reinhart, D., 2017. Spontaneous landfill fires: Investigation and simulation.
- 3 Moqbel, S., Reinhart, D. and Chen, R.H., 2010. Factors influencing spontaneous combustion of solid  
4 waste. *Waste Management*, 30(8-9), pp.1600-1607.
- 5 Nanda, S. and Berruti, F., 2021. Municipal solid waste management and landfilling technologies: a  
6 review. *Environmental Chemistry Letters*, 19(2), pp.1433-1456.
- 7 Nikkhah Shirazi, A., 2021. The Unactualized Certainty-Actuality Correspondence.
- 8 Obeid, A.A.A., Kamarudin, S. and Tohir, M.Z.M., 2020. Fire risk and health impact assessment of a  
9 malaysian landfill fire.
- 10 Onisawa, T., 1990. An application of fuzzy concepts to modelling of reliability analysis. *Fuzzy sets and*  
11 *Systems*, 37(3), pp.267-286.
- 12 Piadeh, F., Ahmadi, M. and Behzadian, K., 2018a. Reliability assessment for hybrid systems of advanced  
13 treatment units of industrial wastewater reuse using combined event tree and fuzzy fault tree  
14 analyses. *Journal of Cleaner Production*, 201, pp.958-973.
- 15 Piadeh, F., Alavi-Moghaddam, M. R. and Mardan, S. 2018b ‘Assessment of sustainability of a hybrid of  
16 advanced treatment technologies for recycling industrial wastewater in developing countries:  
17 Case study of Iranian industrial parks’, *Journal of Cleaner Production*, 170, pp. 1136–1150.
- 18 Pivato, A. 2011. Landfill liner failure: an open question for landfill risk analysis. *Journal of Environmental*  
19 *Protection*, 2(03), p.287.
- 20 Radosavljevic, J., Djordjevic, A., Ristic, G., Milosevic, L. and Vukadinovi, A., 2016. Landfill Fire  
21 Prevention. *Požární Ochrana*, 396, 398.
- 22 Rajakarunakaran, S., Kumar, A.M. and Prabhu, V.A., 2015. Applications of fuzzy faulty tree analysis and  
23 expert elicitation for evaluation of risks in LPG refuelling station. *Journal of Loss Prevention in the*  
24 *Process Industries*, 33, pp.109-123.
- 25 Reinhart, D., Joslyn, R. and Emrich, C.T., 2020. Characterization of Florida, US landfills with elevated  
26 temperatures. *Waste Management*, 118, pp.55-61.

1 Sabrin, S., Nazari, R., Karimi, M., Fahad, M.G.R., Everett, J. and Peters, R., 2021. Development of a  
2 conceptual framework for risk assessment of elevated internal temperatures in landfills. *Science of*  
3 *The Total Environment*, 782, p.146831.

4 Sadeghi, B., Sodagari, M., Nematollahi, H. and Alikhani, H. 2020. FMEA and AHP Methods in Managing  
5 Environmental Risks in Landfills: A Case Study of Kahrizak, Iran. *Environmental Energy and*  
6 *Economic Research*, pp.1-15.

7 Shi, S., Jiang, B. and Meng, X., 2018. Assessment of gas and dust explosion in coal mines by means of  
8 fuzzy fault tree analysis. *International Journal of Mining Science and Technology*, 28(6),  
9 pp.991-998.

10 Shu, M.H., Cheng, C.H. and Chang, J.R., 2006. Using intuitionistic fuzzy sets for fault-tree analysis on  
11 printed circuit board assembly. *Microelectronics Reliability*, 46(12), pp.2139-2148.

12 Sperling, T., 2002a. *Reducing the risk of landfill fire*. Available from: [www.landfillfire.com/papers/html](http://www.landfillfire.com/papers/html)  
13 [Accessed 25 November 2002].

14 Sperling, T., 2002b. *Extinguishing the Delta Shake and Shingle landfill fire*. Available from:  
15 [www.landfillfire.com/papers/html](http://www.landfillfire.com/papers/html) <retrieved: 17/02/2022>

16 Stark, T.D., Martin, J.W., Gerbasi, G.T., Thalhamer, T. and Gortner, R.E., 2012. Aluminum waste reaction  
17 indicators in a municipal solid waste landfill. *Journal of geotechnical and geoenvironmental*  
18 *engineering*, 138(3), pp.252-261.

19 Sugeno, M., 1999. *Fuzzy modeling and control: selected works of M. Sugeno*. CRC Press.

20 Toro, R. and Morales, L., 2018. Landfill fire and airborne aerosols in a large city: lessons learned and future  
21 needs. *Air Quality, Atmosphere & Health*, 11(1), pp.111-121.

22 UN DESA, United Nations Department of Economic and Social Affairs, 2018.  
23 [https://www.un.org/development/desa/en/news/population/2018-revision-of-world-](https://www.un.org/development/desa/en/news/population/2018-revision-of-world-urbanization-prospects.html)  
24 [urbanization-prospects.html](https://www.un.org/development/desa/en/news/population/2018-revision-of-world-urbanization-prospects.html) Last accessed 18 December 18.

25 USFA, United States Fire Administration, 2002. *Landfill fires: topical fire research series, vol 1, issue 18*.  
26 Available from: [www.usfa.fema.gov/applications/publications](http://www.usfa.fema.gov/applications/publications) <retrieved: 17/02/2022>

- 1 Vaverková, M.D., 2019. Landfill Impacts on the Environment. *Geosciences*, 9(10), p.431.
- 2 Vesely, B., 2002. Fault tree analysis (FTA): Concepts and applications. *NASA HQ*.
- 3 Xu, Y., Dong, L., Nai, C.X., Liu, Y.Q. and Liu, J.C. 2014. A Holistic Model of Leakage Risk Assessment in  
4 a Hazardous Waste Landfill. In *Advanced Materials Research*, 878, pp. 551-557.
- 5 Xu, D., Zhu, F., Lalit, B., Fan, X. and Liu, Q. 2021. Construction solid waste landfills: risk assessment and  
6 monitoring by fibre optic sensing technique. *Geomatics, Natural Hazards and Risk*, 12(1), pp.63-83.
- 7 Yazdi, M., Daneshvar, S. and Setareh, H., 2017. An extension to fuzzy developed failure mode and effects  
8 analysis (FDFMEA) application for aircraft landing system. *Safety science*, 98, pp.113-123.
- 9 Yazdi, M. and Kabir, S., 2017. A fuzzy Bayesian network approach for risk analysis in process  
10 industries. *Process safety and environmental protection*, 111, pp.507-519.
- 11 Yazdi, M., Kabir, S. and Walker, M., 2019. Uncertainty handling in fault tree based risk assessment: State of  
12 the art and future perspectives. *Process Safety and Environmental Protection*, 131, pp.89-104.
- 13 Zadeh, L.A., 1978. Fuzzy sets as a basis for a theory of possibility. *Fuzzy sets and systems*, 1(1), pp.3-28.

## 15

16

1: Responsible for directing the plan of firefighting operation in the local fire station.	4: Responsible for providing the financial budget and required executive decisions.
2: Responsible for holding the firefighting operation on-site.	5: Responsible for planning and supervising the execution of operations on-site.
3: Responsible for providing scientific guidance or recommendations in operations.	6: Hired by the board of trustees for operating the system.

Table A2. The results of FFTA stages for the landfill fire of case study

Code	Experts' relative weight and opinion						Aggregation fuzzy number (AFN <sub>i</sub> )	Crisp Failure Possibility (CFP <sub>i</sub> )	Failure probability (FP <sub>i</sub> )
	0.1972	0.1549	0.1972	0.1690	0.1690	0.1127			
BE1	VH	H	M	L	M	L	(0.3887, 0.5472, 0.7056)	0.5472	0.0069
BE2	VH	VH	H	M	H	VH	(0.6422, 0.7775, 0.9127)	0.7775	0.0304
BE3	M	H	H	VH	H	VH	(0.5972, 0.7429, 0.8887)	0.7429	0.0242
BE4	VH	VH	VH	H	H	H	(0.7098, 0.8324, 0.9549)	0.8324	0.0448
BE5	H	H	H	VH	VH	VH	(0.6901, 0.8176, 0.9451)	0.8176	0.0402
BE6	M	M	L	M	H	H	(0.3451, 0.5211, 0.6972)	0.5211	0.0058
BE7	H	VH	M	L	VH	VH	(0.5437, 0.6817, 0.8197)	0.6817	0.0164
BE9	H	M	M	H	H	H	(0.4944, 0.6620, 0.8296)	0.6620	0.0145
BE10	VH	VH	H	VH	VH	H	(0.7380, 0.8535, 0.9690)	0.8535	0.0526
BE11	VH	VH	H	M	H	VH	(0.6422, 0.7775, 0.9127)	0.7775	0.0304
BE12	H	H	M	H	VH	VH	(0.5972, 0.7429, 0.8887)	0.7429	0.0242
BE14	M	L	M	H	H	M	(0.3704, 0.5458, 0.7211)	0.5458	0.0068
BE15	H	M	L	M	L	L	(0.2634, 0.4296, 0.5958)	0.4296	0.0030
BE16	H	VH	H	M	H	L	(0.5239, 0.6746, 0.8253)	0.6746	0.0157
BE17	M	H	L	M	L	H	(0.3070, 0.4753, 0.6437)	0.4753	0.0042
BE18	H	H	M	H	H	M	(0.5070, 0.6725, 0.8380)	0.6725	0.0155
BE19	H	H	H	M	H	L	(0.4929, 0.6514, 0.8098)	0.6514	0.0135
BE20	VH	H	H	H	VH	H	(0.6732, 0.8049, 0.9366)	0.8049	0.0368
BE21	VH	VH	VH	H	VH	H	(0.7436, 0.8577, 0.9718)	0.8577	0.0544
BE23	VH	VH	H	VH	VH	VH	(0.7606, 0.8704, 0.9803)	0.8704	0.0603
BE24	VH	VH	H	H	H	VH	(0.6929, 0.8197, 0.9465)	0.8197	0.0408
BE25	H	VH	H	H	M	M	(0.4958, 0.7028, 0.8591)	0.6859	0.0168
BE26	VH	VH	H	VH	M	H	(0.6535, 0.7859, 0.9183)	0.7859	0.0322
BE29	M	H	M	L	L	M	(0.2789, 0.4542, 0.6296)	0.4542	0.0036
BE30	H	H	M	H	VH	H	(0.5746, 0.7260, 0.8775)	0.7260	0.0217
BE31	H	VH	M	L	L	L	(0.3465, 0.4986, 0.6507)	0.4986	0.0049
BE32	VH	VH	M	H	L	L	(0.4704, 0.6127, 0.7549)	0.6127	0.0106
BE33	H	H	L	M	L	L	(0.3098, 0.4683, 0.6268)	0.4683	0.0040
BE34	H	VH	L	L	M	L	(0.3408, 0.4915, 0.6422)	0.4915	0.0047
BE35	VH	H	H	M	H	H	(0.5887, 0.7373, 0.8859)	0.7373	0.0234
BE37	M	M	H	M	L	L	(0.3028, 0.4789, 0.6549)	0.4789	0.0043
BE38	M	L	L	M	L	M	(0.1958, 0.3697, 0.5436)	0.3697	0.0018

## Appendix B: Results details

**Table B1. The importance degree of BEs ranked in descending order for the LFI of the case study**

BEs	Type of fault	Importance degree	Rank	BEs	Type of fault	Importance degree	Rank
BE23	EF	0.23722	1	BE14	EF	0.02694	15
BE4	HF	0.20686	2	BE6	MF	0.02673	16
BE5	HF	0.18567	3	BE10	EF	0.02168	17
BE24	EF	0.16061	4	BE37	ECF	0.01691	18
BE2	EF	0.14057	5	BE17	EF	0.01648	19
BE11	MF	0.14057	5	BE29	ECF	0.01408	20
BE26	EF	0.12679	6	BE15	EF	0.01164	21
BE3	ECF	0.11195	7	BE21	ECF	0.01126	22
BE12	MF	0.11195	7	BE20	ECF	0.00761	23
BE30	EF	0.08550	8	BE38	ECF	0.00700	24
BE7	MF	0.07571	9	BE19	ECF	0.00280	25
BE25	EF	0.06623	10	BE35	EF	0.00223	26
BE16	EF	0.06170	11	BE32	HF	0.00097	27
BE18	EF	0.06088	12	BE31	HF	0.00045	28
BE9	EF	0.05695	13	BE34	HF	0.00043	29
BE1	MF	0.02717	14	BE33	HF	0.00037	30

**Table B2. Ranking of the importance degrees of IEs for the LFI of the case study**

IEs	Description	Type of fault	Importance degree	Ranking
IE1	Fire occurrence	MX	1	1
IE2	Lack of preparation for controlling fire	MX	1	1
IE5	Problem with firefighting operation	MX	0.64505	2
IE4	Surface fire	MX	0.51514	3
IE3	Subsurface fire	MX	0.48486	4
IE10	Accidental fire	MX	0.46628	5
IE17	Operational errors	EF	0.46406	6
IE8	The air intrusion into the landfill mass	MX	0.42792	7
IE6	Problem with fire suppression equipment	MF	0.35496	8
IE11	Problems with heavy equipment	MF	0.25252	9
IE14	Problems with cap	MX	0.20084	10
IE13	Existence of voids within the waste mass	EF	0.18849	11
IE19	Existence of fissures and cracks in the soil cover	MX	0.12349	12
IE12	Problems with the gas collection system	EF	0.03858	13
IE22	Poorly maintenance of the cap in all weather conditions	EF	0.02391	14
IE9	Spontaneous fire	MX	0.02168	15
IE15	Formation of shallow hot spots	ECF	0.02168	15
IE16	Surface catching fire	MX	0.00223	16
IE20	Existence of pilot ignition source	HF	0.00223	16

**Table B3. The importance and ranking of top 32 MCSs for the landfill fire of case study**

<b>MCSs</b>	<b>Probability</b>	<b>Importance degree</b>	<b>Ranking</b>	<b>MCSs</b>	<b>Probability</b>	<b>Importance degree</b>	<b>Ranking</b>
BE4.BE23	0.00270	0.04907	1	BE11.BE26	0.00098	0.01782	12
BE5.BE23	0.00243	0.04404	2	BE4.BE30	0.00097	0.01768	13
BE2.BE23	0.00184	0.03334	3	BE5.BE30	0.00087	0.01587	14
BE11.BE23	0.00184	0.03334	3	BE3.BE26	0.00078	0.01419	15
BE4.BE24	0.00183	0.03322	4	BE12.BE26	0.00078	0.01419	16
BE5.BE24	0.00164	0.02982	5	BE4.BE25	0.00075	0.01370	17
BE3.BE23	0.00146	0.02656	6	BE4.BE16	0.00070	0.01276	18
BE12.BE23	0.00146	0.02656	6	BE4.BE18	0.00069	0.01259	19
BE4.BE26	0.00144	0.02623	7	BE5.BE25	0.00068	0.01230	20
BE5.BE26	0.00130	0.02354	8	BE7.BE24	0.00067	0.01216	21
BE2.BE24	0.00124	0.02258	9	BE2.BE30	0.00066	0.01202	22
BE11.BE24	0.00124	0.02258	9	BE11.BE30	0.00066	0.01202	22
BE3.BE24	0.00099	0.01798	10	BE4.BE9	0.00065	0.01178	23
BE12.BE24	0.00099	0.01798	10	BE5.BE16	0.00063	0.01146	24
BE7.BE23	0.00099	0.01796	11	BE5.BE18	0.00062	0.01130	25
BE2.BE26	0.00098	0.01782	12	BE5.BE9	0.00058	0.01057	26

**Table B4. Role of expert's weight on FFTA results**

Code	Failure probability ( $FP'_i$ ) (%) <sup>1</sup>	Relative difference (%) <sup>2</sup>	Sensitivity analysis of BEs	
			Importance degree ( $FV - I$ )'	Ranking
TE	5.51	5.20	-	-
BE1	0.59	13.94	0.0233	14
BE2	3.17	-4.04	0.1396	5
BE3	2.68	-10.57	0.1181	7
BE4	4.24	5.29	0.1869	2
BE5	4.24	-5.50	0.1869	3
BE6	0.67	-15.00	0.0293	16
BE7	1.84	-12.28	0.0811	9
BE9	1.49	-3.01	0.0584	13
BE10	5.12	2.71	0.0197	17
BE11	3.17	-4.04	0.1396	5
BE12	2.68	-10.57	0.1181	7
BE14	0.67	2.72	0.0261	15
BE15	0.27	9.84	0.0104	21
BE16	1.34	14.40	0.0526	11
BE17	0.50	-19.38	0.0196	19
BE18	1.49	3.63	0.0584	12
BE19	1.15	15.40	0.0023	25
BE20	3.55	3.38	0.0071	23
BE21	5.12	5.91	0.0103	22
BE23	6.27	-3.90	0.2454	1
BE24	4.25	-3.91	0.1662	4
BE25	1.75	-3.70	0.0684	10
BE26	3.17	1.74	0.1241	6
BE29	0.37	-3.15	0.0144	20
BE30	2.28	-4.79	0.0892	8
BE31	0.44	10.34	0.0004	28
BE32	0.93	12.62	0.0008	27
BE33	0.37	7.17	0.0003	30
BE34	0.44	5.73	0.0004	29
BE35	2.28	2.54	0.0019	26
BE37	0.37	14.10	0.0144	18
BE38	0.19	-4.86	0.0073	24

1: Calculated based on equal relative weights for experts

2:  $100 \times (|FP_i - FP'_i|) / FP_i$